

# LifeSaver™ 195SS SERIES - LEVERS

## INSTITUTIONAL LIFE SAFETY CYLINDRICAL LOCKSETS


INSTITUTIONAL LIFE SAFETY LOCKSETS

MARKS #		DESCRIPTION	ANSI #	FINISH GROUPS
COMM. CYL.	IC CORE CYL.*			
N	—	PASSAGE	F75	32D
L	—	PRIVACY	F76	
LK	—	PRIVACY	F76 MOD.	
P	—	PATIO	F77	
DC	RDC	COMMUNICATING	F80	
B	RB	ENTRY	F82A	
AQ	—	EXIT	F83	
S	RS	CLASSROOM	F84	
F	RF	STOREROOM	F86	
DW	RDW	INSTITUTION	F87	
DA	RDA	VESTIBULE	F88	
FQ	—	EXIT	F89	
T	RT	CORRIDOR	F90	
TK	RTK	HOSPITAL/PRIV.	F90 MOD.	
GB	RGB	STORE DOOR	F91	
BS	RBS	SVC. STATION LOCK	F92	
H	—	HOTEL	F93	
DO	—	DUMMY TRIM OUTSIDE	—	
DT	—	FULL DUMMY TRIM	—	
NB	—	COMM. PASSAGE	F111	
FB	RFB	COMM. STOREROOM	F112	
SB	RSB	COMM. CLASSROOM	F113	
FEL	RFEL	ELECTRICALLY LOCKED		
FEU	RFEU	ELECTRICALLY UNLOCKED		

PACKED 6 PER CASE



195SSN  
Shown

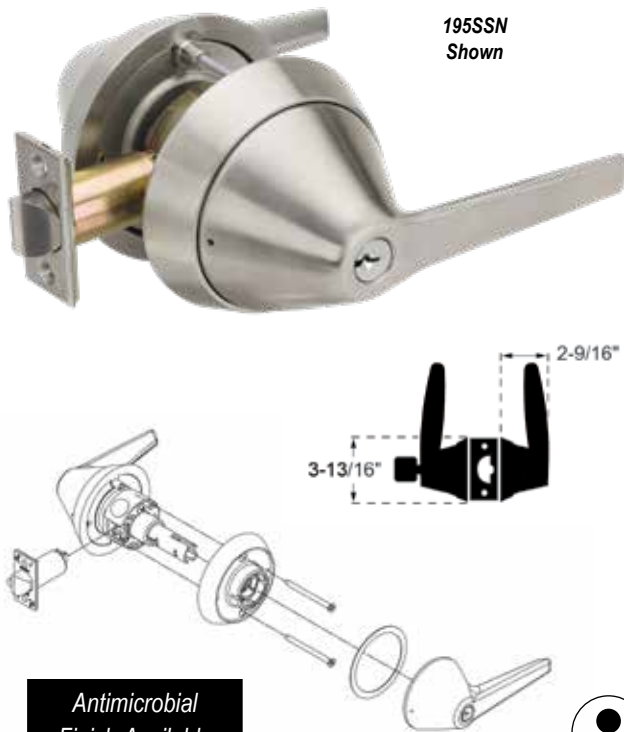

Antimicrobial  
Finish Available  
Option Code: AM



### Standard Features

- ANSI-A156.2 Grade 1, UL listed 3 Hr. Fire Rating
- Backset: 2-3/4" Standard, 2-3/8", 3-3/4", 5" Available
- Latch #1834, stainless steel nose
- Levers: Solid cast stainless steel
- Roses: Thru-bolted, spring loaded, #10 thru-bolts
- Strike: #1135, 4-7/8" ASA curved lip strike
- Door thickness: 1-5/8" to 1-7/8"
- Cylinder: MARKS "C" keyway, 6 pin w/ 2 keys
- Stainless steel retractor
- Clutch

OPTIONS	CODE	OPTIONS	CODE
For 2" doors	D1	Sargent conventional cylinder	F8
For 2-1/4" doors	D2	Corbin conventional cylinder	F9
Over 2-1/4" - 4" thickness	D9	Corbin 6 pin IC core	F12
2-3/8" backset, 1" x 2-1/4" face	E6	Yale 6 pin IC core	F14
2-3/4" backset, 3/4" throw, Gr. 1	E8	Sargent IC core	F20
5" backset, 9/16" throw, Gr. 1	E9		
3-3/4" backset, 9/16" throw, Gr. 1	E10		
Less cylinder	G3		
2-3/4" "T" strike	S3		

### \* Standard & HI-SECURITY™ IC Core Models:

Interchangeable Core models for 6 or 7 pin cores (not included). **Accepts:** Marks, Marks HI-SECURITY™, Medeco®, KeyMark™, Falcon, Schlage® small format & Best®  
**IC Core Tailpieces ARE Included. WHEN ORDERING IC CORE CYLINDER, ADD THE PREFIX "R" TO THE PART NUMBER ie: 5SS55RA/32D**