
B25



3-KNUCKLE FULL MORTISE CONCEALED EEARING HEAVY WEIGHT 4 112" x 4" 4 112" x 4 112"

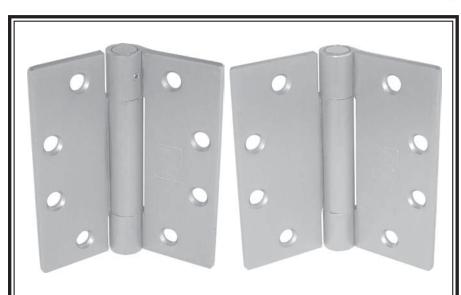

GENERAL PRODUCT INFORMATION: PBB, Inc. template hinges are manufactured to close tolerances and meet all specifications and requirements set by the American National Standards Institute (ANSI).

HINGE SWAGING: A standard swaging of our standard weight full mortise hinge when closed to parallel position provides a 1/16" clearance between leaves.

MATERIAL GAUGE:

.180 ± .005 for 4-1/2" x 4" .180 ± .005 for 4-1/2" x 4-1/2" 4C81 (ANSI A8111)

Steel-Polished and Plated or Bonderized and Prime Coated for Painting.

4C21 (ANSI A2111)

Brass-Polished and Plated

4C51 (ANSI A5111) Stainless Steel-Polished and Satin Finish

- •For heavy weight doors receiving high frequency service.
- •Concealed bearing for trouble free long life application.
- •Hole in bottom tip for easy pin removal.
- •Ball bearing hinges must be used on doors in conjunction with door closers and on all fire rated openings.
- •For hospital type, add HT to suffix of part number.
- •Non-rising removable pin.
- •Attractive slim barrel with flush pins and plugs.
- •All hinges are ANSI template.

OTHER SPECIFICATIONS:

Height of hinge:

4.50 + .000 - .015 for 4-1/2" x 4""

4.50 + .000 for 4-1/2" x 4-1/2" - .015

Width:

4.00 ± .015 for 4-1/2" x 4" 4.50 ± .015 for 4-1/2" x 4-1/2"

4-1/2" STANDARD SCREW SIZE

FHMS - 12-24 x 1/2" FHWS - 12 x 1-1/4"

PACKAGING INFORMATION:

One hinge per plastic bag, 3 hinges and 1 screw pack per unit carton.

16 unit carton or 48 hinges per master shipping carton.


1 screw pack includes all machine screws (24), and 1/2 wood screws (12). ATMS & AWS also available.



3-KNUCKLE FULL MORTISE CONCEALED BEARING

HEAVY WEIGHT 5" x 4" 5" x 4 112" 5" x 5"



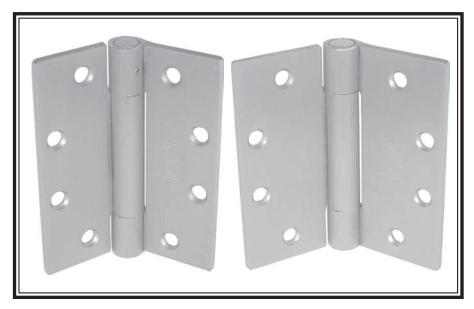

GENERAL PRODUCT INFORMATION: PBB, Inc. template hinges are manufactured to close tolerances and meet all specifications and requirements set by the American National Standards Institute (ANSI).

HINGE SWAGING: A standard swaging of our standard weight full mortise hinge when closed to parallel position provides a 1/16" clearance between leaves.

MATERIAL GAUGE:

 $.190 \pm .005$ for 5" x 4" $.190 \pm .005$ for 5" x 4-1/2"

.190 ± .005 for 5" x 5"

4C81

(ANSI A8111)

Steel-Polished and Plated or Bonderized and Prime Coated for Painting.

4C21 (ANSI A2111)

Brass-Polished and Plated

4C51 (ANSI A5111) Stainless Steel-Polished and Satin Finish

- •For heavy weight doors receiving high frequency service.
- •Concealed bearing for trouble free long life application.
- •Hole in bottom tip for easy pin removal.
- •Ball bearing hinges must be used on doors in conjunction with door closers and on all fire rated openings.
- •For hospital type, add HT to suffix of part number.
- •Non-rising removable pin.
- •Attractive slim barrel with flush pins and plugs.
- •All hinges are ANSI template.

OTHER SPECIFICATIONS:

Height of hinge:

5.00 + .000 - .015 for 5" x 4"

5.00 + .000 - .015 for 5" x 4-1/2"

5.00 + .000 - .015 for 5" x 5"

Width:

 $4.00 \pm .015$ for 5" x 4"

 $4.50 \pm .015$ for 5" x 4-1/2"

 $5.00 \pm .015$ for 5" x 5"

5" STANDARD SCREW SIZE

FHMS - 12-24 x 1/2" FHWS - 12 x 1-1/2"

PACKAGING INFORMATION:

One hinge per plastic bag, 3 hinges and 1 screw pack per unit carton.

12 unit carton or 36 hinges per master shipping carton.

1 screw pack includes all machine screws (24), and 1/2 wood screws (12). ATMS & AWS also available.



3-KNUCKLE FULL MORTISE CONCEALED BEARING

HEAVY WEIGHT 6" x 4 1|2" 6" x 5" 6" x 6" B27



GENERAL PRODUCT INFORMATION: PBB, Inc. template hinges are manufactured to close tolerances and meet all specifications and requirements set by the American National Standards Institute (ANSI).

HINGE SWAGING: A standard swaging of our standard weight full mortise hinge when closed to parallel position provides a 1/16" clearance between leaves.

4C81 (ANSI A8111)

Steel-Polished and Plated or Bonderized and Prime Coated for Painting.

4C21 (ANSI A2111)

Brass-Polished and Plated

(ANSI A5111) Stainless Steel-Polished and Satin Finish

- •Recommended for over 3'4" width doors and having a thickness of 2" or more.
- •For heavy weight doors receiving high frequency service.
- •Ball bearing hinges must be used on doors in conjunction with door closers and on all fire rated openings.
- •For hospital type, add HT to suffix of part number.
- •All hinges are ANSI template.

OTHER SPECIFICATIONS:

Height of hinge: +.000for 6" x 4-1/2" 6.00 -.015

+ .000 for 6" x 5" 6.00 - .015 6.00 + .000

for 6" x 6" - .015

Width:

 $4.50 \pm .015$ for 6" x 4-1/2" $5.00 \pm .015$ for 6" x 5" $6.00 \pm .015$ for 6" x 6"

MATERIAL GAUGE:

.200 ± .005 for 6" x 4-1/2" $.200 \pm .005$ for 6" x 5" .200 ± .005 for 6" x 6"

6" STANDARD SCREW SIZE

FHMS - 1/4-20 x 1/2" FHWS -- 14 x 1-1/2"

PACKAGING INFORMATION:

One hinge per plastic bag, 3 hinges and 1 screw pack per unit carton.

4 unit carton or 12 hinges per master shipping carton.


1 screw pack includes all machine screws (30), and 1/2 wood screws (15). ATMS & AWS also available.



3-KNUCKLE FULL MORTISE CONCEALED BEARING

HEAVY WEIGHT 8" x 6" 8" x 8"

B26

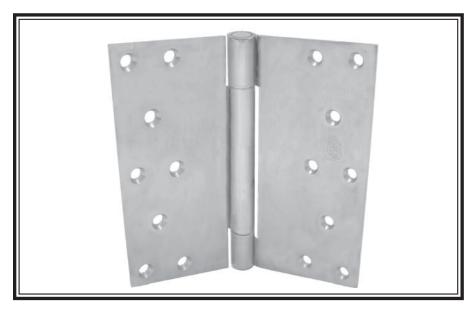

GENERAL PRODUCT INFORMATION: PBB, Inc. template hinges are manufactured to close tolerances and meet all specifications and requirements set by the American National Standards Institute (ANSI).

HINGE SWAGING: A standard swaging of our standard weight full mortise hinge when closed to parallel position provides a 1/16" clearance between leaves.

4C81

(ANSI A8111)

Steel-Polished and Plated or Bonderized and Prime Coated for Painting.

4C21 (ANSI A2111)

Brass-Polished and Plated

(ANSI A5111)

Stainless Steel-Polished and Satin Finish

- •Recommended for over 3'4" width doors and having a thickness of 2" or more.
- •For heavy weight doors receiving high frequency service.
- •Ball bearing hinges must be used on doors in conjunction with door closers and on all fire rated openings.
- •For hospital type, add HT to suffix of part number.
- •All hinges are ANSI template.

OTHER SPECIFICATIONS:

Height of hinge:

+ .000 for 8" x 6" 8.00 -.015

8.00 + .000 for 8" x 8" - .015

Width:

 $6.00 \pm .015$ for 8" x 6"

 $8.00 \pm .015$ for 8" x 8"

MATERIAL GAUGE:

.200 ± .005 for 8" x 6" .200 ± .005 for 8" x 8"

8" STANDARD SCREW SIZE

FHMS - 1/4-20 x 1/2" FHWS - 14 x 1-1/2"

PACKAGING INFORMATION:

One hinge per plastic bag, 3 hinges and 1 screw pack per unit carton.

2 unit carton or 6 hinges per master shipping carton.

1 screw pack includes all machine screws (48), and 1/2 wood screws (24). ATMS & AWS also available.




L10



FULL MORTISE HEAVY WEIGHT TEMPLATE

2B - 2P - 4B - 4C - 4F 4-112" x 4", 4-112" x 4-112"

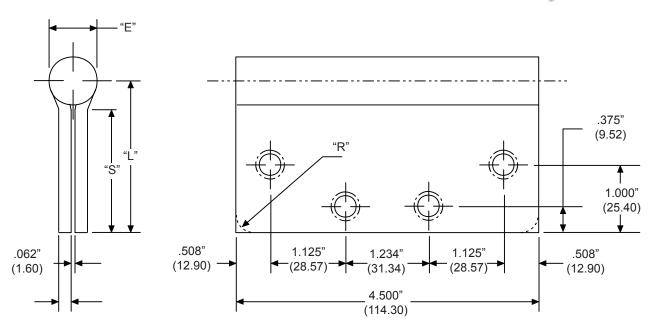

Part Number			Gauge	"E"	"L"	"S"	"R"
Steel	Brass	Stainless	of Metal	Outside Dia.	Leaf Width	Swage Line	Corner Radius
2B81/2P81	-	2B51/2P51	.134"	.600"	2.00"	1.63"	Square
2B81/2P81	-	2B51/2P51	.134"	.600"	2.25"	1.88"	Square
4B81*/4C81	4B21/4C21	4B51/4C51	.180"	.720"	2.00"	1.57"	Square, 1/4", 5/8"
4B81*/4C81	4B21/4C21	4B51/4C51	.180"	.720"	2.25"	1.82"	Square, 1/4", 5/8"

^{*}Also available as welding butts with identical dimensions and the exclusion of screw holes.

NOTE:

•1 screw pack includes all machine screws (24), and 1/2 wood screws (12). ATMS & AWS also available.

•Screw size: FHMS - 12-24 x 1/2"

FHWS - 12 x 1-1/4"

All hinges are ANSI template.


PBB, Inc.
World Class Hinges
1311 E. Philadelphia Street • Ontario • CA 91761 • USA
PBB reserves the right to make changes without notice.



 \mathbf{L} Ω

FULL MORTISE HEAVY WEIGHT TEMPLATE

4B - 4C - 4F 5" x 4", 5" x 4-1|2", 5" x 5"

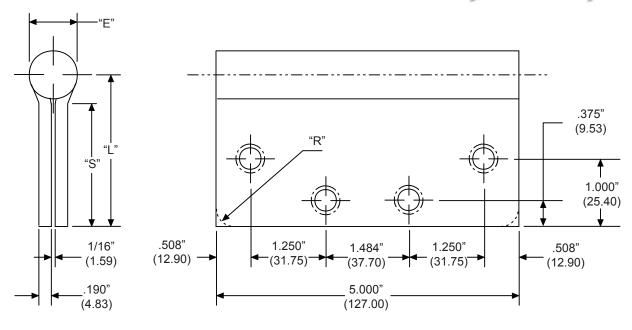

Part Number			Gauge	"E"	"L"	"S"	"R"
Steel	Brass	Stainless	of Metal	Outside Dia.	Leaf Width	Swage Line	Corner Radius
4B81*/4C81	4B21/4C21	4B51/4C51	.190"	.740"	2.00"	1.56"	Square, 1/4", 5/8"
4B81*/4C81	4B21/4C21	4B51/4C51	.190"	.740"	2.25"	1.81"	Square, 1/4", 5/8"
4B81*/4C81	4B21/4C21	4B51/4C51	.190"	.740"	2.50"	2.06"	Square, 1/4", 5/8"

^{*}Also available as welding butts with identical dimensions and the exclusion of screw holes.

NOTE:

1 screw pack includes all machine screws (24), and 1/2 wood screws (12). ATMS & AWS also available.
 Screw size: FHMS - 12-24 x 1/2"

FHWS - 12 x 1-1/2"

•All hinges are ANSI template.


Template: 4B60

L12



FULL MORTISE HEAVY WEIGHT TEMPLATE

4B - 4C - 4F 6" x 4-112", 6" x 5", 6" x 6"

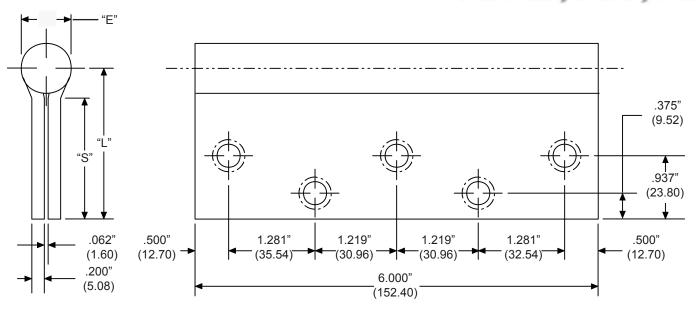

Part Number			Gauge	"E"	"L"	"S"	"R"
Steel	Brass	Stainless	of Metal	Outside Dia.	Leaf Width	Swage Line	Corner Radius
4B81/4C81	4B21/4C21	4B51/4C51	.200" *	.740"	2.25"	1.80"	Square, 1/4", 5/8"
4B81/4C81	4B21/4C21	4B51/4C51	.200" *	.740"	2.50"	2.05"	Square, 1/4", 5/8"
4B81/4C81	4B21/4C21	4B51/4C51	.200" *	.740"	3.00"	2.55"	Square, 1/4", 5/8"

NOTE:

•1 screw pack includes all machine screws (30), and 1/2 wood screws (15). ATMS & AWS also available.

•Screw size: FHMS - 1/4-20 x 1/2"

FHWS - 14 x 1-1/2"

•*Stainless steel hinges have .190" (4.83) material thickness.

•All hinges are ANSI template.