

### MODEL 280

#### Description & Features

- Half surface
- Handed
- Flush door and frame application only
- Optional top pivot where door portion cannot be mortised
- 1-3/4" (44mm) door only
- 3/4" (19mm) offset (measured from centerline of pivot to face of door)
- Contact factory if door is not flush
- Non-ferrous base material
- Furnished with wood and machine screws
- Available finishes: plated (280, 280-20); plated or sprayed (F280)

#### Optional Features


- Available with longer than standard pivot pins. Increments are 1/4" (6mm), 1/2" (13mm), 3/4" (19mm) only

#### Compliance

- Available for fire door assemblies (ferrous material) – specify F280
- For 20-minute label suffix “-20” to the part number
- Cal Fire 3725-0047:0108 (-20 min)



#### Technical Information

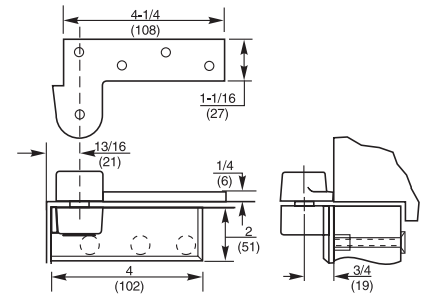

### MODEL 380

#### Description & Features

- Half mortise
- Handed
- Flush door and frame application only
- Optional top pivot where jamb portion cannot be mortised
- Designed for channel iron door frames with aluminum, hollow metal or wood doors
- 3/4" (19mm) offset (measured from centerline of pivot to face of door)
- Non-ferrous base material
- Furnished with wood and machine screws
- Available finishes: plated (380, 380-20); plated or sprayed (F380)

#### Optional Features

- Door portion from L180 pivot is available if lead-lined doors are used – specify L380 and door thickness
- Available with longer than standard pivot pins. Increments are 1/4" (6mm), 1/2" (13mm), 3/4" (19mm) only

#### Compliance

- Available for fire door assemblies (ferrous material) – specify F380
- For 20-minute label suffix “-20” to the part number
- Cal Fire 3725-0047:0108 (-20 min)



#### Technical Information

