

VON DUPRIN®

98/99
Series


Exit devices



Strikes


Strikes for rim devices

264

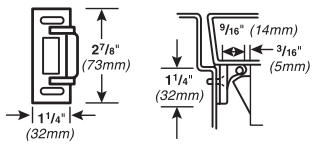


Projection 9/16" (14mm)

299

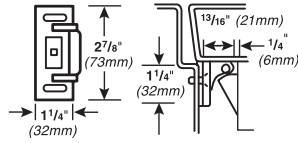


Projection 13/16" (21mm)

299F

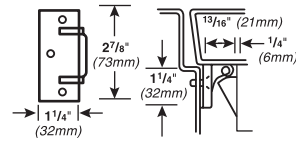


Projection 13/16" (21mm)

499F

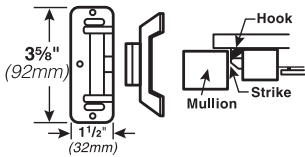


Projection 15/16" (24mm)

1408

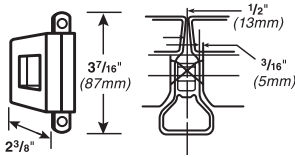


One per pair of doors

1439-Blade stop

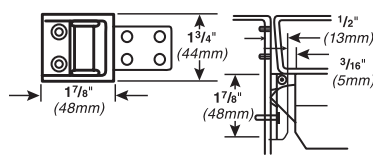


Projection 1/2" (13mm)

1410-Integral stop

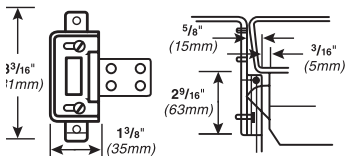


Projection 1/2" (13mm)

1606

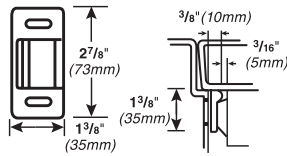

Projection 3/8" (10mm)
(Panic devices only)


1609

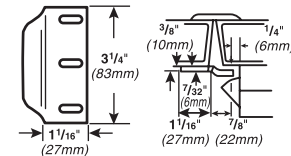

- Requires coordinator
- For panic exit application only, not fire rated


XP Strikes for rim devices

909



Projection 13/16" (21mm)


954



Projection 7/8" (22mm)
(For fire rated double door applications)


Strikes for vertical cable devices

249 - Top strike



Projection 9/16" (14mm)


349 - Bottom strike



Projection 1/8" (3mm)


Strikes for 98/9950WDC devices

150



Projection 9/16" (14mm)

450



Projection 1/8" (3mm)