




## 630F Series Wide Pull/Thumbpiece Trim

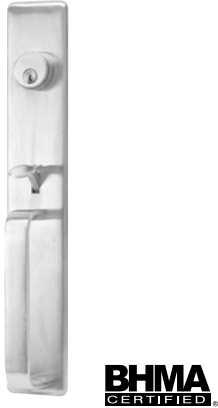

- Certified ANSI/BHMA A156.3, Grade 1.
- Trim through-bolts to exit device for strength.
- Beveled sides improve attack resistance.
- Flush cylinder in 6-pin applications for additional security.
- 1-3/4" (44mm) door standard. For doors through 2-1/4" (57mm) or shim-mounted devices, specify on order.
- Plate Dimensions: 2-3/4" x 15-1/2" x 5/8" (70mm x 394mm x 16mm).
- Pull Dimensions: 6-7/16" (164mm) on centers x 2-1/8" (54mm) projection.
- Cylinders not included. See pages 26-28 for cylinder options.
- Finishes: 613E, 626, 630, 693, BSP
- Trim ordering example: 630F x 630
- 5-year limited warranty.

Applications	Cylinder	Exit Only Blank Plate	Nightlatch Access by Key	Nightlatch Cylinder by Pull	Classroom Cylinder Controls T-Piece	Storeroom Cylinder Controls T-Piece	Dummy Trim Pull Plate	Passage Active T-Piece
2100(F) 2150(F) 2110(F) 2120(F) 2160(F) 2170(F)	Rim	630F	631F <sup>2</sup>	632F <sup>2</sup>	633F	633F <sup>1</sup>	634F	635F
ANSI		01	03	03	05	06	02	15

<sup>1</sup> 06 achieved with single trim modification at installation.

<sup>2</sup> Not recommended for use with vertical rod exit devices.

For 626 & 630 finishes the escutcheon is plated to simulate stainless steel. Optional door thickness available up to 4-1/2", specify on order.

# Functions



SquareBolt® (Type 1 or 28) 2150(F)	Rim (Type 1) 2100(F)	Surface Vertical Rod (Type 2) 2110(F) 2170(F90)	Concealed Vertical Rod (Type 7 & 8) 2120(F) 2160(F90)	Function Description	ANSI Function No.	Trim Model Number
				Exit Only, No Trim/Exit Only, Blank Plate	01	620F 630F
				Pull to Open (Dummy Trim)	02	214F 589F <sup>1,2</sup> 448F <sup>1,2</sup> 624F 629F <sup>2</sup> 449F <sup>1,2</sup> 625F 634F <sup>2</sup> 588F <sup>1,2</sup> 628F <sup>1,2</sup>
				Key Retracts Latchbolts (NL)	03	121NL 581F <sup>2</sup> 213F 621F 631F 217F 623F 632F <sup>2</sup> 441F <sup>2</sup> 627F <sup>2</sup>
				Entrance by Thumbpiece (Key Locks/ Unlocks Thumbpiece)	05	633F
				Key Unlocks Thumbpiece (Key Removable When Locked)	06	633F <sup>1</sup>
				Entrance by Lever (Key Locks/ Unlocks Lever)	08	446F <sup>2</sup> 586F <sup>2</sup> 626F <sup>2</sup>
				Key Unlocks Lever (Key Removable When Locked)	09	626F <sup>1,2</sup>
				Cylinder Controls Thumbturn	11	603F
				Key & Thumbturn (Key Removable When Locked)	12	
				Lever Always Active (Passage)	14	448F <sup>2</sup> 588F <sup>2</sup> 628F <sup>2</sup>
				Thumbpiece Always Active (Passage)	15	635F

Sectional dummy trim (02) features levers that will turn, but will not operate the devices. For rigid lever use AU629F, or AU449F. Illustrations show typical function features, rather than pictorial renderings of the trims listed. Specific trim details are shown on pages 13-21.

<sup>1</sup> Trims require an easy field change to adapt them for the charted function. <sup>2</sup> ADA compliant trim. <sup>3</sup> Application not recommended