

# INVERTED Y-BLADE LOUVER: 800 SERIES

L5


Inverted "Y" Blades Recommended for Schools, Class "A" and Institutional Buildings.



800A1 in Optional Stainless Steel Finish

## SPECIFICATIONS:

<b>Material:</b>	18 gauge CRS frame and 20 gauge blades. Min size 6" x 4", Max 48" x 80". Multiple sections can be combined for larger sizes	
<b>Construction:</b>	<b>Louvers:</b> Inverted "Y" blades with 1" blade spacing are attached by interlocking construction to the 1" deep, welded frame. Non-vision. <b>800A1 Frame:</b> 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.	
<b>Door:</b>	_____ 1-3/4" Any Style. _____ 1 3/8"-1 3/4" - 800CORE, 800C, 800A.	<b>Door cutout = order size.</b>
<b>Mounting Options:</b>	_____ <b>Select one mounting option from table below.</b>	
<b>Fasteners:</b>	Phillips head screws #8 x 3/4" to match finish.	
<b>Powder Coat Finishes:</b>	_____ (B) Mineral Bronze (std color) _____ (BK) Black _____ (FBK) Flat Black _____ (SI) Silver _____ (SB) SC Beige _____ (GH) Gray Hammertone _____ (S) Sand _____ (AB) AMS Beige _____ (G) Gray (A1 stock color) _____ (W) White _____ (R) Red <b>Color Samples Online.</b>	
<b>Free Flow Area:</b>	50% free area.	

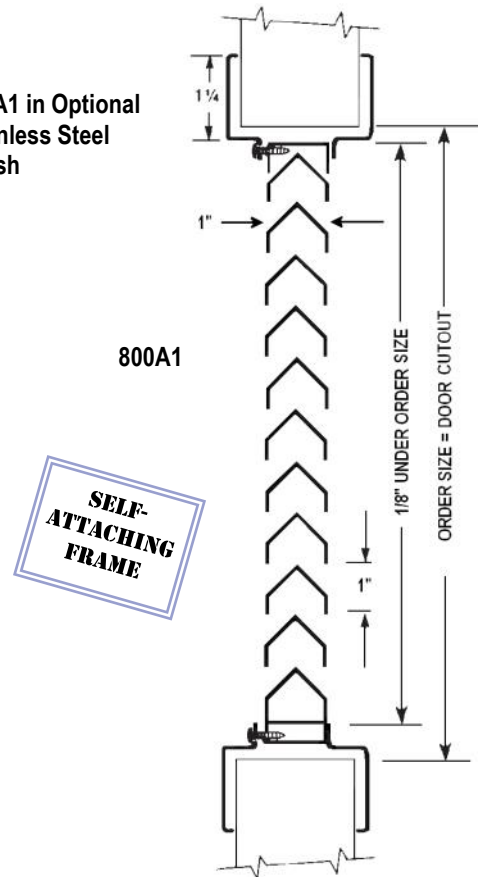

## OPTIONAL FEATURES AT AN ADDITIONAL COST:

<b>Finishes &amp; Materials:</b>	_____ (S) 18 gauge frame and 20 gauge stainless steel, #4 finish _____ 16 gauge CRS _____ (J) Galvanneal sheet for exterior use and corrosion-resistance _____ (E) Electro Galvanized for corrosion resistance & exterior use
<b>Fasteners:</b>	_____ Torx _____ Other: _____
<b>Screen:</b>	_____ 18x14 mesh insect screen installed in roll-formed aluminum frame _____ aluminum _____ bronze _____ fiberglass _____ stainless _____ Bird Screen.
<b>Custom:</b>	Custom sizes, other door thickness, round frame, other options; Contact Customer Service.

**STOCK ITEM— 800A1 IN STOCK FOR NEXT DAY SHIPMENT  
IN SEVERAL STANDARD SIZES FROM MOST WAREHOUSES**

**Order Format:** 800 \_\_\_\_\_  
**Example:** 800A1 1212S A,A1,CORE,C Option S,J,E W H Color

DOOR MOUNTING OPTIONS - SELECT ONE	
<b>800A1:</b> Self-attaching, vandal-proof design; basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; fits 1-3/4" door only.	
<b>800CORE:</b> Basic blade unit only; for interior door or as transom louver held in place with wood or metal moulding (furnished by others); any size door.	
<b>800C:</b> Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal moulding (by others) used on opposite side; fits any size door.	
<b>800A:</b> Basic blade unit with flanged frame welded to face (corridor) side and separate flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".	

  <small>CONSTRUCTION PRODUCTS GROUP</small>	<b>Distributor:</b> _____	<b>Width:</b> _____ x <b>Height:</b> _____
	<b>Architect:</b> _____	<b>Quantity:</b> _____
	<b>Contractor:</b> _____	<b>Model:</b> _____
	<b>Project:</b> _____	<b>Date:</b> _____ <b>Version:</b> ALPDS1605
800-554-6077 <a href="mailto:QUOTES@ACTIVARCPG.COM">QUOTES@ACTIVARCPG.COM</a> <a href="mailto:ORDERS@ACTIVARCPG.COM">ORDERS@ACTIVARCPG.COM</a> <a href="mailto:SALES@ACTIVARCPG.COM">SALES@ACTIVARCPG.COM</a> FAX: 952-835-2218 VISIT <a href="http://WWW.ACTIVARCPG.COM">WWW.ACTIVARCPG.COM</a> FOR THE MOST UPDATED PRODUCT INFORMATION © ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2016 MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX		