

PDL3500 Series Rugged mortise lock trim combined with digital and/or Prox card Access - All in a very weather-resistant, standalone lock

# Trilogy® Prox Mortise Locks by Alarm Lock

## AUDIT TRAIL ACCESS OPTIONS



**AL-IR1 Infrared Printer:**  
Prints the event log and user code with hand-held convenience.

**AL-DTMII Data Transfer Module:**  
Module used to transfer program data from the PC to the lock and receive Audit Trail from the lock. Can transfer program data for up to 48 locks.



**DL-WINDOWS SOFTWARE: Version 292 or higher**  
Windows-format software used to create programming, manager users and schedules, receive Audit Trail from lock, program the lock using PC or laptop, program the AL-DTMII to program multiple locks and configure the AL-DTMII to transfer data.



**AL-PRE: Prox Card Reader/Enroller**  
Enables instant, automatic enrollment of Prox Cards into DL-Windows (just tap the prox Card/fob device to the unit's faceplate to enroll!)  
Supports all Prox Cards and Prox Keyfobs (supported by PDL5000)  
Simultaneous card enrollment, downloading or lock polling - all on just one serial port. Replaces AL-PCI. 9V Battery operation (6 mos. to 1 year, typical)

Left-hand (LH)  
Use Trilogy  
PDL3500L



OUTSIDE

Left-hand  
Reverse (LHR)  
Use Trilogy  
PDL3500R



Right-hand (RH)  
Use Trilogy  
PDL3500R



OUTSIDE

Right-hand  
Reverse (RHR)  
Use Trilogy  
PDL3500L



### MORTISE LOCK ORDERING INFORMATION

**PDL 35 00 DB R /26D EX**

**Model & Series:**  
PDL35 = Trilogy Prox Mortise Series

**Trim:**  
00 = Standard Lever  
75 = Regal Curved Lever (U.S. Option Only)

**Lock Body:**  
DB = Dead Bolt  
CR = Class Room (U.S. Only)

**Handing:**

Your Door -	Order -
Left Handed	L
Right Handed	R
Left Hand Reverse Bevel	R
Right Hand Reverse Bevel	L

(Note: Trim is non-handed. Lock body is field reversible.)

**Finish:**  
/3 = US3 Polished Brass  
/26 = US26 Polished Chrome  
/26D = US26D Satin Chrome  
/5 = US5 Antique Brass  
/10B = Duronodic

**European Model Suffix**  
**Not Used For U.S. Models**

\*Note: Standard Lever for U.S. Models is Straight Lever. Standard Lever for European Models is Curved Tubular Lever




**ALARM LOCK SYSTEMS, Inc.** • A Division of the NAPCO Security Group  
345 Bayview Avenue • Amityville, NY • 11701 • USA  
1-800-ALA-LOCK • 631-789-4871 • Fax: 631-789-3383 • www.alarmlock.com



Trilogy® is a registered trademark of Alarm Lock. ©Alarm Lock, 2002 Specifications subject to change. Patents Pending. ALA168

## PDL3500 Series

Feature-Rich, Standalone. Proximity/Digital Locks With Audit Trail Feature

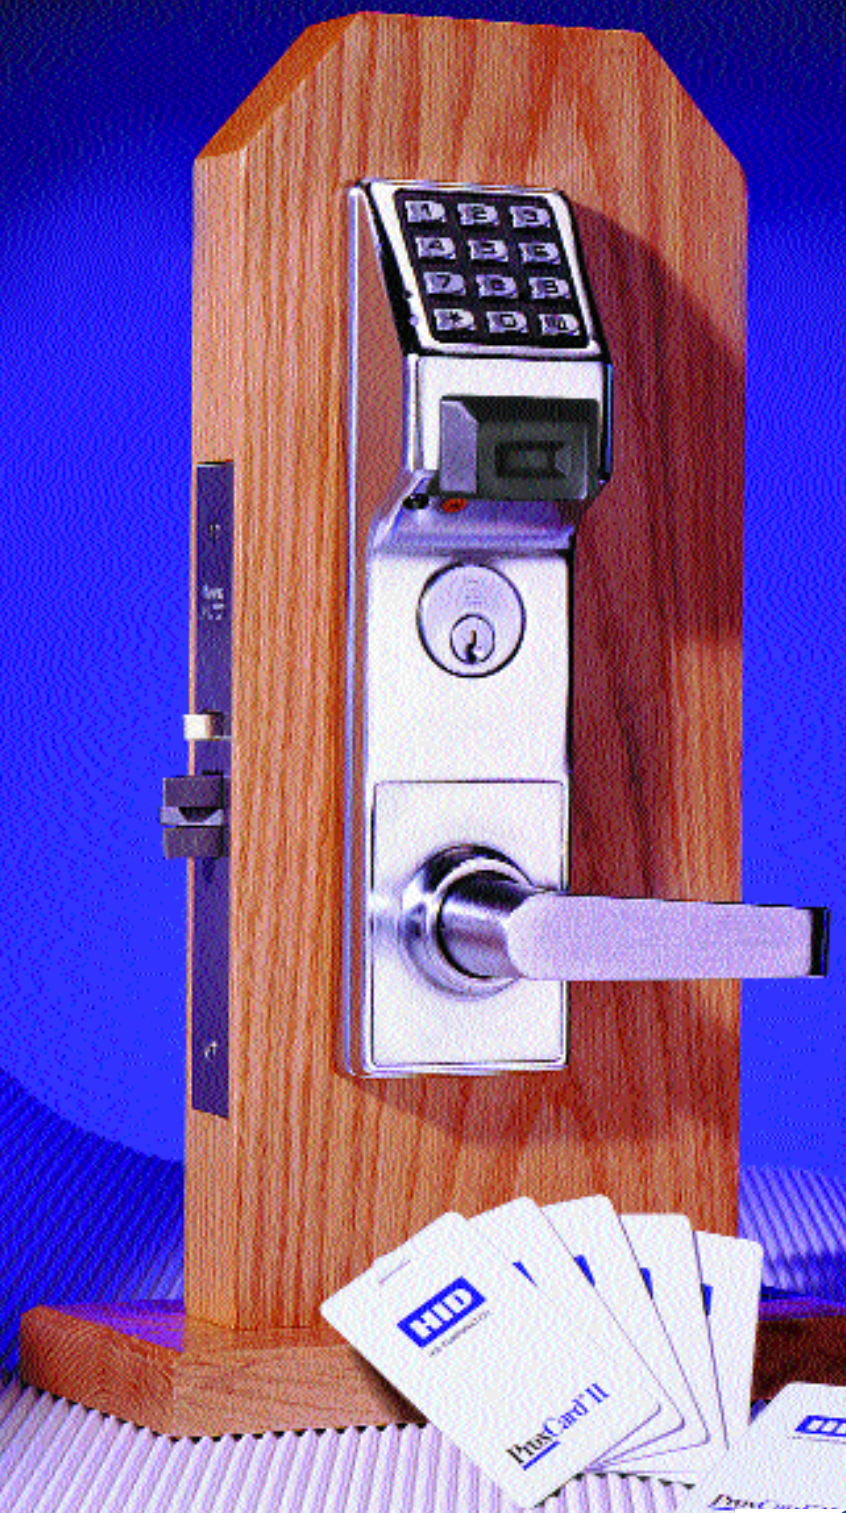

Rugged mortise lock trim combined with digital and/or Prox card Access - All in a very weather-resistant, standalone lock

Trilogy® Prox Mortise Locks by Alarm Lock

## AUDIT TRAIL ACCESS OPTIONS



**AL-IR1 Infrared Printer:**  
Prints the event log and user code with hand-held convenience.

**AL-DTMII Data Transfer Module:**  
Module used to transfer program data from the PC to the lock and receive Audit Trail from the lock. Can send program data for up to 96 locks.



**DL-WINDOWS SOFTWARE: Version 294 or higher**

Windows-format software used to create programming, manager users and schedules, receive Audit Trail from lock, program the lock using PC or laptop, program the AL-DTMII to program multiple locks and configure the AL-DTMII to transfer data. DL-WINDOWS is packed with AL-PCI2



**For Prox Models, AL-PRE:**  
Prox Card Reader/Enroller Enables instant, automatic enrollment of Prox Cards into DL-Windows (just tap the prox Card/fob device to the unit's faceplate to enroll!) Supports all Prox Cards and Prox Keyfobs. Simultaneous card enrollment, downloading or lock polling – all on just one serial port. (Replaces AL-PCI2.) 9V Battery operation.

## ORDERING INFORMATION

### EXIT TRIM ORDERING INFORMATION

<b>ETPDL-</b>		<b>1/</b>	<b>S/</b>	<b>26D</b>	<b>V99</b>
<b>TYPE:</b>		<b>Finish:</b>			
DL = Digital Only		26D = US26D Satin Chrome			
PDL = Digital with Prox		10B = Duronodic			
<b>DOOR THICKNESS:</b>		26 = US26 Polished Chrome			
1 = 1 3/4" Standard		3 = US3 Polished Brass			
2 = 2", Special Order		5 = US5 Antique Brass			
3 = 2 1/4", Special Order		<b>PANIC EXIT DEVICE BRANDS</b>			
4 = 2 1/2", Special Order		V99 = Von Duprin 99			
<b>HANDLE:</b>		C50 = Corbin ED5000 & Yale			
R = Regal		D93 = Dorma 9300			
S = Straight (ADA Compliant; Meets Titles 19 & 24, C.S.F.M.)		A38 = Arrow 3800			
		S88 = Sargent 8800			
For other Exit Devices call the factory.					

**IMPORTANT:** See separately ordered Cylinder Adapter Kits Pg.3  
**NOTE:** All ETPDL & ETDL Series Models are dependably Weather-Resistant.



**ALARM LOCK SYSTEMS, Inc.** • A Division of the NAPCO Security Group  
3ayview Avenue • Amityville, NY • 11701 • USA  
)-ALA-LOCK • 631-789-4871 • Fax: 631-789-3383 • www.alarmlock.com

ALARM LOCK

Sweets File# 08710/ALA Buy Line 3425


Trilogy® is a registered trademark of Alarm Lock. ©Alarm Lock, 2002 Specifications subject to change. Patents Pending  
All other brands trademarks are of their respective companies.

ALA169

*Add Proven Trilogy Convenience,  
Programming, Flexibility  
and Audit Trail To Most Manufacturers'  
Panic Exit Devices*



EXTERIOR DOOR

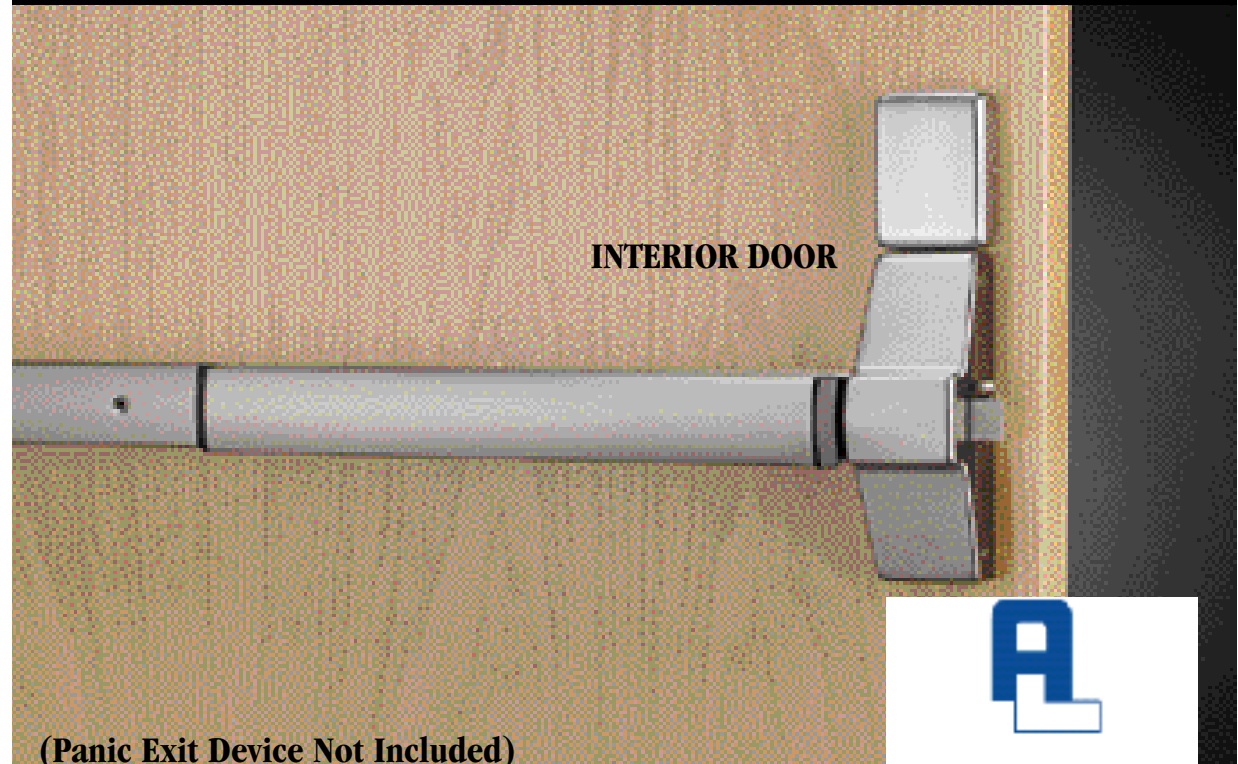

INTERIOR DOOR

(Panic Exit Device Not Included)



Add Trilogy Convenience, Programming, Flexibility & Audit Trail To Most Manufacturers' Exit Devices  
Trilogy® Exit & Trilogy Exit with Prox by Alarm Lock

Trilogy® Exit & Trilogy Exit with Prox by Alarm Lock  
Digital Keypad and/or Prox Reader Models Compatible With Most Manufacturers' Exit Devices