



Half Saddle Threshold and Extended Width Components 322




Materials & Finishes

Aluminum alloy 6063, T5 temper
Mill finish
DKB - dark bronze finish


- 3" wide x 1/2" tall
- Fluted top
- BHMA certified to ANSI/BHMA A156.21 1,000 lb. load test
- Typical wall thickness .110"
- * Weight: .48 lbs./ft.
- #10 x 1-1/2" FH zinc plated wood screws included. Dark bronze supplied with DKB thresholds

* When installed with the non-beveled edge flush with flooring, or where no greater than 1/4" vertical rise occurs

** Designed for thermal break. Bumper seal not available




Project:
Submitted by:
Date:
Notes:

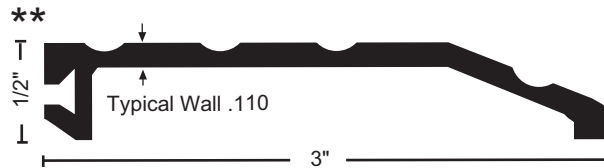


Half Saddle Thresholds and Extended Width Components


All thresholds this page

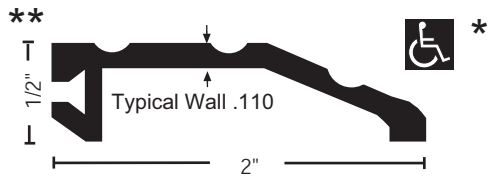


321 .34 lbs./ft.
321DKB .34 lbs./ft.

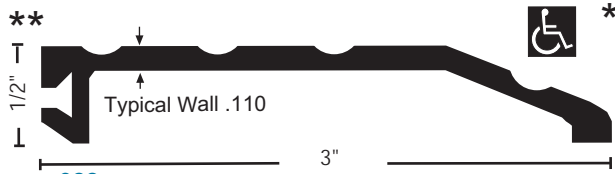

322 .48 lbs./ft.
322DKB .48 lbs./ft.

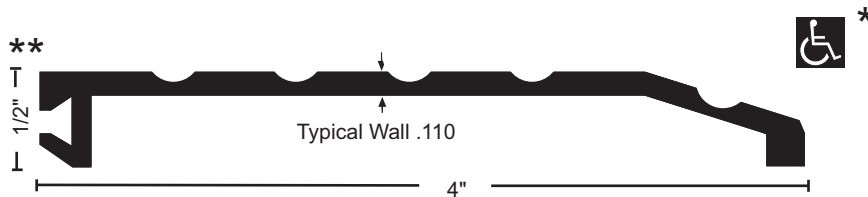


327 .60 lbs./ft.
327DKB .60 lbs./ft.

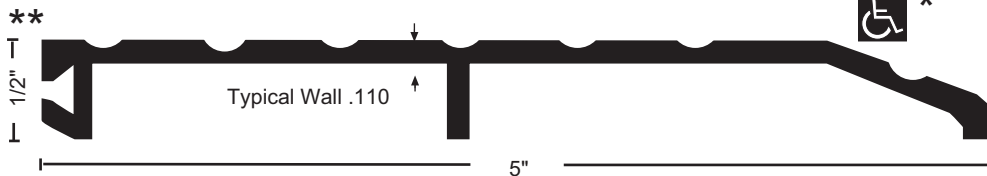

350 .83 lbs./ft.
350DKB .83 lbs./ft.



355 .79 lbs./ft.
355DKB .79 lbs./ft.

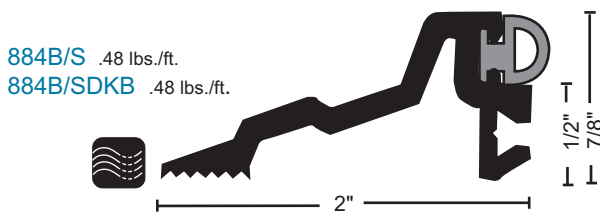

884B/S .48 lbs./ft.
884B/SDKB .48 lbs./ft.

MATERIALS & FINISHES

- Aluminum mill finish
- DKB - Aluminum dark bronze finish



- Optional: Slip Resistant SIA Finish

FASTENERS

#10 x 1-1/2" FH zinc plated wood screws furnished. Dark bronze supplied with DKB thresholds.

- * When installed with the non-beveled edge FLUSH with flooring, or where no greater than 1/4" vertical rise occurs.

- ** Designed for thermal break. Bumper seal not available.



BUMPER SEAL

Seals against the door providing weather resistance

Vinyl ("V") supplied unless other material specified

- Options:
- NGP-TPV ("N")
 - Silicone ("S")
 - Pile ("P")