



NATIONAL GUARD
PRODUCTS


Transition Strip 8132



Materials & Finishes

Aluminum alloy 6063, T5 temper
Mill finish
DKB - dark bronze finish

- 2" wide x 1/8" tall
- Smooth top
- Heavy Duty - for transition at edge of 1/8" vinyl tile
- Protects edge of tile
- Reduces tripping hazard
- Available in 96" length only
- BHMA certified to ANSI/BHMA A156.21 1,000 lb. load test
- Weight: .28 lbs./ft.
- #14 stainless steel SMS furnished


 Optional Slip Resistant
SIA Finish




Project:
Submitted by:
Date:
Notes:

Transition Strips

All Products this page



8132 .28 lbs./ft.



8130 .81 lbs./ft.



- Heavy Duty - for transition at edge of 1/8" or 3/8" tile
- Protects edge of tile
- Reduces tripping hazard
- Available in 96" length only
- #14 stainless steel SMS furnished

MATERIALS & FINISHES

- Aluminum mill finish
- DKB - Aluminum dark bronze finish




- Optional: Slip Resistant SIA Finish

FASTENERS


#10 x 1-1/2" FH zinc plated wood screws furnished. Dark bronze supplied with DKB thresholds.

Half Saddle and Extended Width Components

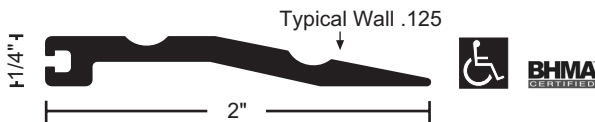


215 .28 lbs./ft.

215DKB .28 lbs./ft.




515 .45 lbs./ft.

515DKB .45 lbs./ft.

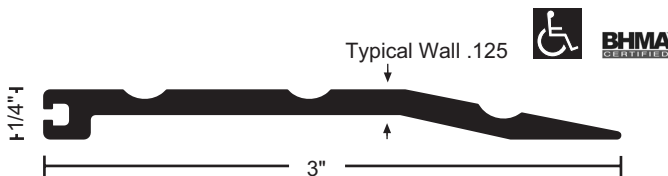


315 .41 lbs./ft.

315DKB .41 lbs./ft.




700E .20 lbs./ft.

700EDKB .20 lbs./ft.

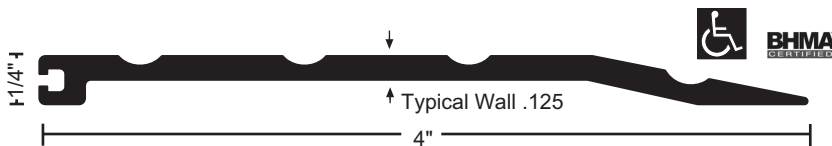

415 .55 lbs./ft.

415DKB .55 lbs./ft.

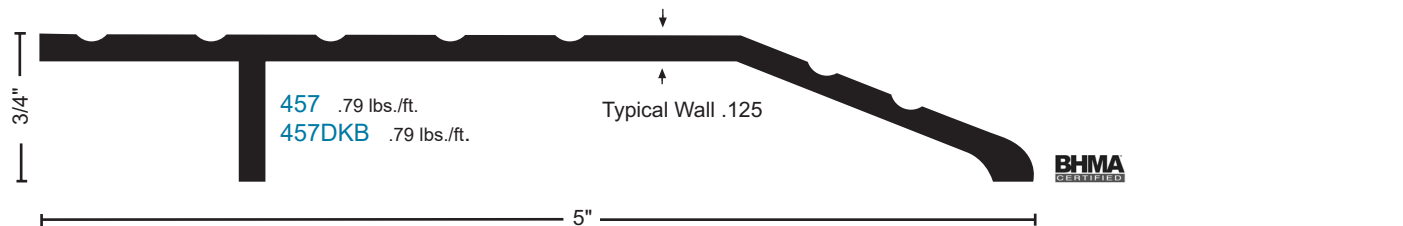

457 .79 lbs./ft.

457DKB .79 lbs./ft.



458 1.11 lbs./ft.

458DKB 1.11 lbs./ft.



Aluminum or Stainless Steel Threshold

Installation Instructions

1. Cut threshold to size required.
2. Notch around door frame if desired.
3. Attach to floor surface with fasteners provided.
4. Caulk around base of threshold for moisture control.

Instrucciones de Instalación

1. Corte el umbral a la medida.
2. Haga una muesca alrededor del marco de la puerta si así lo desea.
3. Fije a la superficie del piso con los sujetadores suministrados.
4. Calafatee alrededor de la base del umbral para controlar la humedad.



POSITIVE PRESSURE TESTED GASKETING MATERIALS
FOR FIRE DOORS
FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS
RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS
RATED UP TO 1-1/2 HOURS.
CATEGORY J

MATERIAL DE EMPAQUE PARA PUERTAS CORTAFUEGO
SOMETIDOS A PRUEBAS DE PRESION POSITIVA, PARA
USARSE EN PUERTAS METALICAS HUECAS CORTAFUEGO,
CERTIFICADAS HASTA 3 HORAS Y PUERTAS DE MADERA
CORTAFUEGO, CERTIFICADAS HASTA 1-1/2 HORAS
CATEGORÍA J