




# Mobile access steps with platform, single-sided access, with aluminium treads and platform

Can be released safely and quickly for flexibility while working: comfortable ascent, four sprung castors for stability and easy handling.

## Product description

- Quick and easy assembly thanks to the new connecting elements.
- Comfortable ascent thanks to 200 mm deep treads.
- Large platform, 600 x 800 mm.
- Mobile and quick to set up with four sprung swivel castors (two of which have brakes).
- Maximum safety through platform guardrail at a height of 1.00 m on three sides.
- Maximum load 150 kg.

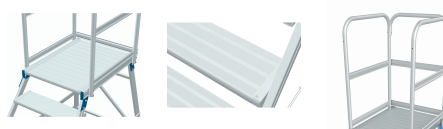

## Product features

Coating: natural  
 Connection between stiles and rungs/stiles: welded  
 Guardrail height: 1000 mm  
 Load: max. 150 kg  
 Material: aluminium  
 Platform length: 800 mm  
 Platform width: 600 mm  
 Tread depth: 200 mm  
 Type of rungs/treads: serrated  
 Vertical distance between each rung/tread: 240 mm

## Hints and special features

Optional double-sided handrail in compliance with DIN EN 131-7 on the steps.  
 Complies with EN 131-7

## Product variants

Order number	Base	Number of rungs, incl. platform	Platform height	Transport dimensions	Weight	Working height
41971	0,77 m × 1,27 m	3	0.72 m	1.180 mm × 820 mm × 330 mm	28.5 kg	2.7 m
41972	0,82 m × 1,45 m	4	0.96 m	1.350 mm × 820 mm × 400 mm	31.8 kg	2.95 m
41973	0,87 m × 1,63 m	5	1.2 m	1.380 mm × 950 mm × 420 mm	35 kg	3.2 m
41974	0,93 m × 1,81 m	6	1.44 m	1.850 mm × 1.000 mm × 330 mm	38.4 kg	3.45 m



Order number	Base	Number of rungs, incl. platform	Platform height	Transport dimensions	Weight	Working height
41975	0,98 m × 1,99 m	7	1.68 m	1.920 mm × 1.060 mm × 410 mm	41.8 kg	3.7 m
41976	1,03 m × 2,17 m	8	1.92 m	2.220 mm × 1.030 mm × 360 mm	45.6 kg	3.9 m