



Golf Cart Windshield

Installation Method for Club Car DS 1982-2000,
Club Car DS 2000-up, Yamaha G14/G16, Yamaha G22, EZGO RXV

We are striving to build a reliable brand of golf carts parts and accessories.

Hope this manual can assist you to easier install.

For more technical support, please reach us via

Website : www.10101.com


Email : sale_service@10101.com

Facebook : zhong zaiyang


Youtube : 10L0L

| Contents | Qty | Installation Tools | Qty |
|---------------------------------------|-----|--------------------------|-----|
| Polycarbonate..... | 2 | Rubber Hammer..... | 1 |
| Rubber Retaining Clips & Plastic..... | 1 | Slotted Screwdriver..... | 1 |


See Figure 1

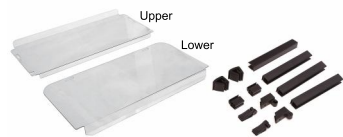


Club Car DS 2000-up

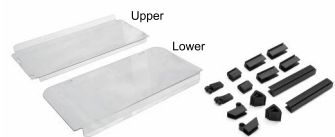


Club Car DS 1982-2000

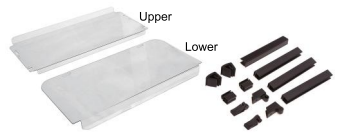

Yamaha G14/G16

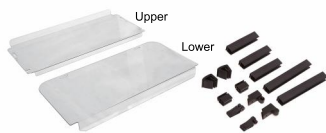


Yamaha G22

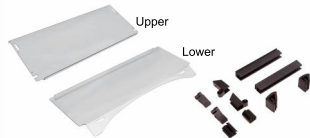

EZGO RXV

Installation Tools

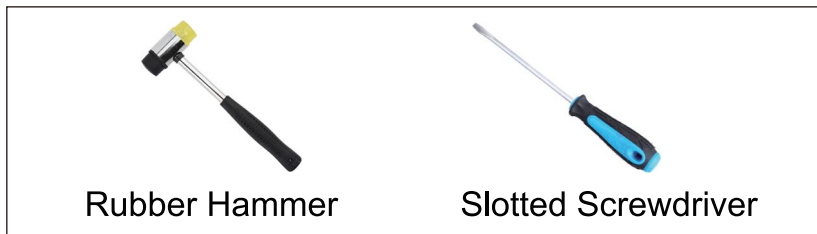

Rubber Hammer

Slotted Screwdriver

Installation Steps

1. Install the longest retaining clips to the lower iron structure.

See figure 1




2. Install both of the 2 clips.

See figure 2



3. Install the two long clips on the left and right sides.

See figure 3

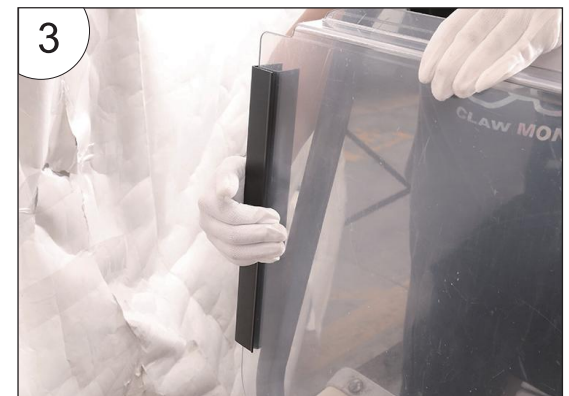

4. Use a rubber hammer to hit the part in.

See figure 4



5. Install the long clips to the iron frame at bottom sides.

See figure 5



6. The preinstalled lower windshield retaining clips.

See figure 6



7. Align the position, install the pivot joint structure.

See figure 7



8. Use a rubber hammer to hit the part in.

See figure 8



9. Installed as shown in the figure.

See figure 9




10. Structure as shown in the figure.



See figure 10

11. The preinstalled upper windshield retaining clips.

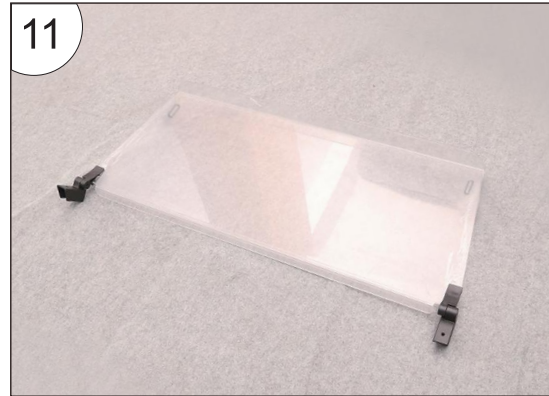


See figure 11

12. Install the preassembled upper windshield.




See figure 12

13. The whole upper windshield can be adjusted downward slightly.

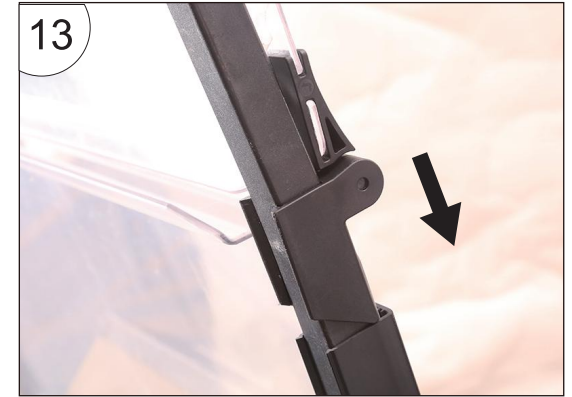

See figure 13

14. Use a slotted screwdriver to install the retaining clips on the upper windshield.

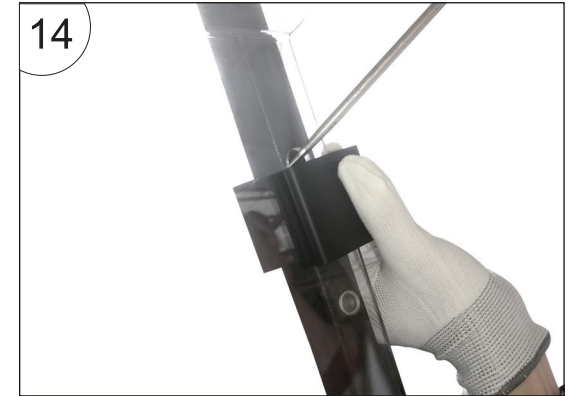

See figure 14

15. Install the adjusting clip to the upper windshield.



See figure 15

16. Use a slotted screwdriver to install the retaining clips on the lower windshield.

See figure 16



17. Remove the protector from the wind shield.

See figure 17



For Club Car DS 1982-2000

19. All steps are the same except step 3-4, Install the short clips to the left and right sides of the lower windshield.

See figure 19



20. Two short clips on each side.

See figure 20



18. Installation complete.

Foldable



21. Installation complete.

Foldable