

Golf Cart Windshield

Installation Method for Yamaha G29, EZGO TXT, Club Car Precedent

We are striving to build a reliable brand of golf carts parts and accessories.

Hope this manual can assist you to easier install.

For more technical support, please reach us via

Website : www.10101.com


Email : sale_service@10101.com

Facebook : zhong zaiyang


Youtube : 10L0L

Contents	Qty	Installation Tools	Qty
Polycarbonate.....	1	10 mm Hex Wrench.....	2
Rubber Retaining Clips & Plastic.....	1	Rubber Hammer.....	1
Screw.....	2	Slotted Screwdriver.....	1


See Figure 1

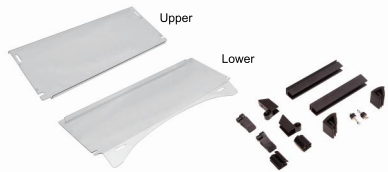

Club Car Precedent

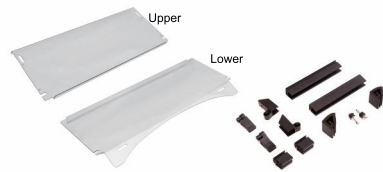

Yamaha G29

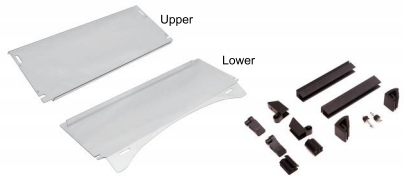

EZGO TXT

Installation Tools



1/2 inch (13mm)×2

Rubber Hammer

Slotted Screwdriver

Installation Steps

1. Install the longest retaining clips to the windshield.

See figure 1



2. Put bolts into the structure.

See figure 2



3. Tighten the bolts with two wrenches (10mm).

See figure 3



4. Lower windshield with retaining clips preinstalled.

See figure 4



5. Install the pivot joint structure.

See figure 5



6. Use a rubber hammer to hit the part in.

See figure 6



7. Install the other part.

See figure 7



8. Installed as shown in the figure.

See figure 8



9. Upper windshield with retaining clips preinstalled.

See figure 9




10. Install the preassembled upper windshield.

See figure 10



11. The whole upper windshield can be adjusted downward slightly.

See figure 11

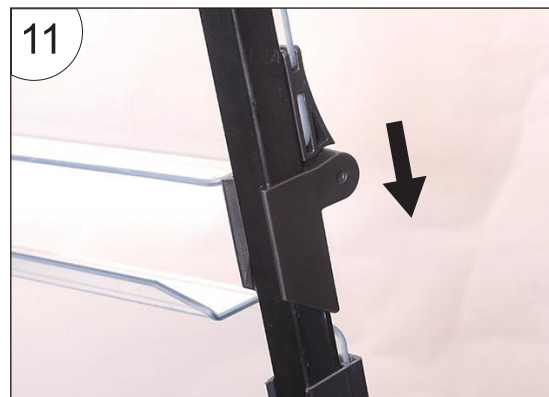


12. Use a slotted screwdriver to install the retaining clips.

See figure 12



13. Install the adjusting clip to the upper windshield.

See figure 13

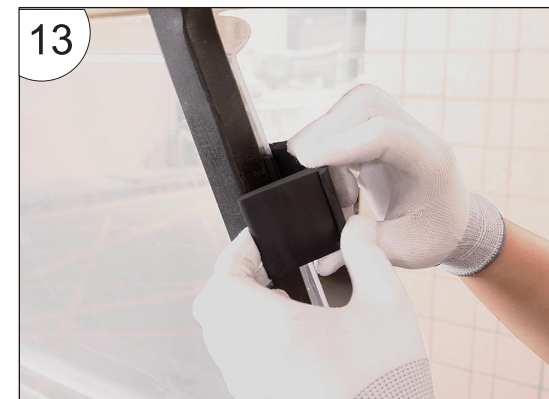

14. Use a slotted screwdriver to install the retaining clips.

See figure 14



15. Remove the film from the windshield.

See figure 15



16. Install the adjusting clip to the



International Smart Production, Global Direct Supply

⑦

16. Folded.



International Smart Production, Global Direct Supply

⑧