
FLEXIROL SLIDING

For sliding wooden or metal doors weighing up to 500kg

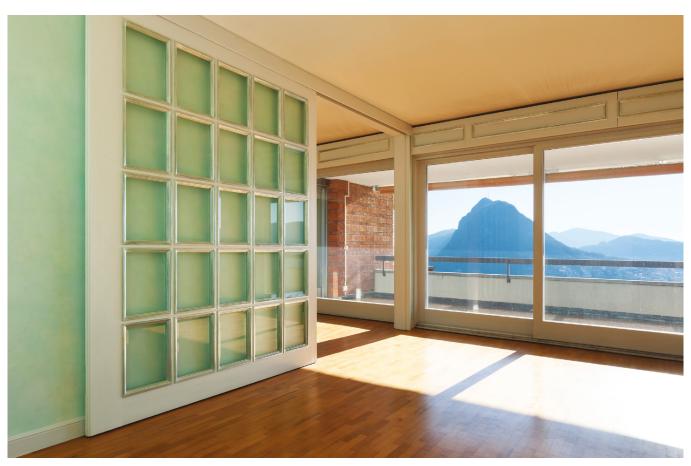



Flexirol is a unique system ideally suited to large doors which require high performance as well as an attractive finish. It's an ideal product for hotels, offices, conference centres, shop fronts and showrooms where durability and design are paramount. The product caters for wooden or metal doors fabricated from either angle frame or box section with aluminium extrusion. The track can be soffit fixed or face fixed for flexibility of installation.

Product Information				
Product	Max. Door Width	Door Thickness Range	Max. Door Weight	
Flexirol Sliding	6000mm	40 - 100mm	500kg	

Product Specification			
Component	Description	Short Code	
Track	White aluminium track in 2000, 2500, 3000, 4000, 5000 and 6000mm lengths	550/****	
	Mill finish track in 2000, 3000, 4000, 5000 and 6000mm lengths	550/****M	
Brackets Spaced every 750mm	Face fixed bracket	1A/550	
	Suspended soffit fixed ceiling bracket with vertical adjustment	3S/550	
Hangers 2 per door	Hanger for metal doors	556	
	Hanger for wooden doors with concealed fixing	556/57	
	Hanger for wooden doors with angle plate fixing	556/52	
Guides	Guide for wooden and metal doors, 1 per door (metal doors should also use 94X channel)	89/2N	
	Guide for wooden doors 2 per door	106N/94	
	Guide for metal doors 2 per door	104N/94	
Guide Channel	Brass guide channel in 1500 and 3000mm lengths	94/****	
	Aluminium guide channel in 1500, 2000, 2500, 3000, 4000 and 6000mm lengths	94X/****	
	Aluminium threshold in 2000, 2500, 3000, 3500, 4000 and 6000mm lengths	94T/***	
Stop 2 per door	Track stop	HH3/301	

^{****}Replace with length of track or rail for full short code

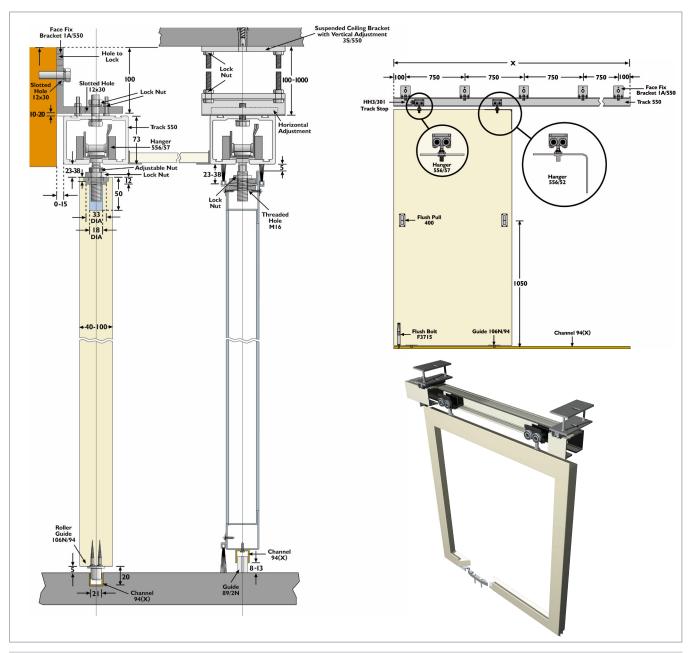

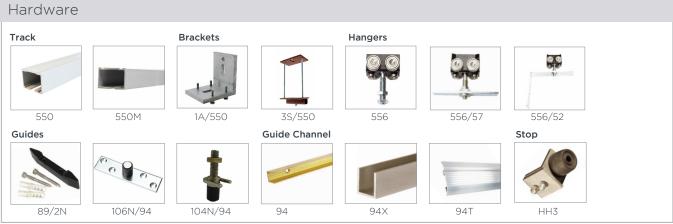



www.pchenderson.com 57