

# SPOOKY SEASON SAMPLER

## FINISHING INSTRUCTIONS

These cutting and assembly instructions are for finishing the Spooky Season Sampler - 2023.  
Quilt top will finish at 57" x 57". Some notes before getting started:

- **WOF** = Width of fabric. All pattern measurements assume fabric to be 42" wide from selvage to selvage
- **Seam Allowance** =  $\frac{1}{4}$ "
- Press all seams open unless otherwise stated.
- Check [cottonandjoy.com/pages/spooky-season-sampler](https://cottonandjoy.com/pages/spooky-season-sampler) for any pattern updates or corrections.
- Share your progress and finished block on Instagram using hashtag [#SpookySeasonSampler](https://www.instagram.com/SpookySeasonSampler)

| MATERIALS                  | REQUIREMENT           | CUTTING  |
|----------------------------|-----------------------|--|
| <b>SASHING and BORDERS</b> | 1 $\frac{1}{4}$ yards | 5 3" x WOF, subcut:<br><b>A:</b> 6 15 $\frac{1}{2}$ " x 3"<br><i>(save remnants for horizontal sashing)</i><br><b>B:</b> 6 3 $\frac{1}{2}$ " x WOF |
| <b>BINDING</b>             | $\frac{1}{2}$ yard    | 6 2 $\frac{1}{2}$ " x WOF  |
| <b>BACKING</b>             | 3 $\frac{3}{4}$ yards |  |

*Active hyperlinks* Click where you see an underline!

## SEWING INSTRUCTIONS

### QUILT TOP ASSEMBLY

1. Arrange blocks 1-9 in three rows of three. Sew rows together, adding one A strip vertically between blocks. Press seams towards sashing pieces. **Fig 1**
2. Sew remaining sashing strips together to make one long strip. Measure rows and cut horizontal sashing.
3. Pin and sew rows together, adding the sashing created in Step 2 in between rows. **Fig 2**
4. Sew the B strips together to make one long strip. Measure the height of the quilt, and cut the side borders. Sew to left and right sides. Press seams away from the quilt top. **Fig 3**
5. Repeat Step 5 with remaining border strips for the top and bottom of the quilt. **Fig 3**



FIG 1



FIG 2



FIG 3

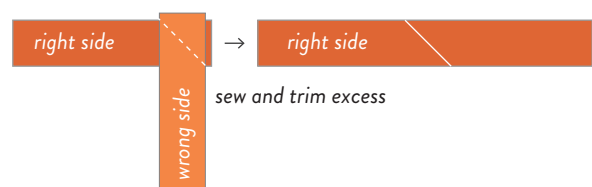


FIG 4

### FINISH QUILT

1. From backing fabric, piece a backing at least 8" larger than quilt top in both dimensions. Layer the backing wrong side up, followed by the batting and the quilt top right side up. Baste and quilt as desired.
2. Trim away extra batting and backing and square up the quilt.
3. Sew binding strips together with diagonal seams. Trim excess, leaving a 1/4" seam allowance. Press seams. **Fig 4**
4. Once all binding strips are sewn together, fold in half lengthwise, wrong sides together, and press.
5. Sew binding to the quilt, lining up the raw edges. Fold binding over and machine or hand stitch to finish.