

# **BREMA CB184A**

#### SELF-CONTAINED ICE CUBE MACHINE

Brema's flagship CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.


The Brema CB184A is a bench top ice cube machine that produces 21kg of ice per 24 hours and has storage capacity of 4kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.



### STANDARD FEATURES

- 21kg production per 24 hours
- 4kg storage capacity
- Produces crystalline 13g cubes
- Hospital grade stainless steel outer
- Fully insulated internal storage bin
- Disappearing door
- Electromechanical operation
- Stainless steel spray arm



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

### from the world of Comcater!

National Head Office 156 Swann Drive Derrimut VIC 3030 Tel: +61 3 8369 4600 Fax: +61 3 8369 4695

96-100 Tope Street

South Melbourne VIC 3205 Tel: +61 3 8369 4600 Fax: +61 3 8699 1299 Sydney

20/4 Avenue of the Americas Newington, NSW 2127 Tel: +61 2 9748 3000 Fax: +61 2 9648 4762 Brisbane

1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122 Fax: +61 7 3399 5311 Perth Unit 4/35 Westchester Road Malaga WA 6090 Tel: +61 8 9248 9290


Fax: +61 8 9248 1903

COMCATER

- foodservice equipmen

## **BREMA CB184A**



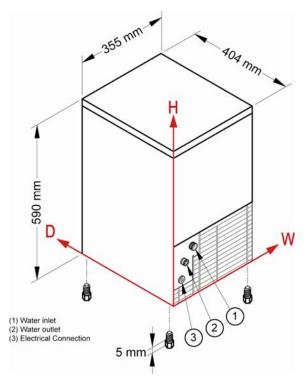

### **DIMENSIONS**

355W x 404D x 590\*H mm (\*add 5mm for foot)

### **CONNECTIONS**

3/4" Water inlet, 24mm Water outlet & Electical connection

### **TECHNICAL DATA**

Production 24h	21 kg
Storage Capacity	4 kg
Cooling System	Air
Cube	13 g
Refrigerant	R404A
Electrical Consumption	320W
Power Requirements	240V 10amp
Weight	28 kg

## STANDARD ACCESSORIES

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- 5mm plastic feet (4)

CONNECTIONS	W	Н
Water inlet	88 mm	184 mm
Water outlet	45 mm	138 mm
Electrical connection	41 mm	73 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



PROUDLY DISTRIBUTED BY:

