

BREMA TM450A

MODULAR PEBBLES ICE MACHINE

Brema's TM range of self-contained ice makers produces pebble-shaped ice particles and stores them in a separate storage bin.

The Brema TM450A is a modular pebbles ice machine that produces 440kg of pebbles ice per 24 hours and is designed to fit on top of a range of Brema storage bins with differing capacities from 100kg to 550kg.

Pebbles ice is ideal for crushing, blending and mixing into cocktails, fruit juices, smoothies and frappés. The ice has a fast and efficient refrigerating effect and is easy to handle and dose.



STANDARD FEATURES

- 440kg production per 24 hours
- Can be installed on top of storage bins with capacities between 100kg and 550kg
- Produces pebble-shaped ice
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Electromechanical operation
- Powerful gear motor and auger system

Pebbles Ice



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

from the world of Comcater!

National Head Office
156 Swann Drive
Derrimut VIC 3030
Tel: +61 3 8369 4600
Fax: +61 3 8369 4695


Melbourne
96-100 Tope Street
South Melbourne VIC 3205
Tel: +61 3 8369 4600
Fax: +61 3 8699 1299

Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000
Fax: +61 2 9648 4762

Brisbane
1/62 Borthwick Avenue
Murarrie QLD 4172
Tel: +61 7 3399 3122
Fax: +61 7 3399 5311

Perth
Unit 4/35 Westchester Road
Malaga WA 6090
Tel: +61 8 9248 9290
Fax: +61 8 9248 1903

BREMA TM450A

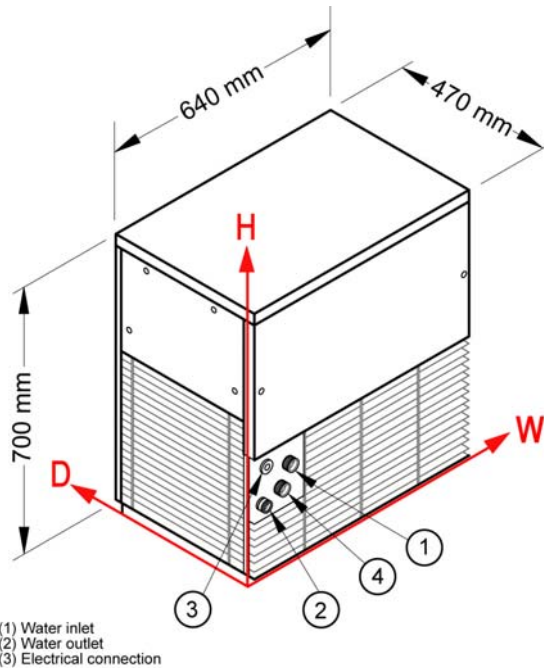

(1) Water inlet
 (2) Water outlet
 (3) Electrical connection
 *(4) Water cooled model only - available upon request

DIMENSIONS

640W x 470D x 700H mm

CONNECTIONS

3/4" Water inlet, 24mm Water outlet
 & Electrical connection

USABLE BINS

BIN200, BIN240PE, BIN350, BIN550 V DS,
 RB100, DRB100, DRB500

TECHNICAL DATA

Production 24h	440 kg
Cooling System	Air
Ice Tyoe	Pebbles
Refrigerant	R404A
Electrical Consumption	1750W
Power Requirements	240V 15amp
Weight	104 kg

STANDARD ACCESSORIES

- Water Inlet Hose
- Drainage hose
- External Water Filter
- Pressure Limiting Valve

CONNECTIONS

	W	H
Water inlet	116 mm	282 mm
Water outlet	34 mm	228 mm
Electrical connection	58 mm	292 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

PROUDLY DISTRIBUTED BY: