

# **BREMA VM350A**

#### **MODULAR ICE CUBE MACHINE**

Brema's VM range of modular ice cube heads produces pyramid-trunk shaped ice cubes weighing 7g which automatically drop into a separate Brema storage bin.


The Brema VM350A is a modular ice cube machine that produces 140kg of ice per 24 hours and is designed to fit on top of a range of Brema storage bins with differing capacities from 200kg to 240kg.

The 'fast ice' created by Brema's VM modular heads is ideal for hotels, fast food outlets, bars and clubs.



#### STANDARD FEATURES

- 140kg production per 24 hours
- Can be installed on top of storage bins with capacities between 200kg and 240kg
- Produces compact 7g cubes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Electromechanical operation
- Stainless steel spray arm
- Vertical evaporator system for fast production



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## from the world of Comcater!

National Head Office 156 Swann Drive Derrimut VIC 3030 Tel: +61 3 8369 4600 Fax: +61 3 8369 4695 Melbourne 96-100 Tope Street South Melbourne VIC 3205 Tel: +61 3 8369 4600

Fax: +61 3 8699 1299

Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000

Fax: +61 2 9648 4762

Brisbane 1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122

Fax: +61 7 3399 5311


Perth Unit 4/35 Westchester Road Malaga WA 6090 Tel: +61 8 9248 9290

Fax: +61 8 9248 1903



## **BREMA VM350A**



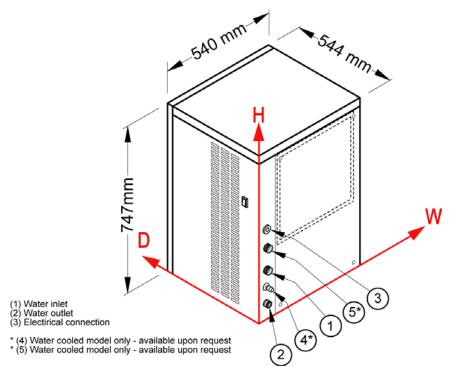

## **DIMENSIONS**

540W x 544D x 747H mm

#### **CONNECTIONS**

3/4" Water inlet, 24mm Water outlet & Electical connection

## **USABLE BINS**

BIN200, BIN240PE

## **TECHNICAL DATA**

Production 24h	140 kg
Cooling System	Air
Cube	7 g
Refrigerant	R404A
Electrical Consumption	1400W
Power Requirements	240V 15amp
Weight	85 kg

## STANDARD ACCESSORIES

- Water Inlet Hose
- Drainage hose
- External Water Filter
- Pressure Limiting Valve

CONNECTIONS	W	Н
Water inlet	35 mm	173 mm
Water outlet	32 mm	42 mm
Electrical connection	33 mm	343 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



PROUDLY DISTRIBUTED BY:

