

SLS3512PP Single Handle Lavatory Faucet Operation & Maintanence Manual

Quick Install Guide Dia Lavatory Faucet



(Y)—(S)

Model Numbers		Feature Highlights
☐ SLS3512PP	Single Handle Lavatory Faucet with Push Pop Drain Assembly	 Single hole mount configuration Quarter turn ceramic cartridge 23 inch braided hose water supply connections 7-1/8" height Standard 1.0 gpm (3.8 L/min) flow rate Faucet shall be metal construction, plated in standard polished chrome finish
Compliance		Warranty
-ASME A112.18.1/CSA B125.1 -NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 -WaterSense 1.0 gpm		Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial

installations. Refer to


www.symmons.com/warranty for complete warranty information.

Installation

Push Pop Install: Insert drain body (L) HOT⇔ COLD into drain opening. From below, Tighten Step 4 locking nut (O) with gasket (M) and Flush lines and washer (N) to flange. Tighten tail nut (Y) check for leaks with washer (X) to secure tail pipe (Q). Do Not overtighten. Step 1 Attach faucet assembly **Optional** Adjust limit stop washer to limit handle turn to the hot position if desirable Step 2 Connect supply hoses


COLD

Dimensions

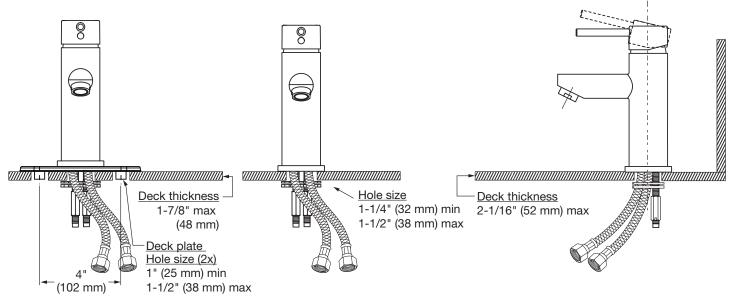

Note: Dimensions subject to change without notice.

Parts Breakdown

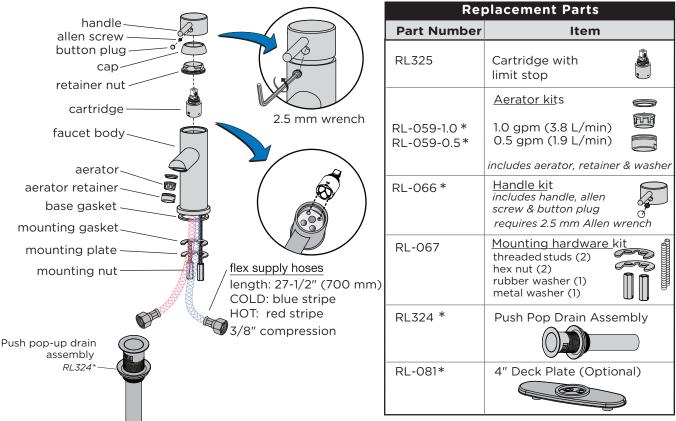

Note: For decorative finish faucets append the appropriate suffix code letters to part numbers marked with an asterisk ()



MARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.