



Thule Rapid System Kit 1663

> Instructions

RANGE ROVER Evoque, 3-dr SUV, 11-

RANGE ROVER Evoque, 5-dr SUV, 11- / *12-

*North America

		xx kg xx lbs	+		7 kg 15,4 lbs
					3 kg 6,6 lbs
=	3-dr	Max. 40 kg		Max. 88 lbs	
=	5-dr	Max. 50 kg		Max. 110 lbs	

ISO 11154-E

141663

C.20130925
519-1663-03

Bring your life
thule.com



271 x2




1186 x2




x1

323 x2





1187 x2



x1

1


	X (scale)	X (mm)	X (inch)
RANGE ROVER Evoque , 3-dr SUV, 11-	47,5	1126	44 ³ / ₈
RANGE ROVER Evoque , 5-dr SUV, 11- / *12-	47,5	1126	44 ³ / ₈

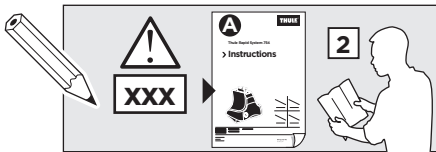


	Y (scale)	Y (mm)	Y (inch)
RANGE ROVER Evoque , 3-dr SUV, 11-	46,5	1116	43 ⁷ / ₈
RANGE ROVER Evoque , 5-dr SUV, 11- / *12-	46	1111	43 ³ / ₄

2



SRA

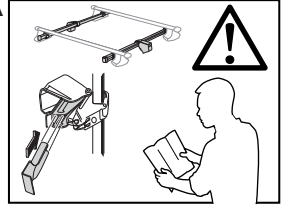


RANGE ROVER Evoque, 3-dr SUV, 11-

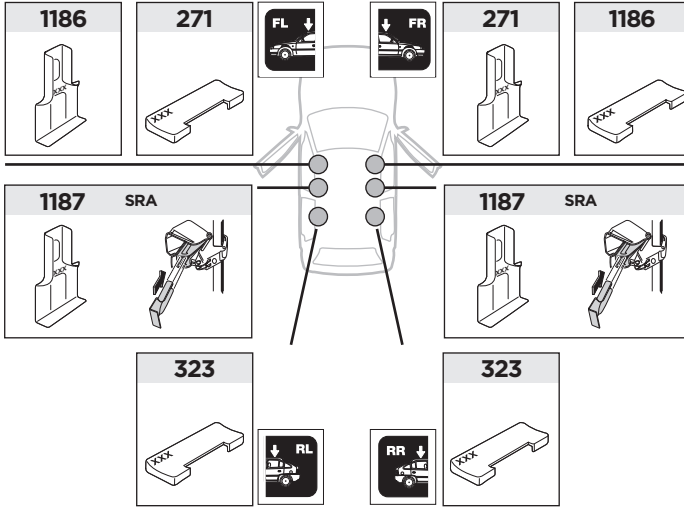


RANGE ROVER Evoque, 5-dr SUV, 11- / *12-

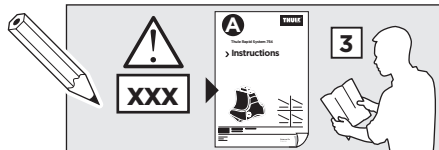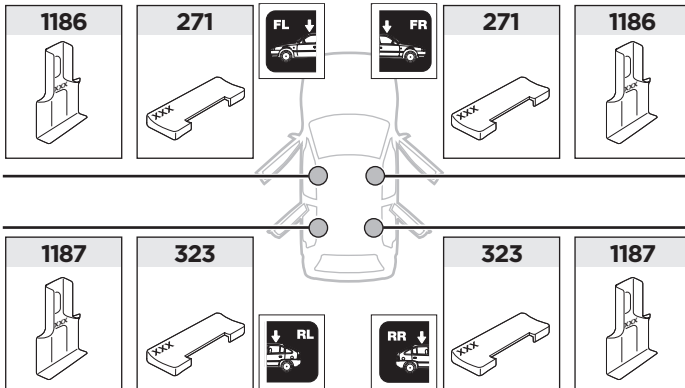

3

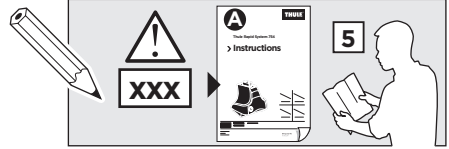

	W (mm)	Z (mm)	Y (mm)	W (inch)	Z (inch)	Y (inch)
RANGE ROVER Evoque, 3-dr SUV, 11-	270	650	340	10 5/8	25 5/8	13 3/8

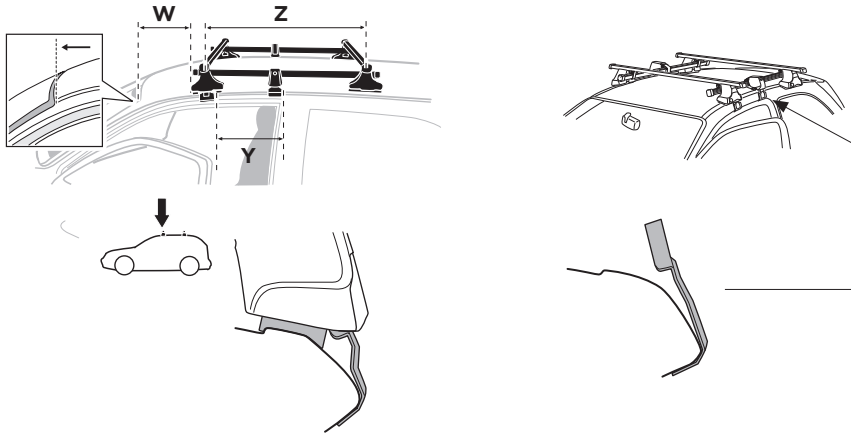

	W (mm)	Z (mm)	W (inch)	Z (inch)
RANGE ROVER Evoque, 5-dr SUV, 11- / *12-	270	700	10 5/8	27 1/2

