




# SBL200

GALLERY

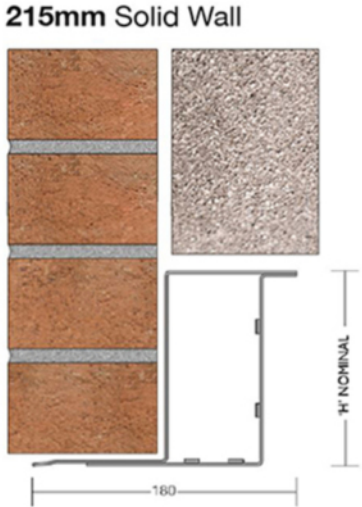

## PRODUCT INFORMATION

### SBL200

#### Medium Duty Solid Wall Lintel

Cavity: 200-215mm Inner and outer leaves must be suitably tied. **Features**

- We are the only lintel manufacturer to hot-dip galvanize after fabrication providing up to 50% more zinc protection than other approved coatings
- Supergalv coating offers a superior life expectancy
- Post-fabrication galvanizing leaves no surface with inferior paint protection

Length	750-1800	1950-270	2850-300	3150-360	3750-450
L (kN)	20	20	25	40	35
W (kg/m)	9.8	9.8	16.5	16.5	16.5
H (mm)	140	140	222	222	222

(L) Load SWL/UDL value (W) Weight (H) Height

## PRODUCT ATTRIBUTES

<b>Brand</b>	Birtley
<b>Generic Ref</b>	SBL200
<b>Product Range</b>	Solid Wall Lintels
<b>Product Type</b>	Medium Duty Solid Wall Lintel 200-215mm
<b>European Standard/ETA</b>	BS EN845-2:2013+A1:2016
<b>Test Standard</b>	EN846-9:2000/2016
<b>Notified Body</b>	Lucideon Ltd (NB 1289)
<b>Material</b>	Mild Steel S275JR to BS EN10025-2:2004
<b>Coating/Finish/Colour</b>	65µm Hot Dip Galvanized to BS EN ISO 1461:2009
<b>Thermal Performance</b>	Contact us for information
<b>Fire Rating</b>	60 mins (with 2 coat plaster finish)
<b>1. Installation requirement</b>	Bed fully on bricklaying mortar
<b>2. Installation requirement</b>	Must be used with a cavity tray - External walls only
<b>Sales Qty</b>	1
<b>Packaging weight</b>	0
<b>1. Features</b>	Supergalv coating offers superior life expectancy
<b>2. Features</b>	Post-fabrication galvanizing leaves no surface with inferior paint protection
<b>3. Features</b>	Structural grade steel to EN10025
<b>Option 1</b>	Alternative material options: Ultragalv coating (150µm), Stainless Steel 1.4301 (304)
<b>Option 2</b>	Outer Leaf Options: Render mesh (MF)