

## PRECAUTIONS

**WARNING:** Please DO NOT power cycle the VP-R49G during system boot up or firmware upgrade. You may corrupt firmware images and cause the unit to malfunction.

**WARNING:** Use only the power adapter included in the VP-R49G package. Using an alternative non-qualified power adapter may possibly damage the unit.




PACKAGE CONTENTS

1 x R49G




1 x Handset



1 x Phone Cord



1 x Quick Installation Guide



1 x Ethernet Cable



1 x Stand




1 x 12V DC Power Adapter


## OVERVIEW

VP-R49G represents the future of enterprise business telephones in modem Internet age. Featuring Android Operating System 9.0 and its vast number of 3rd party applications, a 7 inch capacitive touch screen TFT LCD with an adjustable inclination angle, 2M CMOS sensor camera, embedded antenna, dual Gigabit Ethernet ports, integrated PoE and Bluetooth, this unique product is distinguished in a special class of its own.

## **CONNECTING THE PHONE**

- 1.Connect the handset and main phone case with the phone cord;
- 2.Connect the LAN port of the phone to the RJ-45 socket of a hub/switch or a router using the Ethernet cable;
- 3.Connect the 12V DC output plug to the power jack on the phone; plug the power adapter into an electrical outlet;
- 4.The LCD will display booting up or firmware upgrading information. Before continuing, please wait for the main screen display to show up;
- 5.You can further configure network connection using either static IP, DHCP and etc from the menu of the touch screen;



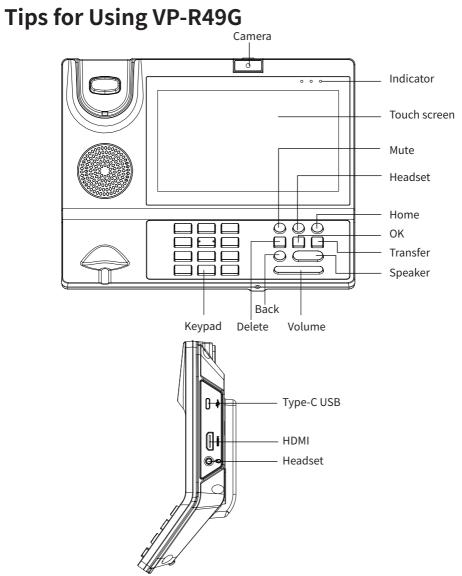

## **Experiencing VP-R49G SIP Phone**

Please visit our website: http://www.akuvox.com/en/ to receive the most up-to-date updates on firmware releases, additional features, documentation and news on new products.

Thank you again for purchasing VP-R49G SIP Phone, it will be sure to bring convenience and color to both your business and personal life.

