

# NVR-108X-P8



## Key Features


- Support Ultra 265/H.265/H.264 video formats
- 8-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA, HDMI at up 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 8MP resolution recording
- 1 SATA HDD up to 6 TB
- Support cloud upgrade

## Specifications


| Model                     | NVR-108X-P8   |
|---------------------------|---|
| <b>Video/Audio Input</b>  |   |
| IP Video Input            | 8-ch  |
| Two-way Audio Input       | 1-ch, RCA   |
| <b>Network</b>            |   |
| Incoming Bandwidth        | 80Mbps  |
| Outgoing Bandwidth        | 64Mbps  |
| Remote Users              | 128   |
| Protocols                 | TCP/IP, P2P, DHCP, UPnP, HTTP, HTTPS, DNS, DDNS, SMTP   |
| <b>Video/Audio Output</b> |   |
| HDMI/VGA Output           | HDMI:<br>3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz<br>VGA:<br>1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Recording Resolution      | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF  |
| Audio Output              | 1-ch, RCA   |
| Synchronous Playback      | 8-ch  |
| Corridor Mode Screen      | 3/4/5/7/9   |
| <b>Decoding</b>           |   |
| Decoding format           | Ultra 265/H.265/H.264   |
| Liveview/Playback         | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF  |
| Capability                | 2 x 4k@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30   |
| <b>Hard Disk</b>          |   |
| SATA                      | 1 SATA interface  |
| Capacity                  | up to 6TB for each disk   |
| <b>Smart</b>              |   |
| VCA Detection by Camera   | Intrusion detection, Cross line detection, Enter area, Leave area   |
| VCA Search                | Behavior search   |
| <b>General Alarm</b>      |   |
| General Alarm             | Motion, Human Body Detection, Video Loss, Alarm input   |
| Alert Alarm               | IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access  |
| <b>External Interface</b> |   |
| Network Interface         | 1 RJ45 10M/100M self-adaptive Ethernet Interface  |
| USB Interface             | Rear panel: 1 x USB2.0, 1 x USB3.0  |
| RS232                     | NA  |
| RS485                     | NA  |
| Alarm In                  | NA  |
| Alarm Out                 | NA  |
| <b>PoE</b>                |   |
| Interface                 | 8 RJ45 10M/100M self-adaptive Ethernet Interface  |

|                      |   |
|----------------------|---|
| Max Power            | Max 30W for single port<br>Max 75W in total                         |
| Supported Standard   | IEEE 802.3at, IEEE 802.3af  |
| <b>General</b>       |   |
| Power Supply         | 52V DC<br>Power Consumption: ≤8 W (without HDD)                     |
| Working Environment  | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing) |
| Dimensions (W×D×H)   | 260mm × 240mm × 47mm (10.2"×9.4"×1.9 ")                             |
| Weight (without HDD) | 1kg (2.20 lb)   |
| <b>Certification</b> |   |
| Certification        | CE<br>FCC<br>WEEE<br>RCM  |

## Dimensions

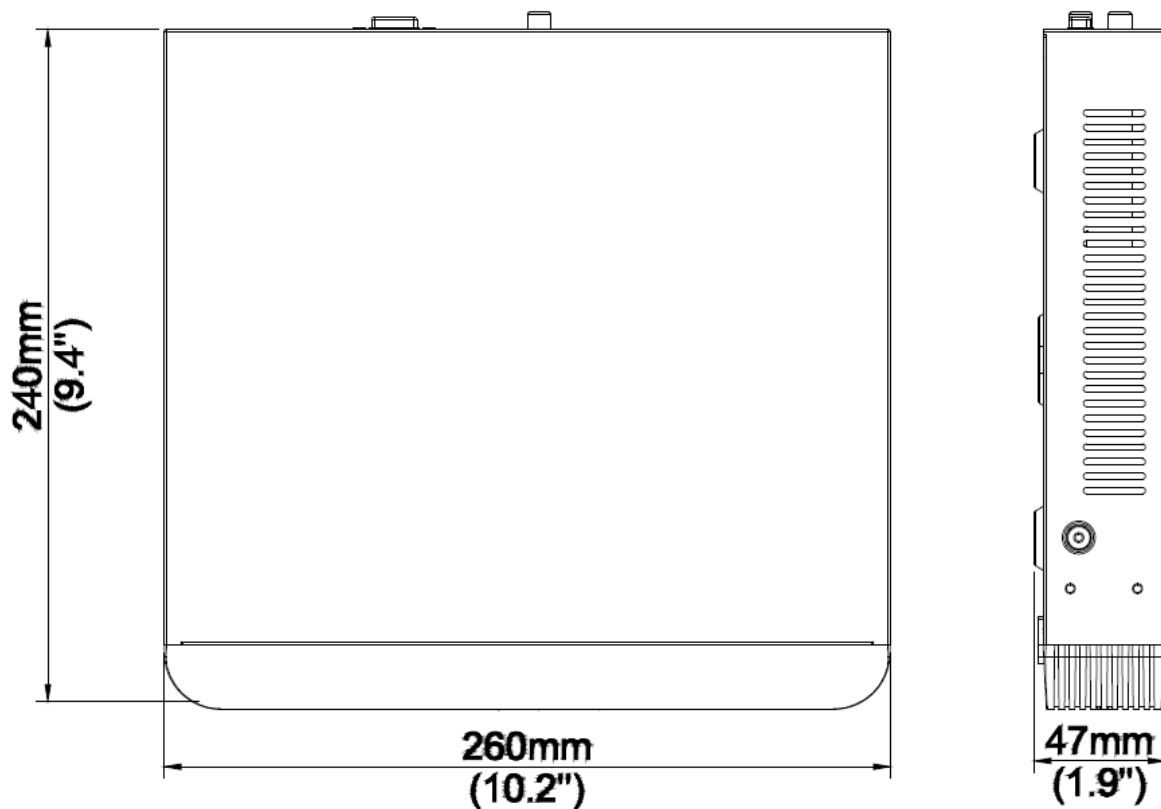

## Rear Panel

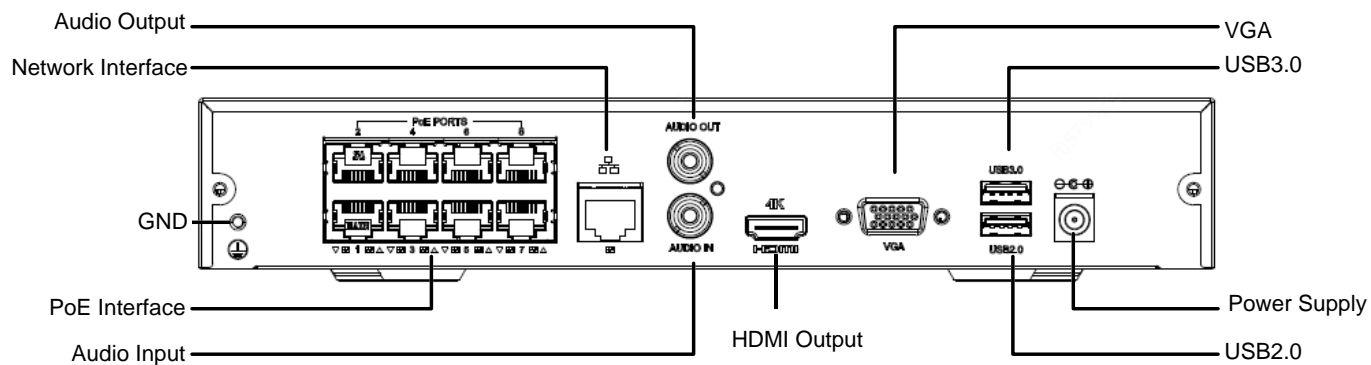

[www.uniview.com/uniarch](http://www.uniview.com/uniarch)

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.