

22 Inch Monitor

MT-22-V



Features

- True color display
- Resolution is up to at 1920*1080
- Wide view of field:178° (H)/ 178° (V)
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language
- Support speaker

Specifications

Panel	Description
Panel Type	LED Backlight
Panel Size	22


1




Resolution 1920*1080 Color Support 16.7M Brightness (cd/m²) 250 Contrast Ratio 3000:1 Refresh Rate 60Hz Response Time (ms) 7 Viewing Angle (H/V) Horizontal 178°, Vertical 178° Operation Hour 24/7 Signals Description Input 1* VGA, 1* HDMI, 1*AUDIO Output 2*Speaker, 1.5W VESA Description VESA(mm) 100*100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(mm) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C - 40 ° C </th <th>Pixel Pitch(H*V)(mm)</th> <th>0.248*0.248</th>	Pixel Pitch(H*V)(mm)	0.248*0.248
Color Support 16.7M Brightness (cd/m²) 250 Contrast Ratio 3000:1 Refresh Rate 60Hz Response Time (ms) 7 Viewing Angle (H/V) Horizontal 178°, Vertical 178° Operation Hour 24/7 Signals Description Input 1° VGA, 1° HDMI, 1°AUDIO Output 2°Speaker, 1.5W VESA Description Wall-mounted Thread 4-M4 Threaded hole OSD Description Muti-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage D C 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(mm) 491.03*387.21*190.00(With Pedestal) Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40° C Operating Humidity 20%-85% (No Condensation) Storage Temperature 10° C ~ 50° C		
Brightness (cd/m²) 250 Contrast Ratio 3000:1 Refresh Rate 60Hz Response Time (ms) 7 Viewing Angle (H/V) Horizontal 178°, Vertical 178° Operation Hour 24/7 Signals Description Input 1° VGA, 1° HDMI, 1°AUDIO Output 2°Speaker, 1.5W VESA Description VESA(mm) 100°100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) <24(on)		
Contrast Ratio 3000:1 Refresh Rate 60Hz Response Time (ms) 7 Viewing Angle (H/V) Horizontal 178°, Vertical 178° Operation Hour 24/7 Signals Description Input 1° VGA, 1° HDMI, 1°AUDIO Output 2°Speaker, 1.5W VESA Description VESA(mm) 100°100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) <24(on)		16.7M
Refresh Rate 60Hz Response Time (ms) 7 Viewing Angle (H/V) Horizontal 178°, Vertical 178° Operation Hour 24/7 Signals Description Input 1° VGA, 1° HDMI, 1°AUDIO Output 2°Speaker, 1.5W VESA Description VESA(mm) 100°100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) \$24(on) Standby power consumption (W) \$0.5(Standby) Product Dimensions (W*H*D)(m) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Brightness (cd/m²)	250
Response Time (ms) 7 Viewing Angle (HV) Horizontal 178°, Vertical 178° Operation Hour 24/7 Signals Description Input 1° VGA, 1° HDMI, 1°AUDIO Output 2°Speaker, 1.5W VESA Description VESA(mm) 100°100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(mm) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Contrast Ratio	3000:1
Viewing Angle (H/V) Horizontal 178°, Vertical 178° Operation Hour 24/7 Signals Description Input 1* VGA, 1* HDMI, 1*AUDIO Output 2*Speaker, 1.5W VESA Description VESA(mm) 100*100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(mm) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Refresh Rate	60Hz
Operation Hour 24/7 Signals Description Input 1* VGA, 1* HDMI, 1*AUDIO Output 2*Speaker, 1.5W VESA Description VESA(mm) 100*100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) <24(on)	Response Time (ms)	7
Signals Description Input 1* VGA, 1* HDMI, 1*AUDIO Output 2*Speaker, 1.5W VESA Description VESA(mm) 100*100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(m) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Viewing Angle (H/V)	Horizontal 178°, Vertical 178°
Input 1* VGA, 1* HDMI, 1*AUDIO Output 2*Speaker, 1.5W VESA Description VESA(mm) 100*100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) <0.5(Standby) Product Dimensions (W*H*D)(m) 491.03*387.21*190.00(With Pedestal) Meight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Operation Hour	24/7
Output 2*Speaker, 1.5W VESA Description VESA(mm) 100*100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(mm) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Signals	Description
VESA Description VESA(mm) 100*100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W)* <0.5(Standby)	Input	1* VGA, 1* HDMI, 1*AUDIO
VESA(mm) 100*100 Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) <0.5(Standby)	Output	2*Speaker, 1.5W
Wall-mounted Thread 4-M4 Threaded hole OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(m) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	VESA	Description
OSD Description Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(m) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	VESA(mm)	100*100
Multi-Language 8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese) General Description Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(mm) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Wall-mounted Thread	4-M4 Threaded hole
GeneralDescriptionInput VoltageDC 12V, 2ATypical power consumption (W)≪24(on)Standby power consumption (W)≪0.5(Standby)Product Dimensions (W*H*D)(mm)491.03*387.21*190.00(With Pedestal)Package Dimensions (W*H*D)(mm)566*382*116Weight(Kg)Net Weight:2.3, Gross Weight:3.4Operation Temperature0° C ~ 40 ° COperating Humidity20%~85% (No Condensation)Storage Temperature-10° C ~ 50° C	OSD	Description
Input Voltage DC 12V, 2A Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(m dy 1.03*387.21*190.00(With Pedestal)) Package Dimensions (W*H*D)(mm) See 66*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Multi-Language	8 (English, French, Spanish, German, Russian, Korean, Japanese, Simplified Chinese)
Typical power consumption (W) ≤24(on) Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(m d91.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	General	Description
Standby power consumption (W) ≤0.5(Standby) Product Dimensions (W*H*D)(mm) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40 ° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Input Voltage	DC 12V, 2A
Product Dimensions (W*H*D)(mm) 491.03*387.21*190.00(With Pedestal) Package Dimensions (W*H*D)(mm) 566*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature 0° C ~ 40° C Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Typical power consumption (W)	≤24(on)
m) Package Dimensions (W*H*D)(mm) Se6*382*116 Weight(Kg) Net Weight:2.3, Gross Weight:3.4 Operation Temperature O° C ~ 40 ° C Operating Humidity Storage Temperature -10° C ~ 50° C	Standby power consumption (W)	≤0.5(Standby)
mm)566 362 116Weight(Kg)Net Weight:2.3, Gross Weight:3.4Operation Temperature0° C ~ 40 ° COperating Humidity20%~85% (No Condensation)Storage Temperature-10° C ~ 50° C		491.03*387.21*190.00(With Pedestal)
Operation Temperature0° C ~ 40 ° COperating Humidity20%~85% (No Condensation)Storage Temperature-10° C ~ 50° C		566*382*116
Operating Humidity 20%~85% (No Condensation) Storage Temperature -10° C ~ 50° C	Weight(Kg)	Net Weight:2.3, Gross Weight:3.4
Storage Temperature -10° C ~ 50° C	Operation Temperature	0° C ~ 40 ° C
	Operating Humidity	20%~85% (No Condensation)
Storage Humidity 10%~90% (No Condensation)	Storage Temperature	-10° C ~ 50° C
•	Storage Humidity	10%~90% (No Condensation)
Standard HDMI Cable, Adapter, Pedestal, Quick Guide	Standard	HDMI Cable, Adapter, Pedestal, Quick Guide




Dimensions

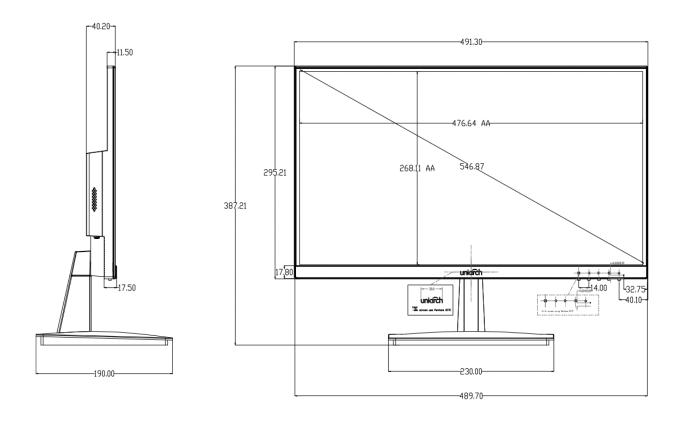

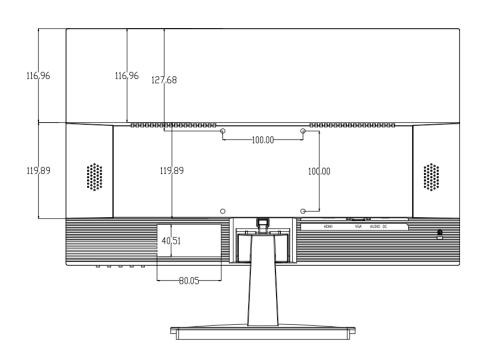



Interface



Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overse as business@uniview.com; global support@uniview.com

http://www.uniview.com

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

^{*}Product specifications and availability are subject to change without notice.

^{*}Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.