


Audio Monitoring Systems

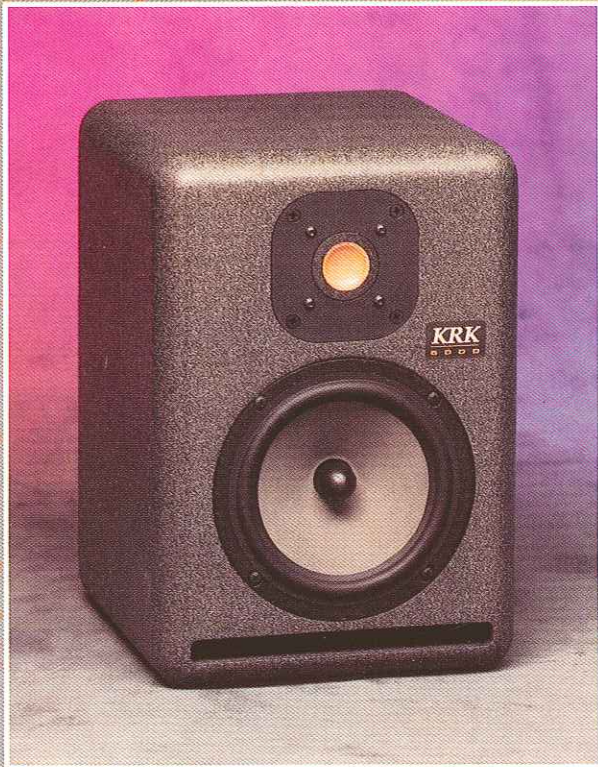

Designed for close-field monitoring applications, the diminutive KRK Model 6000 has inherited the sonic characteristics of the KRK Model 7000B, the industry standard compact monitor for top-of-console placement. The most competitively priced close-field monitor to join the renowned KRK line, the 6000s utilize the latest in aerospace materials and the highest quality components. The monitor is also available in a video shielded version, the 6000S.

The components are comprised of a 6-inch polyglass woofer and a 1-inch Kevlar inverted dome-tweeter. The system is crossed over at 2.4 kHz with a passive crossover network. The rated frequency response is 62 Hz to 20 kHz (+/- 3 dB) with a sensitivity of 89 dB (1 W @ 1 meter). The KRK 6000 can handle up to 75 continuous watts and has a maximum SPL of 106 dB, which is more than adequate in near-field applications.

Perfect for all close-field applications, the KRK 6000s deliver an extremely smooth frequency response with very low distortion. Their small size, 13" x 9" x 10", and weight of only 18 lbs. each make them extremely portable for independent engineers who like to move their own reference monitors from studio to studio.

Close-Field Monitors Model 6000/S

- Extremely smooth frequency response
- High power handling
- Compact & portable
- Low distortion

Drivers: 6" polyglass/1" kevlar

Crossover: Passive 2-way

Crossover Point: 2.4 kHz

Frequency Response: +/- 3 dB 62 Hz-20 kHz

Sensitivity: 89 dB (1 W @ 1 meter)

Max. Power Handling: 75 W


Max. SPL: 106 dB

Nominal Impedance: 8 ohms

Cabinet Dimensions: H-13", W-9", D-10"

Cabinet Finish: Custom Gray texture

Shipping Weight: 36 lbs. per pair

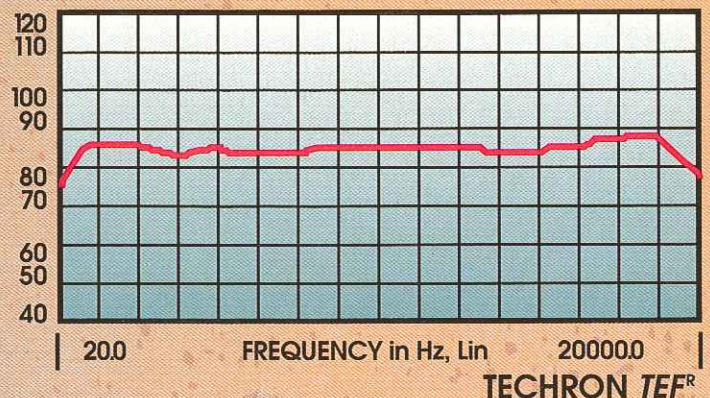

Distributed by Group One

East Coast Office:
(516) 249-1399 • FAX (516) 753-1020
West Coast Office:
(310) 306-8823 • FAX (310) 577-8407

KRK Monitoring Systems
16612 Burke Lane
Huntington Beach, CA 92647
(714) 841-1600
FAX (714) 375-6496