

Audio Monitoring Systems



Designed for close-field monitoring applications, the compact KRK Model 7000B replaces the popular KRK 7000 that has become an industry standard for top-of-console placement. The unique phase-aligned enclosure physically aligns the low frequency transducer with the tweeter, eliminating audible phasing problems or sound coloration. The monitor is also available in a video shielded version, the 7000BS.

The components are comprised of a 7-inch Kevlar woofer and a 1-inch Kevlar dome tweeter. The system is crossed over at 3 kHz with a proprietary passive crossover network. The rated frequency response is 50 Hz to 20 kHz (+/- 3 dB), with a sensitivity of 91 dB (1 watt @ 1 meter). The KRK 7000B can handle up to 150 continuous watts and has a maximum SPL of 110 dB.

Perfect for all close-field applications, the KRK 7000Bs deliver an extremely smooth frequency response with very low distortion. Their small size, 14.25" x 11" x 11" and weight of only 25 lbs. each, make them extremely portable for the independent engineer who likes to move a single pair of reference monitors from studio to studio.

Close-Field Monitors Model 7000B/BS

- Extremely smooth frequency response
- High power handling
- Phase-aligned
- Low distortion

Drivers: 7" kevlar/1" kevlar

Crossover: Passive 2-way

Crossover Point: 3 kHz

Frequency Response: +/- 3 dB 50 Hz-20 kHz

Sensitivity: 91 dB (1 W @ 1 meter)

Max. Power Handling: 150W


Max. SPL: 110 dB

Nominal Impedance: 8 ohms

Cabinet Dimensions: H-14.25", W-11", D-11"

Cabinet Finish: Custom Gray texture

Shipping Weight: 50 lbs. per pair

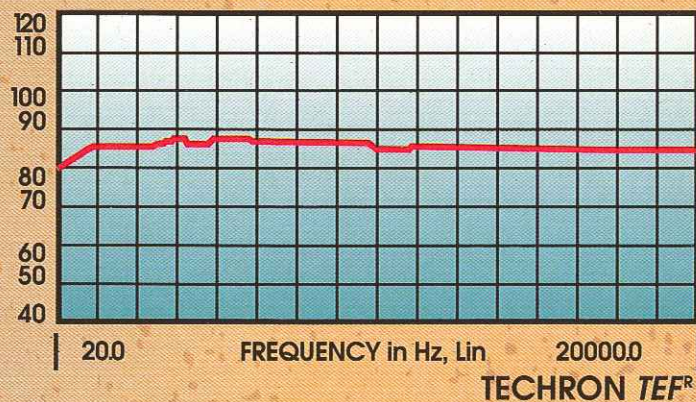

Distributed by Group One

East Coast Office:
(516) 249-1399 • FAX (516) 753-1020
West Coast Office:
(310) 306-8823 • FAX (310) 577-8407

KRK Monitoring Systems

16612 Burke Lane
Huntington Beach, CA 92647
(714) 841-1600
FAX (714) 375-6496