


E Enquiries

Shaving & Fleshing Blades

Please fill in requested measures.

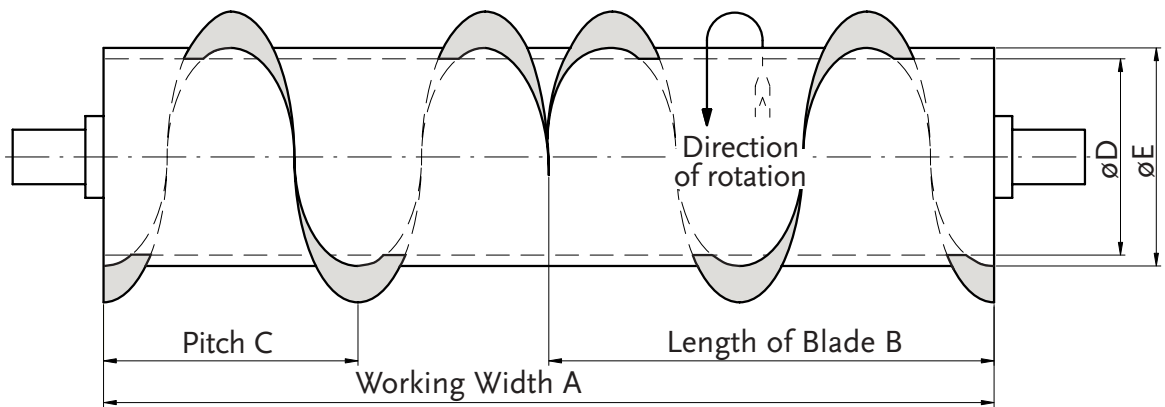


Pitch C = mm

Length of Blade B = mm

Working Width A = mm


ø at bottom of grooves D = mm

Outer ø E = mm



E Enquiries

Please complete.

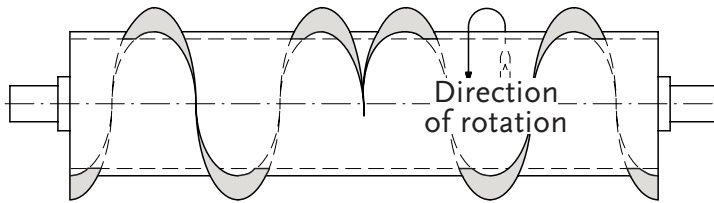

Right-hand winding
blades = left side

Left-hand winding
blades = right side

Right-hand winding blades = pcs

Left-hand winding blades = pcs

Machine maker =

Type / No. =

Choose requested blade type.

FGS Shaving blades



EGS Fleshing blades

FA Shaving blades

EA Fleshing blades

FSEN Shaving blades


ESEN Fleshing blades

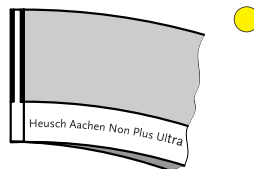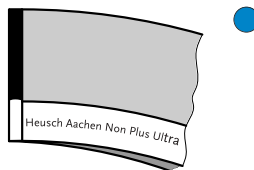

E Enquiries

Shaving & Fleshing Blades

Please fill in requested measures.

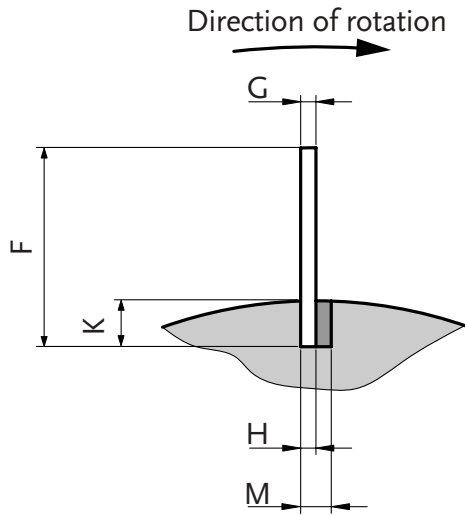

Thickness of blade at top G = mm

Height of blade F = mm

Depth of grooves K = mm

Thickness at bottom of blade H = mm

Width of grooves M = mm

Caulking copper is available in rectangular shape (rolled up) or conical shape (strips), please see "Grinding Wheels & Accessories for Leather Knives".

