

TuffLED CT

Exterior Lighting / Weatherproof



DAVIS LIGHTING

Features

- Switchable colour temperature (3000K-4000K-6500K)
- UV stabilized polycarbonate body
- UV stabilized impact resistant PC opal diffuser
- Vandal resistant
- Insect proof
- One piece moulded expanded polyurethane gasket
- Direct surface mounting
- White powdercoated metal gear tray




Applications

- Garages, carports
- Tool sheds
- Boat sheds
- Pergolas
- Salt air environment

Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

Mounting Methods



Surface mounted




Specifications


Model	TLO220CT		
Nominal Power (W)	20		
Input Voltage	220 - 240 VAC 50 / 60 Hz		
Luminous Flux (lm)	1053	1179	1119
Efficacy (lm/W)	60	69	63
CCT Switchable (K)	3000	4000	6500
CRI	> 80		
Power Factor	0.90		
Rated Life L70B50 (hr)	30,000		
Ambient Temp. t_a (°C)	35		
Weight (kg)	1.26		

Lighting Data


TLO220CT (3000K)

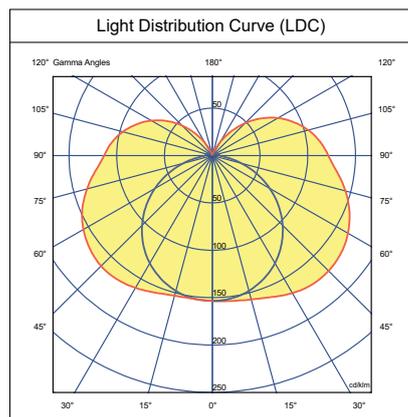

TLO220CT (4000K)

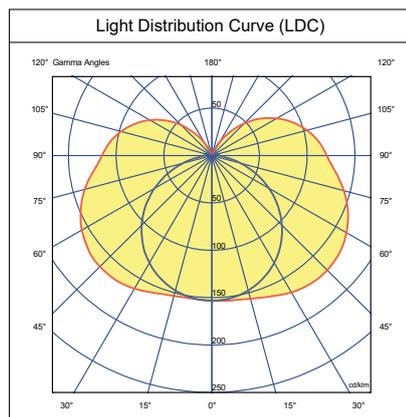

TLO220CT (6500K)

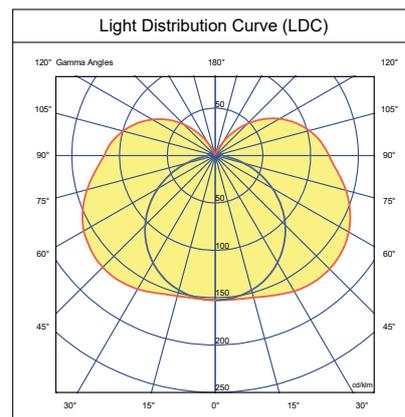

Dimensions

