

SINCE 1925




LAMINATED POLYPRO COVERALL

DESCRIPTION

Coated polypropylene has the added benefit of a solid sheet of polyethylene bonded to the surface providing protection where liquid splash is a concern. The polyethylene film is impervious and non linting with great tensile strength. Great for pesticide spraying, asbestos and mold remediation, painting, light acid splash protection and any wet general maintenance areas. Coverall with elastic wrist and ankles.

CVL-NWP-E

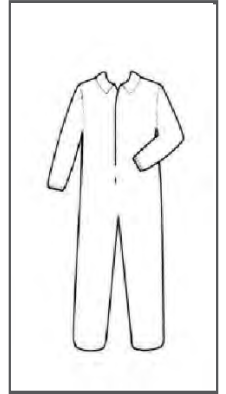

CHARACTERISTICS

- Non-woven 100% spunbound polypropylene
- Flame resistant
- Impervious to liquid and water repellent

SIZES AVAILABLE: Medium, Large, XL, 2XL, 3XL

COLORS AVAILABLE: white **PACKAGING:** 25/case

COUNTRY OF ORIGIN: China

Fabrics conforms to FDA specification

ITEM	SIZE	COUNT	WT/BOX	DIMENSION	CUBE	QUANTITY/ SKID	SKID CONFIG TIERS x ROWS
CVL-NWP-E	Med	25	7	12x11x11	.024	96	12X8
CVL-NWP-E	Lrg	25	7	12x11x11	.024	96	12X8
CVL-NWP-E	XL	25	7.2	12x11x11	.024	96	12X8
CVL-NWP-E	2XL	25	7.4	12x11x11	.024	96	12X8
CVL-NWP-E	3XL	25	7.4	12x11x11	.025	96	12X8

1591 HYLTON ROAD PENNSAUKEN, NJ 08110
 KEYSTONESAFETY.COM | INFO@KEYSTONECAP.COM

TOLL FREE (800) 663.5439
 TOLL FREE FAX (800) 663.5432
 PHONE (856) 663.5740
 FAX (856) 663.6075

SINCE 1925

