Installation Guide Paintable MDF Interior Wall Panels

Installation is easy whether you are a professional or a DIY lover. Simply follow the guide below and complete your look with your favourite paint colour.




Preparation

Tools & Surfaces

You may need the following to install your panels.

- Tape measure
- - Utility knife
- - Saw (hand saw or circular saw)
- - Straight Edge
- Cleaning solution
- - Adhesive. We suggest using a contact glue or fast curing construction adhesive. Both are readily available at hardware stores.
- Sand Paper -120 grit
- - Filler to smooth any gaps or joins in the panels

Once ready to start wipe the area clean with a cleaner to remove dirt, dust and debris. It's best to wait for it to be dry before proceeding.

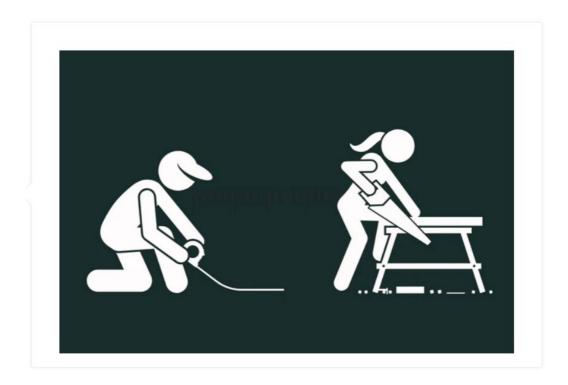

Measure twice, cut once

Measure & Cut

Measure your space and plan the placement and direction to run your panels.

Cut your panels to size. Do this on a hard surface to ensure you get a square and clean edge. This can be done with a utility knife if the edges fall in the thin portion of the panel otherwise, use a hand saw or electric saw.

Check your panel fits the space before moving to the next step.



Putting your panels on

Adhesive & Application

Apply Adhesive. We suggest using an adhesive made to hold PVC - such as Liquid Nails or PL200 - to ensure a secure attachment. Apply the adhesive at regular points on the back of the panel following a wave pattern to provide good coverage. If the wall is not smooth and flat, add more adhesive.

Apply your panel to the surface. Put pressure on the panel to ensure the glue spreads uniformly. Hold the panel for a few minutes to allow the glue to grip.



...And Voila!

Wait. Patch. Paint.

Wait for the adhesive to cure. Apply pressure on the panel.

Patch any holes with gap filler for a smooth finish.

Paint. We suggest waiting 24 hours before painting to ensure the adhesive has cured. The panel is already primed but may need a light sand to remove any grit or filler from the surface. Our panels are suitable for all paints however we suggest only applying paint to the panel after it has been fixed to its final position to avoid the paint cracking.