

PRODUCT SPECIFICATIONS

Adjustable Rotating SRD Anchor

7395A

Features

- Rotating SRD Cradle
- Adjustment pads and knobs
- Secondary connection D-ring
- Carry handle slots
- Includes fasteners - 10pcs 1/4" x 2-1/2" lag screws and 20pcs 1/4"-14 x 2-1/2" sheet metal screws

Material Specifications

Base Plate:	<i>Zinc Plated Carbon Steel</i>
SRD Cradle:	<i>Powder Coated Carbon Steel</i>

Performance Specifications

Tensile Strength:	<i>Min. 3,600 lbs tensile strength</i>
Max. Capacity:	<i>425 lbs.*</i> <i>*limited to PFAS used in conjunction with SRD Anchor</i>

Compatible SRDs


<i>DuraTech™ Cable* 15' - 75':</i>	<i>7226, 7227, 7229, 7232, 7267, 7268, 7265, 726575</i>
<i>Contractor Cable 20' - 50':</i>	<i>727620, 727630, 727650 w/ Carabiner</i>

Relevant Standards

OSHA:	<i>CFR1926.502, CFR1910.66</i>
--------------	--------------------------------

Warnings

- Read, understand and follow all labels and instructions prior to use.
- Inspect before each use.
- Remove from service if there is evidence of damage or excessive wear.
- Remove from service if there is any signs of activation.

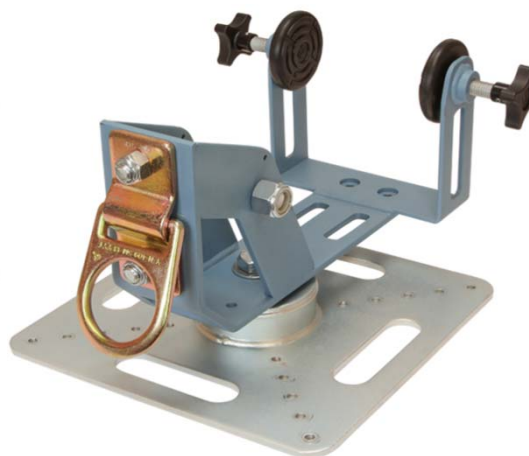

FallTech 1306 S. Alameda St. Compton, CA 90221 Tele: 323-752-0066 www.falltech.com

WARNING: THIS SPECIFICATION SHEET PROVIDES AN OVERVIEW OF PRODUCTS AVAILABLE FROM FALLTECH. CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE INFORMATION. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. FALLTECH RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THESE PRODUCTS BE THOROUGHLY READ UNDERSTOOD PRIOR TO USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.