

ELECTRICAL UTILITIES

LEADING THE WAY IN FALL PROTECTION FOR ELECTRICAL UTILITIES



THE ULTIMATE IN FALL PROTECTION PRODUCT CATALOG



OSHA'S NEW REGULATIONS MEAN MORE WORKERS AT HEIGHT WILL BE SAFE

Capital Safety has been manufacturing the highest quality fall protection equipment for more than 70 years. With more patents, more engineers and more industry innovations than any other fall-protection manufacturer, it's no wonder that Capital Safety's equipment is the most recognized and trusted around the globe. Capital Safety is the world's leader in fall protection because we are dedicated entirely to fall protection.

In spring 2014, OSHA published new, updated rules and regulations (OSHA 1910.269) for electrical power generation, transmission and distribution. These new rules—which OSHA estimates will prevent an additional 118 workplace injuries and 20 fatalities or more annually—cover both construction and general industry situations. The compliance deadline for most of the rules and regulations specific to fall protection is April 1, 2015.


UTILITIES



WHEN YOUR LIFE IS ON THE LINE, YOU DESERVE THE BEST

- Capital Safety's flagship **DBI-SALA®** has been **the premier brand in fall protection and rescue products** for more than 40 years
- Legendary for its comfort, ease of use, durability and reliability, **our line of products is 20,000 strong—and growing**
- Our **products are rigorously tested** to meet or exceed applicable standards around the globe
- Our **ISO 9001-2008 certification** drives superior engineering, quality manufacturing and unparalleled customer service
- **Accredited lab testing** means our products will perform like no other
- We offer a full range of fall protection and industrial rescue **training courses**
- Every DBI-SALA product carries a **100% satisfaction guarantee** and a **lifetime warranty for manufacturer's defects**
- Products meet the latest **OSHA 1910.269** standard for added peace of mind

Capital Safety's combination of excellent design, rugged quality and expert knowledge will protect you—and your employees—the way you deserve

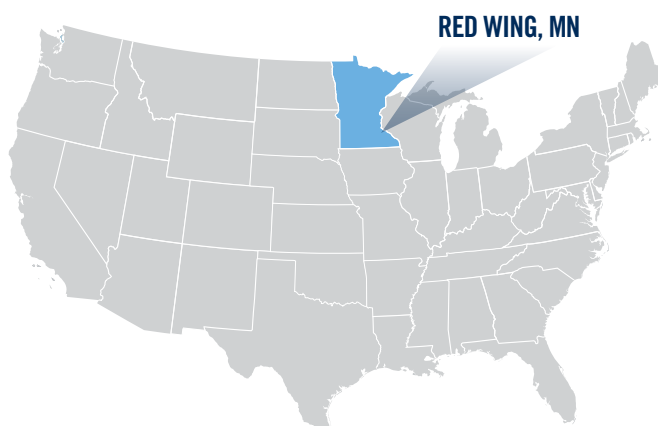

Scan here for product information



www.facebook.com/capitalsafety



[@Capital_Safety](https://twitter.com/Capital_Safety)

CYNCHLOK™

Cynch-Lok is the benchmark for all wood pole fall-restricting devices and remains the **number one choice** for working linemen. The innovative and versatile design allows linemen to **move faster, easier and safer** than ever before.

Cynch-Lok features and benefits:

- Pinch-free ergonomic design for ease of use
- Effortless one-handed adjustment
- One-piece construction—no nuts or bolts that can get loose
- Enjoy speed, flexibility and reliability
- Field versatility with rope and web options
- Meets CSA Z259.14 type A and AB, ASTM F887 type A and AB
- Left hand opening replacement carabiner to reconfigure the cynch-lok for left hand users



1204057
CYNCH-LOK ROPE FOR DISTRIBUTION POLES

POLE SIZE (DIA/CIRC):
MIN. 5.5"/17.5" (.1 M/5 M)
MAX. 18.5"/58" (.5 M/1.5 M)

1204058
CYNCH-LOK ROPE FOR TRANSMISSION POLES

POLE SIZE (DIA/CIRC):
MIN. 5.5"/17.5" (.1 M/5 M)
MAX. 30.5"/96" (.8 M/2.4 M)



1200115
CYNCH-LOK REPLACEMENT
INTERIOR ROPE LANYARD
KERNMANTLE ROPE, ABRASION RESISTANT
SLEEVE, FIELD REPLACEABLE



1200110
CYNCH-LOK REPLACEMENT STRAP
FOR DISTRIBUTION POLES
POLE SIZE (DIA/CIRC):
MIN. 5.5"/17.5" (.1 M/5 M)
MAX. 18.5"/58" (.5 M/1.5 M)
DURABLE STRAP WITH WEAR INDICATOR,
FIELD REPLACEABLE



1204075
CYNCH-LOK WEB FOR DISTRIBUTION POLES

POLE SIZE (DIA/CIRC):
MIN. 5.5"/17.5" (.1 M/5 M)
MAX. 18.5"/58" (.5 M/1.5 M)

1204076
CYNCH-LOK WEB FOR TRANSMISSION POLES

POLE SIZE (DIA/CIRC):
MIN. 5.5"/17.5" (.1 M/5 M)
MAX. 30.5"/96" (.8 M/2.4 M)



1200136
CYNCH-LOK REPLACEMENT
INTERIOR WEB LANYARD
DURABLE POLYESTER WEB, SAFLOK™
CARABINERS, FIELD REPLACEABLE



1200111
CYNCH-LOK REPLACEMENT STRAP
FOR TRANSMISSION POLES
POLE SIZE (DIA/CIRC):
MIN. 5.5"/17.5" (.1 M/5 M)
MAX. 30.5"/96" (.8 M/2.4 M)
DURABLE STRAP WITH WEAR INDICATOR



Scan here to view
a demonstration
of Cynch-Lok!



1204074

1204077

1204074
CYNCH-LOK REPLACEMENT LEFT-HANDED
SPIKED CARABINER FOR ROPE

11/16" GATE (17.5 MM), CAPTIVE EYE

1204077
CYNCH-LOK REPLACEMENT LEFT-HANDED
SPIKED CARABINER FOR WEB

11/16" GATE (17.5 MM)



1234070
ADJUSTABLE ROPE
POSITIONING LANYARD
WITH ROPE ADJUSTER X 8' (2.4 M) AND
STEEL CARABINER AND SNAP HOOK



1234083
POLE CLIMBER'S ADJUSTABLE ROPE
POSITIONING LANYARD FOR ELECTRICAL/
HOT WORK USE
8' ADJUSTABLE ROPE POSITIONING LANYARD
WITH TECHNORA KERNMANTLE ROPE,
ALUMINUM CARABINER AT ONE END, ROPE
ADJUSTER AND ALUMINUM CARABINER AT
OTHER END.



9509844
HANDLINE KEEPER
FOR LINEMAN BELT
HANDLINE KEEPER, POLYPROPYLENE, WITH
SLOT TO ATTACH TO LINEMAN BELT



1234071
ADJUSTABLE ROPE
POSITIONING LANYARD
WITH 8' ROPE ADJUSTER AND ALUMINUM
CARABINER AND SNAP HOOK



1234080
ADJUSTABLE ROPE
POSITIONING LANYARD
WITH BLUE ALUMINUM CARABINERS, ONE
WITH CAPTIVE EYE 8' (2.4 M) LENGTH

1234082 6' (1.8 M) LENGTH



1201377
ADJUSTABLE WEB POSITIONING LANYARD
WITH SPEED ADJUSTER
8' (2.4 M) WITH SNAP HOOK AT ONE
END, WEB SPEED ADJUSTER AND STEEL
CARABINER AT OTHER END



1234030
ADJUSTABLE WEB
POSITIONING LANYARD
WITH 6' ROPE ADJUSTER

EASY TO SET UP AND OPERATE

The Saflok Pole Anchor System provides utility pole climbers with 100% fall protection. This unique system allows workers to free climb poles and work around obstructions such as multiple conductors, equipment, vines and other natural obstructions. It allows workers to quickly and safely climb the pole prior to connecting their work positioning system. This system can also make rescuing a fallen worker fast and easy. The installation tool included in the Saflok Pole Anchor System connects to most hot stick poles already available on utility trucks.

SAFLOK

Extensive field testing by linemen, facility and construction workers has **successfully proven** both the ease of use and fall protection capabilities of the Saflok Pole Anchor System.

Saflok features and benefits:

- Free climb poles while maintaining 100% fall protection
- Installs anchor and lifeline to top of pole from the ground
- Allows user to easily work around obstructions
- Compatible with most hot stick poles (not provided)
- Anchor tube with installation/removal tool
- Dialectric 80 ft. (24.4 m) 5/8" (16 mm) lifeline
- Mobile rope grab with EZ-Stop™ shock absorbing lanyard
- Chain tensioner keeps lifeline taut and facilitates rescue
- Weatherproof carrying bag
- Meets applicable OSHA, ANSI and CSA standards



2104801
SAFLOK POLE CLIMBING FALL ARREST SYSTEM
SAFLOK WOOD POLE REMOTE ANCHOR SYSTEM WITH
80 FT. (24.4 M) DIALECTRIC ROPE LIFELINE, ANCHOR TUBE,
INSTALLATION/REMOVAL TOOL, ROPE GRAB WITH SHOCK
ABSORBING LANYARD AND CARRYING BAG



SEAT-BELT

GET COMFORTABLE WITH A QUALITY PRODUCT YOU CAN TRUST

When working at height, safety is the number one priority – often at the expense of comfort. Our newly designed DBI-SALA® SEAT-BELT is made with 100% top grain leather from Red Wing, MN. The SEAT-BELT provides linemen with the ultimate in comfort, durability and function.

SEAT-BELT - 4D BELT DESIGNED BY LINEMEN FOR LINEMEN

This innovative, ergonomically designed belt, provides the maximum in comfort, freedom of movement and ease-of-use.

SEAT-BELT features and benefits:

- Patent pending design redirects forces to the top of the belt for improved safety
- Small D-rings designed for Cynch-Lok™ fall restrict device
- Patent pending design distributes weight throughout the contoured, reinforced seat for improved work comfort
- Meets ASTM & OSHA regulations

SIZE	PART #
D20	1001394
D21	1001395
D22	1001396
D23	1001397
D24	1001398
D25	1001399
D26	1001400
D27	1001401
D28	1001402
D29	1001403

SIDE VIEW




1001398 4D LINEMAN BELT
AVAILABLE SIZE D18 THROUGH D30

SIZING CHART

"D" Size (See Figure 5)		Belt Sizing (See Figure 5)					
		Minimum		Center Hole		Maximum	
in.	cm	in.	cm	in.	cm	in.	cm
D18	46	32	81	36	91	40	102
D19	48	33	84	37	94	41	104
D20	51	34	86	38	97	42	107
D21	53	36	91	40	102	44	112
D22	56	37	94	41	104	45	114
D23	58	38	97	42	107	46	117
D24	61	40	102	44	112	48	122
D25	64	41	104	45	114	49	124
D26	66	42	107	46	117	50	127
D27	69	44	112	48	122	52	132
D28	71	45	114	49	124	53	135
D29	74	46	117	50	127	54	137
D30	76	47	119	51	130	55	140

FIGURE 5 - BELT SIZING

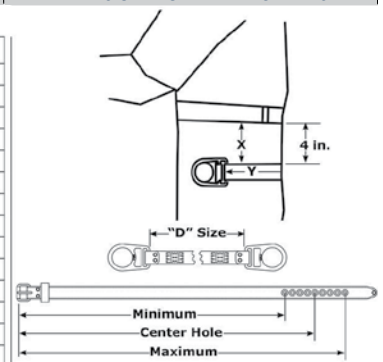

Where to measure to determine correct "D" size for a Lineman's Belt:

X = Distance from waist or top of hip bone to where Lineman's Belt is worn.

Y = Measurement is from front of hip bone around the back to the front of the other hip bone. This measurement is the "D" size.

EXOFIT NEX™

EXOFIT NEX LINEMAN SUSPENSION HARNESS WITH SEAT-BELT

ExoFit NEX harnesses are the most advanced harnesses in the industry. They're the culmination of our experience with ExoFit and ExoFit XP, ongoing research and the incorporation of new materials and innovative features. True to our NEX mission, we manufacture these harnesses using materials that won't add unnecessary weight for ultimate comfort. When speed and efficiency are project requirements, ExoFit NEX will provide the freedom and confidence to function at your maximum potential. Finally, ExoFit NEX harnesses are designed using materials that last. Get into the best, the ultimate comfort, function and durability harness, ExoFit NEX.

ExoFit NEX features and benefits:

- Hybrid shoulder and leg comfort padding
- Stand-up Tech-Lite™ aluminum back D-ring
- Tech-Lite aluminum front and suspension D-rings
- Duo-Lok™ quick connect leg and torso straps
- Nylon webbing
- Built-in lanyard keepers
- Impact Indicator
- Protected labels, equipped with i-Safe™
- Tongue buckle style lineman body belt with built-in seat
- 2 large S-shaped full-floating D-rings at hips and 2 small D-rings for fall restrict device
- Belt made with 100% top grain leather from Red Wing, MN
- Meets applicable OSHA and ANSI standards, CSA models available



*Belt sizing chart can be found on p.7

EXOFIT NEX LINEMAN SUSPENSION HARNESS WITH 4D SEAT-BELT					
HARNESS SIZE	SM	D20 1113645	D21 1113647	D22 1113648	D23 1113649
	MED	D22 1113652	D23 1113653	D24 1113654	D25 1113655
	LG	D24 1113659	D25 1113660	D26 1113661	D27 1113662
	XL	D25 1113664	D26 1113665	D27 1113666	D28 1113667
					D29 1113668





1113318 SIZE XL
EXOFIT NEX ARC FLASH HARNESS
WITH NOMEX®/KEVLAR® FIBER
WEB, CONSTRUCTION STYLE,
PVC-COATED ALUMINUM BACK
D-RING, LOCKING QUICK CONNECT
BUCKLES, SEWN-IN HIP PAD AND
BELT, COMFORT PADDING
1113315 SMALL
1113316 MEDIUM
1113317 LARGE



1103088 SIZE XL
EXOFIT NEX ARC FLASH HARNESS
WITH NOMEX®/KEVLAR® FIBER
WEB, PVC-COATED ALUMINUM BACK
D-RING, LOCKING QUICK CONNECT
BUCKLES, COMFORT PADDING
1103085 SMALL
1103086 MEDIUM
1103087 LARGE



1110882 SIZE XL
EXOFIT XP ARC FLASH HARNESS
CONSTRUCTION STYLE, NOMEX/KEVLAR
FIBER, WEB AND PADS, BACK WEB LOOP,
QUICK CONNECT BUCKLES AND KEVLAR
FIBER PASS-THRU BODY BELT
1110883 SMALL
1110880 MEDIUM
1110881 LARGE



1113369 SIZE XL
1113369 EXOFIT NEX ARC FLASH TOWER
CLIMBING HARNESS
ARC FLASH RATED, FLAME RESISTANT
WEBBING, FLAME RESISTANT TRAUMA
STRAPS, PVC COATED TECH LITE
ALUMINUM D-RINGS, STAND-UP DORSAL
D-RING, DUO-LOK QUICK CONNECT BUCKLES
1113357 SMALL
1113358 MEDIUM
1113368 LARGE



1050017 SIZE D24
LINEMAN POLE CLIMBING KIT
LINEMAN POLE CLIMBING KIT INCLUDES 1001398
SEAT-BELT 4D, 1204075 CYNCH-LOK™ POLE CLIMBING
DEVICE - WEB, 1234071 8FT. (2.4M) ADJUSTABLE ROPE
POSITIONING LANYARD AND 9511049 BACKPACK



1050028 SIZE D24
LINEMAN POLE CLIMBING KIT
LINEMAN POLE CLIMBING KIT INCLUDES 1001398V
SEAT-BELT 4D, 1204075 CYNCH-LOK™ POLE CLIMBING
DEVICE - ROPE, 1234071 8FT. (2.4M) ADJUSTABLE ROPE
POSITIONING LANYARD AND 9511049 BACKPACK

2D LINEMAN BELT

This innovative, ergonomically designed belt provides the maximum in comfort, freedom of movement and ease-of-use.

2D Lineman belt features and benefits:

- S-shaped large full floating D-rings, for hassle-free connection
- Grommet tongue buckle belt provides easy adjustments and improved durability
- Rolled edge adds durability and comfort at the hips



1001385
2D LINEMAN BELT
AVAILABLE SIZE D18
THROUGH D30

2D LINEMAN BELT

D20 1001381	D21 1001382	D22 1001383	D23 1001384	D24 1001385
D25 1001386	D26 1001387	D27 1001388	D28 1001389	D29 1001390

EXOFIT NEX LINEMAN VEST STYLE HARNESS WITH 2D BELT

HARNESS SIZE	SM	D19 1113510	D20 1113511	D21 1113512	D22 1113513	D23 1113514
	MED	D22 1113517	D23 1113518	D24 1113519	D25 1113520	D26 1113521
	LG	D24 1113524	D25 1113525	D26 1113526	D27 1113527	D28 1113528
	XL	D25 1113529	D26 1113530	D27 1113531	D28 1113532	

EXOFIT NEX LINEMAN ARC FLASH HARNESS WITH 2D BELT

HARNESS SIZE	SM	D20 1113675	D21 1113676	D22 1113677	D23 1113678	D24 1113679
	MED	D22 1113681	D23 1113682	D24 1113683	D25 1113684	D26 1113685
	LG	D23 1113686	D24 1113687	D25 1113688	D26 1113689	D27 1113690
	XL	D25 1113691	D26 1113692	D27 1113693	D28 1113694	

EXOFIT NEX LINEMAN SUSPENSION HARNESS WITH 2D BELT

HARNESS SIZE	SM	D19 1113558	D20 1113559	D21 1113560	D22 1113561	D23 1113562
	MED	D22 1113565	D23 1113566	D24 1113567	D25 1113568	D26 1113569
	LG	D24 1113572	D25 1113573	D26 1113574	D27 1113575	D28 1113576
	XL	D25 1113577	D26 1113578	D27 1113579	D28 1113580	D29 1113581

EXOFIT NEX LINEMAN VEST STYLE HARNESS WITH FRONT D-RING AND 2D BELT

HARNESS SIZE	SM	D19 1113593	D20 1113594	D21 1113595	D22 1113596	D23 1113597
	MED	D22 1113600	D23 1113601	D24 1113602	D25 1113603	D26 1113604
	LG	D24 1113607	D25 1113608	D26 1113609	D27 1113610	D28 1113611
	XL	D25 1113612	D26 1113613	D27 1113614	D28 1113615	D29 1113616

*Belt sizing chart can be found on p.7





EXOFIT NEX™

EXOFIT NEX HARNESS WITH 2D BELT

The ExoFit NEX is in a class of it's own, providing freedom and the confidence you need to function at maximum potential. The ExoFit NEX Lineman Harness, with 100% top grain leather from Red Wing, MN is the ultimate in comfort, function and durability.

ExoFit NEX features and benefits:

- Duo-Lok™ quick connect buckles
- 2 front D-rings for ladder climbing, rescue or suspension work
- Light-weight leg and back padding with ultra-soft edging
- 420 lbs (190 kg) capacity
- Revolver™ vertical torso adjusters make adjustments quick and easy, while controlling the webbing
- 2D lineman belt is adjustable for a personal fit
- Meets applicable OSHA and ANSI standards, CSA models available



FRONT VIEW



BACK VIEW

1113573
EXOFIT SUSPENSION
LINEMAN HARNESS WITH
2D BELT
DUO-LOK QUICK
CONNECT BUCKLES,
TECH-LITE™ ALUMINUM
FRONT AND BACK D-RINGS

*Belt sizing chart can be found on p.7



1113608
EXOFIT NEX VEST-STYLE
LINEMAN HARNESS WITH
2D BELT
DUO-LOK QUICK
CONNECT BUCKLES,
TECH-LITE ALUMINUM
FRONT AND BACK D-RING

*Belt sizing chart can be found on p.7

WE GO TO GREAT HEIGHTS WITH YOU

When it comes to climbing steel structures, DBI-SALA® is the best in the business. Our equipment is built for maximum reliability and ease of use. From the strongest rebar hooks to the smallest shock pack, we have the equipment you want.

EZ-STOP™ LANYARDS

EZ-Stop shock absorbing lanyards combine a set of “industry-first” advancements, with popular features making them the workhorse of the industry. Today’s EZ-Stop represents the culmination of decades of design, research, manufacturing know-how and on-the-job performance.



1246193
EZ-STOP ELASTIC WEB LANYARD
100% TIE-OFF ALUMINUM SNAP HOOK AT ONE END,
ALUMINUM REBAR (2.5" (64 MM) GATE OPENING)
AT LEG ENDS X 6' (1.8 M)

1246306
EZ-STOP ARC FLASH SHOCK
ABSORBING LANYARD
6' (1.8 M) WEB SINGLE-LEG WITH NOMEX®/KEVLAR®
FIBER WEB AND SHOCK PACK, SNAP HOOKS AT EACH
END ASTM F887



1246317
EZ-STOP FORCE2 ARC FLASH ADJUSTABLE SHOCK
ABSORBING LANYARD
6' (1.8 M) ADJUSTABLE WEB SINGLE-LEG FORCE2
WITH NOMEX®/KEVLAR® FIBER WEB AND SHOCK
PACK, SNAP HOOKS AT EACH END ARC FLASH
ASTM F887

1244610
SHOCKWAVE2 ARC FLASH SHOCK ABSORBING
LANYARD
6' (1.8M) SINGLE-LEG WITH ELASTIC NOMEX®/
KEVLAR® FIBER WEBBING AND SNAP HOOKS AT
EACH END. ASTM F887





1246305
EZ-STOP ARC FLASH WEB LANYARD
6' (1.8M) SINGLE LEG WITH NOMEX®/KEVLAR® FIBER WEB & SHOCK PACK CHOKER & SNAP HOOK AT LEG END. ASTM F887



1246309
EZ-STOP ARC FLASH WEB LANYARD
6' (1.8M) SINGLE LEG WITH NOMEX®/KEVLAR® FIBER WEB & SHOCK PACK, TIE BACK FLOATING D-RING, SNAP HOOKS AT EACH END. ASTM F887



1246323
EZ-STOP ARC FLASH WEB LANYARD
100% TIE-OFF ALUMINUM SNAP HOOK AT ONE END, ALUMINUM REBAR (2.5" (64 MM) GATE OPENING) AT LEG ENDS X 6' (1.8 M) NOMEX®/KEVLAR® FIBER ON WEB & SHOCK PACK ASTM F887



1244633
SHOCKWAVE2 ARC FLASH
100% TIE-OFF SNAP HOOK AT ONE END, STEEL REBAR (2.5" (64 MM) GATE OPENING) AT LEG ENDS X 6' (1.8 M) NOMEX®/KEVLAR® FIBER, ELASTIC LEGS. ASTM F887



1244614
SHOCKWAVE2 ARC FLASH
6' (1.8M) SINGLE LEG WITH NOMEX®/KEVLAR® FIBER WEB, CHOKER ON ONE & ALUMINUM REBAR HOOK ON LEG END. ASTM F887



1246304
EZ-STOP ARC FLASH WEB LANYARD
4' (1.2M) SINGLE LEG WITH NOMEX®/KEVLAR® FIBER WEB & SHOCK PACK, SNAP HOOKS AT EACH END. ASTM F887



NANO-LOK
SELF RETRACTING LIFELINE



WE'VE GOT YOUR BACK

Fall protection in bucket trucks poses unique challenges. Tight spaces and lack of mobility can make it difficult and inconvenient for the worker. Our specialized harnesses and lanyards provide a secure connection,

full range of motion in limited spaces and the ultimate in arc flash protection to meet or exceed OSHA, ANSI and CSA requirements.

NANO-LOK ARC FLASH BUCKET TRUCK SRL

Made specifically for the electrical utility industry.

COMPACT—The smallest and lightest arc flash SRL on the market

VERSATILE—Unrivalled jobsite flexibility

- 18 standard Nano-Lok configurations to meet virtually any arc flash or hot-work need
- Two unique web leg configurations specifically designed for bucket truck and aerial lift applications
- Industry leading 420-lb. (190 kg) user capacity
- **SAFE**—The Nano-Lok Arc Flash SRL has been tested to ASTM F887 standards
- Electric arc performance of 40 cal/cm²
- Replaces lanyards and improves worker safety
- Stops falls within inches and reduces fall distances



3101574
NANO-LOK ARC FLASH
WITH WEB LEG WITH ALUMINUM
SNAP HOOK—WEB LOOP
ON HARNESS END



3101575
NANO-LOK ARC FLASH
WITH WEB LEG AND ALUMINUM
SNAP HOOK—ALUMINUM
CARABINER ON HARNESS END



3101526
NANO-LOK ARC FLASH
WITH SINGLE-LEG CONNECTOR
AND SNAP HOOK





EXOFIT NEX™



1103088 SIZE XL
EXOFIT NEX ARC FLASH HARNESS
WITH NOMEX®/KEVLAR® FIBER
WEB, PVC-COATED ALUMINUM BACK
D-RING, LOCKING QUICK CONNECT
BUCKLES, COMFORT PADDING
.....
1103085 SMALL
1103086 MEDIUM
1103087 LARGE

EXOFIT™ XP



1110892 SIZE XL
EXOFIT XP ARC FLASH HARNESS
WITH NOMEX®/KEVLAR FIBER,
PVC-COATED HARDWARE,
PASS-THRU BUCKLES, BACK AND
LEG NOMEX®/KEVLAR FIBER PADS
.....
1110893 SMALL
1110890 MEDIUM
1110891 LARGE



1110882 SIZE XL
EXOFIT XP ARC FLASH HARNESS
CONSTRUCTION STYLE, NOMEX/
KEVLAR FIBER, WEB AND PADS,
BACK WEB LOOP, QUICK CONNECT
BUCKLES AND KEVLAR FIBER
PASS-THRU BODY BELT
.....
1110883 SMALL
1110880 MEDIUM
1110881 LARGE



1110752 SIZE XL
DELTA ARC FLASH HARNESS
WITH 7,000-LB. (3175 KG)
NYLON WEB, NO METAL ABOVE
WAIST, FRONT AND BACK WEB
LOOP, PASS-THRU BUCKLE LEGS,
LEATHER INSULATORS
.....
1110754 SMALL
1110750 MEDIUM
1110751 LARGE



1110812 SIZE XL
DELTA ARC FLASH HARNESS
WITH NOMEX®/KEVLAR FIBER WEB,
NO METAL ABOVE WAIST, FRONT AND
BACK WEB LOOP, QUICK CONNECT
BUCKLE LEGS, LEATHER INSULATORS
.....
1110815 SMALL
1110810 MEDIUM
1110811 LARGE



11150058 SIZE XL
DELTA ARC FLASH KIT
WITH 1110751 DELTA ARC FLASH
NYLON HARNESS WITH WEB LOOP
& 1240861 ARC FLASH SHOCK
ABSORBING LANYARD 6' (1.8 M)
WITH BAG
.....
1150913 MEDIUM
1150054 LARGE
1150918 XX-LARGE

DuPont™, Kevlar® fiber, and Nomex® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.



ULTRA-LOK™



3103175
ULTRA-LOK SELF RETRACTING LIFELINE
11' (3.3M) OF 1" (2.5CM) NOMEX/KEVLAR FIBER
WEBBING WITH SWIVEL SNAP HOOK

NANO-LOK™



3101574
NANO-LOK ARC FLASH SELF RETRACTING LIFELINE
WITH ANCHOR HOOK
8' (2.4M) OF 3/4" (19MM) KEVLAR® FIBER
WEBBING AND WEB LOOP, SWIVELING ANCHOR
LOOP WITH 13" (33MM) WEB EXTENSION WITH
ALUMINUM SNAP HOOK

ULTRA-LOK™



3103275
ULTRA-LOK SELF RETRACTING LIFELINE
20' (6.1M) OF 1" (2.5CM) NOMEX/KEVLAR FIBER
WEBBING WITH SWIVEL SNAP HOOK

NANO-LOK™



3101536
NANO-LOK ARC FLASH TWIN-LEG QUICK CONNECT
SELF RETRACTING LIFELINE - WEB
8' (2.4M) TWIN-LEG LIFELINES WITH 3/4" (19MM)
KEVLAR WEB AND STEEL REBAR HOOKS, QUICK
CONNECTOR FOR HARNESS MOUNTING





- Quick-connect anchorage connector.
- Swiveling anchorage loop.
- Impact-resistant housing.
- Automatic quick-activating fall arrestor.
- 8' (2.4 m) length – 33% more.
- Arc flash industry logo to easily identify the product.
- Arc flash compliant (40 cal/cm²).
- Ideal for bucket truck and aerial lift use.
- Impact indicator.
- Equipped with i-safe™
- NEW!**
- With Nomex®/Kevlar® fiber web lifeline with reinforced edges.
- 420 lb. (190 kg) weight capacity.
- 3,600 lb. (16 kN) gate hook.

MODEL SHOWN | 3101526

	LIFELINE HOOK TYPE									ANCHORAGE TYPE				U.S. PART NUMBER	CANADA PART NUMBER
	Steel Snap Hook	Steel Swiveling Snap Hook	Steel Rebar Hook	Steel Rebar Lock Hook	Aluminum Carabiner (captive eye)	Aluminum Rebar Hook	Aluminum Rebar Lock Hook	Dielectric Web Loop	11' (3.4m) Tie-Back	Single Leg Interface	Twin Leg Interface	Steel Carabiner	Web leg with aluminum snap hook		
8' Single	■									■				3101526	3101541
		■								■				3101527	3101542
			■							■				3101528	3101543
				■						■				3101529	3101544
					■					■				3101530	3101545
						■				■				3101531	3101546
							■			■				3101532	3101547
	■											■		3101533	3101548
									■	■				3101562	3101566
									■					3101563	3101567
8' 100% Tie-Off	■										■			3101534	3101549
		■									■			3101535	3101550
			■								■			3101536	3101551
				■							■			3101537	3101552
					■						■			3101538	3101553
						■					■			3101539	3101554
							■				■			3101540	3101555
								■			■			3101565	3101569
					■							■		3101574	3101578
													■	3101575	3101579
Bucket Truck								■							

WE HAVE A SOLUTION FOR ANY SITUATION

Providing fall protection in substations requires the use of a wide variety of equipment. Transformers, breakers, switchgear and confined spaces are a challenge. Locating suitable anchor points, appropriate fall clearance distances and minimum approach distances all pose threats to worker safety. Our solutions are developed to allow you and your team to anchor and maneuver safely wherever you go.

ADVANCED PORTABLE FALL ARREST SYSTEM



8516691

ADVANCED PORTABLE FALL ARREST SYSTEM (PFAS)

- THREE INDEPENDENT SWIVELING TIE-OFF POINTS
- 360 DEGREES OF PROTECTION FOR THREE WORKERS
- TELESCOPIC DESIGN; 32.75" (83.2 CM) TO 46" (116.8 CM) TO 57.25" (145.4 CM)
- LIGHTWEIGHT AND DURABLE ALUMINUM CONSTRUCTION
- LEVELING SCREWS PLUMB SYSTEM ON INCLINES UP TO 15 DEGREES
- BUILT-IN ANCHOR RING FOR HORIZONTAL LIFELINE ATTACHMENT
- PORTABLE AND FIXED BASES PROVIDE COMPLETE JOBSITE VERSATILITY



8516693

RESCUE DAVIT ARM FOR ADVANCED PORTABLE FALL ARREST POST

THE OPTIONAL RESCUE DAVIT ARM ASSEMBLES EASILY TO THE PORTABLE FALL ARREST POST, PROVIDING SIMPLE AND EFFICIENT RESCUE AND MATERIAL-HANDLING CAPABILITIES. IT'S MADE WITH LIGHTWEIGHT ALUMINUM MATERIALS FOR EASY TRANSPORTATION AND SETUP

*8516691 post not included—order separately





8516996

14' UNI-ANCHOR FALL ARREST POST

MOUNTS USING UNI-ANCHOR PLATES AND EXTENDS UP TO 14' (4.2 M) TO PROVIDE A ONE-MAN-RATED FALL-ARREST ANCHOR POINT



7600502

20' SAYFLINE SYNTHETIC HORIZONTAL LIFELINE SYSTEM


- COMPLETE SYSTEM IN BAG FOR INSTALL WITH NO SPECIAL TOOLS OR EQUIPMENT
- PORTABLE FOR RE-USE
- TWO TIE-OFF ADAPTORS INCLUDED TO ANCHOR SYSTEM TO STRUCTURE
- CAPACITY OF TWO WORKERS
- 20' TO 100' LENGTHS AVAILABLE (6.1 M TO 30.5 M)

ACCESSORIES



8517422

SAND-BLASTED STEEL UNI-ANCHOR WITH TIE-OFF ANCHOR



8516997

UNI-ANCHOR I-BEAM

BASE PORTABLE ANCHOR CLAMPS TO I-BEAMS, 56 LBS. (25.5 KG)

FLEXIGUARD SOLUTIONS

Flexiguard is designed to meet the requirements of your specific application while ensuring maximum safety and peace of mind.



HITCH MOUNT ANCHOR SYSTEM

The Hitch Mounted Anchor System is a portable system originally designed to access and maintain equipment. The unique design of this system allows it to attach to a class four hitch for transport on a truck or service vehicle. Assembled in less than 20 minutes, this system provides anchorage points up to 22 feet (6.7 m) tall. It is rated for a maximum of two users and is ANSI and OSHA compliant.

Features and Benefits:


- Hitch mounted system for maximum portability
- Self-standing basket design for easy hookup to truck and convenient storage
- System assembles quickly and raises with included winch
- System includes heavy-duty stabilizing jacks
- Width 6 ft. (1.8 m)
- Anchor Height 22 ft. (6.7 m)
- 2 users

8530313
HITCH MOUNT ANCHOR SYSTEM
ANCHOR HEIGHT 22 FT. (6.7 M)
WIDTH 6 FT. (1.8 M), UP TO 2 USERS





HITCH MOUNTED SYSTEM FOR
MAXIMUM PORTABILITY

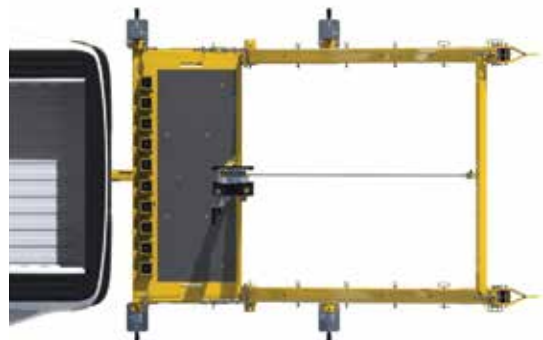

SAFLOK

The unique Saflok Steel Structure Fall Arrest System provides workers with 100% fall protection when connecting to beams, angle iron, bar joists, lattice steel and other structures in traditional power plants, substations, switch yards, manufacturing facilities or construction sites.

2104810
SAFLOK STEEL STRUCTURE FALL ARREST SYSTEM

9502776
CARRY BAG

2100420
HIGH DIELECTRIC ROPE

2100425
ANCHOR TUBE

2100418
RESCUE LOOP
SLING

5002055
ROPE GRAB WITH INTEGRATED
SHOCK-ABSORBING LANYARD

2000112
CARABINER

2100419
INSTALLATION/REMOVAL TOOL

LAD-SAF STEEL POLE LADDER SAFETY SYSTEM


6100035
BOTTOM BRACKET

6100136
CABLE GUIDE

Angle-iron clamp-on and steel pole weld-on systems also available. Call Capital Safety today.



LAD-SAF™ WOOD POLE (BOLT-ON) LADDER SAFETY SYSTEM

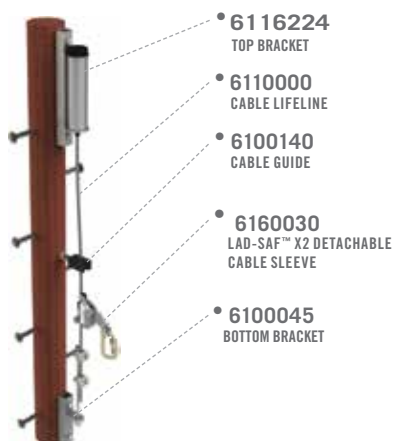



BUILT IN ANTI-PANIC GRIP

- Anti-panic grip function engages to arrest a fall even if the user grasps the rope grab in a way that interferes with the primary brake
- Patented inertia cam engages the device from the action of a fall regardless of operation mode

OPERATION SWITCH

- Easily switch from automatic to manual and back with a push of a button, even while wearing gloves

SWIVEL COVER

- Easy attachment and detachment to lifeline without disconnecting from the user

MODEL SHOWN | 8700572



TRIPLE ACTION CARABINER

- Lightweight, triple action carabiner
- 3,600 lb. (16 kN) gate strength

SHOCK PACK

- 310 lb. (141 kg) capacity
- Integrated shock pack limits arresting forces 1,348 lbs. (6 kN)

INTEGRAL SWIVEL

- Allows the device to travel freely on the lifeline regardless of the harness "D" ring orientation

SHOCK ABSORBING LANYARD

- 1 ft (.3 m) lanyard
- 2 ft (.6 m) lanyard
- 3 ft (.9 m) lanyard

8700572 3FT.
ROPE SAFE™ ROPE GRAB
SHOCK ABSORBING LANYARD AND
ALUMINUM TRIPLE ACTION CAPTIVE
EYE CARABINER
8700570 1FT.
8700571 2FT.

ROPES



PART #	DESCRIPTION
8705115	ROPE LIFELINE FINISHED BOTH ENDS WITH A THIMBLE 7/16" (11 MM) STATIC KERNMANTLE, POLY/NYLON 50' (15 M)
8705116	ROPE LIFELINE FINISHED BOTH ENDS WITH A THIMBLE 7/16" (11 MM) STATIC KERNMANTLE, POLY/NYLON 100' (30 M)
8705117	ROPE LIFELINE FINISHED BOTH ENDS WITH A THIMBLE 7/16" (11 MM) STATIC KERNMANTLE, POLY/NYLON 200' (60 M)

DBI-SALA® ADVANCED™ CONFINED SPACE

Entering and exiting confined spaces can happen in a variety of circumstances and pose a myriad of challenges: restricted movement, limited space and general physical challenges. That's why our hoist and winch equipment provide the most lightweight and efficient rescue and retrieval with the greatest reliability. We believe our products are the strongest, lightest and most versatile in the industry.



8518000
ADVANCED FIVE-PIECE HOIST SYSTEM
DAVIT ARM AND BASE SYSTEM INCLUDES 11.5"
TO 27.5" (29.2 CM TO 69.8 CM) ADJUSTABLE
OFFSET UPPER MAST 8518001, 33" (83.8 CM)
LIGHTWEIGHT LOWER MAST 8518002 AND
THREE-PIECE LIGHTWEIGHT BASE 8518005.
INCLUDES WINCH-MOUNTING BRACKET

Order winch and SRL separately.



8530352
ADVANCED 4-IN-1 DAVIT GUARD SYSTEM
PORTABLE FALL ARREST, CONFINED SPACE
ENTRY AND RESCUE SYSTEM WITH DAVIT AND
GUARDRAIL. SYSTEM INCLUDES A COLLAPSIBLE
BASE TO REDUCE STORAGE AND TRANSPORT
SPACE. A STANDARD TIE-OFF POINT PROVIDES A
CONVENIENT 5000 LB. (22KN) ANCHORE POINT
FOR FALL ARREST DEVICES WHERE REQUIRED.
INCLUDES WINCH-MOUNTING BRACKET

Order winch and SRL separately.



SALALIFT II

The Salalift II is manually operated for easy operation. Simply rotate the handle to raise or lower personnel or materials. Gear ratio is 6:1 with an average lifting speed of 3.8 m/min. No power source is required. The quick Mount System incorporates a quick-mount bracket which mates with a bracket on all DBI-SALA® support structures allowing the user to attach/detach the device with a detent pin to make retrofitting easy (no additional hardware needed).



8102001
SALALIFT II WINCH
WITH 60' (18.3 M) OF 1/4" (6.4 MM) GALVANIZED
CABLE, MOUNTING BRACKET AND WINCH BAG



8000000
ADVANCED 7' (2.13 M) ALUMINUM TRIPOD
WITH ADJUSTABLE LOCKING LEGS, SAFETY
CHAINS, RUBBER SAFETY SHOES WITH SPIKED
EDGES, TOP PULLEY ASSEMBLY AND MOUNTING
BRACKET BASE 8005048

MODEL #	DESCRIPTION	TOTAL WEIGHT
8102001	SALALIFT II WINCH WITH 60' (18.3 M) OF 1/4" (6.4 MM) GALVANIZED CABLE, MOUNTING BRACKET AND WINCH BAG	16.3 KG
8102003	SALALIFT II WINCH WITH 60' (18.3 M) OF 1/4" (6.4 MM) STAINLESS STEEL CABLE, MOUNTING BRACKET AND WINCH BAG	16.3 KG
8102009	SALALIFT II WINCH WITH 90' (27.4 M) OF 3/16" (4.8 MM) GALVANIZED CABLE, MOUNTING BRACKET AND WINCH BAG	15.8 KG
8102011	SALALIFT II WINCH WITH 90' (27.4 M) OF 3/16" (4.8 MM) STAINLESS STEEL CABLE, MOUNTING BRACKET AND WINCH BAG	15.8 KG
8102005	SALALIFT II WINCH WITH 120' (36.6 M) OF 3/16" (4.8 MM) GALVANIZED CABLE, MOUNTING BRACKET AND WINCH BAG	16.7 KG
8102007	SALALIFT II WINCH WITH 120' (36.6 M) OF 3/16" (4.8 MM) STAINLESS STEEL CABLE, MOUNTING BRACKET AND WINCH BAG	16.7 KG
8102050	SALALIFT II WINCH WITH 50' (15.2 M) OF SYNTHETIC TECHNORA ROPE AND LIFELINE COUNTERWEIGHT, MOUNTING BRACKET AND WINCH BAG	14.9 KG



SMALLER. LIGHTER. EASIER. SAFER.

Don't complicate a rescue - the Rollgliss R550 keeps things simple. It's the lightest, most compact, easy to use design on the market. It offers the choice of rescue, evacuation, or the versatility of assisted rescue with lifting capabilities. When every second counts, count on the R550.



ROLLGLISS R550 RESCUE AND DESCENT DEVICE

RESCUE AND DESCENT KIT WITH RESCUE WHEEL, ANCHOR SLING, 2 CARABINERS AND A CARRYING BAG

3327050 50' (16m)
3327100 100' (30.5m)
3327150 150' (46m)
3327200 200' (61m)
3327275 275' (84m)
3327300 300' (92m)

More Lengths available on request

RESCUE EQUIPMENT



1150414
EXOFIT NEX ROPE ACCESS AND
RESCUE HARNESS SUSPENSION
SEAT SLING



2100093
RESCUE HOOK AND HOT STICK
ADAPTOR TOOL*
2100111
HOT STICK ADAPTOR TOOL ONLY*

** ITEMS SHOULD BE USED WITH
HOT STICK POLE*

EMERGENCY ESCAPE

- Secure R550 to anchor point
- Connect the snap hook to dorsal or front d-ring of harness
- Descend safely to the ground

ASSISTED RESCUE

- Secure R550 to anchor point
- Get into position above the victim
- Attach snap hook to victim
- Raise victim to unhook their fall arrest gear
- Descend victim safely to the ground

PICK-OFF RESCUE

- Use when a victim is out of reach
- Secure R550 to anchor point and lower a second rescuer to victim
- Attach victim to rescuer
- Raise victim to unhook their fall arrest gear
- Descend both rescuer and victim to safety

CUSTOM RESCUE

- The R550 can be used for custom rescues, like an angled descent
- Secure R550 to anchor point on or near the ground
- Run the rope up through a pulley above the victim
- Raise victim to unhook their fall arrest gear
- Lower the victim to the ground, away from structure

= rollgliss™ = RESCUE POLE

8900298

ROLLGLISS RESCUE POLE
ASSISTED POLE RESCUE KIT WITH 4' TO 16' (1.2
TO 4.9) ALUMINUM EXTENSION POLE, OVER-SIZED
ALUMINUM CONNECTION HOOK WITH 2-1/4" GATE
OPENING (57.1 MM) AND CARRYING BAG



= rollgliss™ =

ROLLGLISS R520 RESCUE AND DESCENT

This fully automatic, hands-free descent for bucket trucks, aerial lifts, towers, cranes and more is simply the best escape solution on the market. It's easier to use and requires less training.

3305040

50' ROLLGLISS R520 ESCAPE DEVICE
PROVIDES A QUICK, EFFICIENT
MEANS OF EVACUATION FROM
VARIOUS ELEVATED WORK SURFACES

Features and Benefits:

- Emergency rescue and evacuation from a wide variety of elevated work areas
- Fully automatic controlled descent
- Bidirectional design enables multiple rescues
- Dual redundant brake systems
- Integrated rope control ears
- Extremely compact and lightweight design
- Other lengths available up to 500 ft. (152 m) height



Additional Rollgliss accessories are on pages 30-31.

EQUIPMENT THAT WON'T LET YOU DOWN UNTIL YOU NEED IT TO

Capital Safety makes gear that's lighter, easier to use and quick to set up, because we want it to be there when you need it. Whether it's controlled decent rescue or technical rope access rescue you're looking for, we have you covered.

HARNESSES



1113323 SIZE XL
EXOFIT NEX ARC FLASH CONSTRUCTION STYLE
POSITIONING/RESCUE HARNESS
BACK AND FRONT WEB RESCUE LOOPS, BELT
WITH PAD AND PVC COATED ALUMINUM SIDE
D-RINGS, NOMEX®/KEVLAR® FIBER WEBBING
AND COMFORT PADDING, LOCKING QUICK
CONNECT BUCKLE LEG STRAPS

1113320 SMALL
1113321 MEDIUM
1113322 LARGE



1113328 SIZE XL
EXOFIT NEX ARC FLASH RESCUE HARNESS
BACK AND FRONT WEB RESCUE LOOPS, NOMEX®/
KEVLAR® FIBER WEBBING AND COMFORT
PADDING, LOCKING QUICK CONNECT BUCKLE
LEG STRAPS

1113325 SMALL
1113326 MEDIUM
1113327 LARGE



1110782 SIZE XL
DELTA ARC FLASH HARNESS
WITH 7,000-LB. (3175 KG) NYLON WEB, VEST
STYLE, BACK WEB LOOP, QUICK CONNECT
BUCKLES, LEATHER INSULATORS, RESCUE LOOPS

1110788 SMALL
1110780 MEDIUM
1110781 LARGE



1110842 SIZE XL
EXOFIT ARC FLASH HARNESS - DORSAL/RESCUE
WEB LOOPS
BACK AND FRONT WEB RESCUE LOOPS, COMFORT
PADDING WITH NOMEX®/KEVLAR® FIBER,
NYLON WEB, LEATHER INSULATORS, QUICK
CONNECT BUCKLE LEG STRAPS

1110964 SMALL
1110840 MEDIUM
1110841 LARGE



EXOFIT NEX™



1113348 SIZE XL
EXOFIT NEX ROPE ACCESS AND RESCUE HARNESS
.....
REPEL™ WEB, TECH-LITE™ ALUMINUM FRONT,
BACK AND SIDE D-RINGS, DUO-LOK™ QUICK CONNECT
BUCKLES AND HYBRID COMFORT PADDING
.....

1113345 SMALL
1113346 MEDIUM
1113347 LARGE

1113373 SIZE XL
EXOFIT NEX BLACK-OUT ROPE
ACCESS AND RESCUE HARNESS
.....
REPEL WEB, TECH-LITE ALUMINUM
FRONT, BACK AND SIDE D-RINGS,
DUO-LOK QUICK CONNECT BUCKLES
AND HYBRID COMFORT PADDING
.....

1113370 SMALL
1113371 MEDIUM
1113372 LARGE



1150414
EXOFIT NEX ROPE ACCESS
AND RESCUE HARNESS SEAT

I-SAFE 3.1 MOBILE APP FLEXIBLE. CONVENIENT. EFFICIENT.

Compatible with iPhones®, iPads® and Android™ smartphones or tablets.

VIRTUALLY ALL DBI-SALA® PRODUCTS INCLUDE i-SAFE FUNCTIONALITY

As part of the Capital Safety commitment to safety innovation, you can easily integrate the i-Safe application with your current line of DBI-SALA® products, making your life easier to track your world-class investments.

THE FIRST RFID SYSTEM DEDICATED TO FALL PROTECTION EQUIPMENT

i-Safe Intelligent Safety System is an invaluable tool for customers looking to:

- Save time
- Increase compliance
- Improve the management of the safety equipment inspection process



The Rollgliss Technical Rescue product line meets the needs of rescuers for rigging, encompassing everything from single descent systems to complicated flying foxes. The Rollgliss Technical Rescue Range compliments our already-established line of Industrial Rescue systems, including pre-rigged rescue kits like the Rollgliss R350, Rollgliss R550 and more. When your life and the lives of others depend on it, you want to know that your rescue kit won't fail you. Trust in the strength of a product that was made for working hard.

DESCENDERS



8700387
NOWORRIES™ DOUBLE
STOP DESCENDER
ANODIZED GOLD
ALUMINUM 10.5-12.0MM
ROPE



8700388
NOWORRIES™ DOUBLE
STOP DESCENDER
ANODIZED BLUE/GOLD
ALUMINUM 12.5-13.0MM
ROPE

RIGGING PLATES



2189999
RIGMASTER™ RIGGING PLATE
PAW-SHAPED FIVE
ANODIZED GOLD



2189997
RIGMASTER RIGGING PLATE
SMALL TRIANGLE SIX
ANODIZED GOLD

CARABINERS & QUICK LINKS



8700168
RIGMASTER CARABINERS*
SMALL OFFSET D RESCUE
CARABINER ALUM 5/8" (16 MM)
SCREW GATE 6,750 LBS. (30 KN)



8700198
RIGMASTER CARABINERS*
MEDIUM OFFSET D RESCUE
CARABINER ALUM 7/8" (22 MM)
SCREW GATE 8,100 LBS. (36 KN)




2000025
RIGMASTER CARABINERS
MEDIUM OFFSET D RESCUE
CARABINER ALUM 7/8" (22 MM)
AUTO LOCKING 8,100 LBS. (36 KN)

**Carabiners do not meet ANSI standards.*

PULLEYS



8700012
SINGLE ALUM
1.5" (40 MM) UP TO 7/16" (11 MM)



8700013
PRUSIK MINDING SINGLE ALUM
1.5" (40 MM) UP TO 7/16" (11 MM)



8700057
RESCUEMATE™ TRANSPORT PULLEY
TYROLEAN "V" ALUM 2.25" (60 MM)
UP TO 1/2" (13 MM)

**ROPES FOUND ON PG.23*





HAUL KITS

8701100
RESCUEMATE MICRO HAUL KIT
MECHANICAL ADVANTAGE: 6:1
WORKING LENGTH: 6.5' (2 M)
ROPE SIZE: 5/16" (8 MM)
WORKING LOAD LIMIT: 660 LBS. (300 KG)

8704104
RESCUEMATE AUTO LOCK HAUL KIT
MECHANICAL ADVANTAGE: 4:1
WORKING LENGTH: 33' (10 M)
ROPE SIZE: 7/16" (11 MM)
WORKING LOAD LIMIT: 660 LBS. (300 KG)



ACCESSORIES

ROPECRAFT™ BAGS - PVC

PART #	CI	HOLDS 7/16" (11MM)	HOLDS 1/2" (13MM)
8700225	1,525CI (25L)	164' (50M)	82' (25M)
8700222	2,440CI (25L)	328' (100M)	164' (50M)
8700223	3,050CI (25L)	655' (200M)	328' (100M)
8700224	3,660CI (25L)	980' (300M)	655' (200M)



ASCENDERS

8700523
LEFT-HAND ASCENDER
ROPE SIZE: 7/16"-1/2"
(10.5-13 MM)



8700524
RIGHT-HAND ASCENDER
ROPE SIZE: 7/16"-1/2"
(10.5-13 MM)



8700522
CHEST ASCENDERS
GOLD, RETROFIT
ROPE SIZE: 7/16"-1/2"
(10.5-13 MM)



EXPLORER FOOT LOOPS & ETRIER

PART #	DESCRIPTION
1219006	SINGLE-LEG WEBBING FOOT LOOP ADJUSTABLE UP TO 6' (1.8 M)
1219020	5-STEP ETRIER WEBBING 6' (1.8 M)

SWIVEL & GEAR ROLL

8700144
SWIVEL
MINIMUM BREAKING
STRENGTH: 9,000 LBS. (40 KN)



1219020
EXPLORER™ ETRIER
EXPLORER 5-STEP ETRIER,
6' (1.8M) LENGTH



INNOVATION THAT BRINGS WORKERS AT HEIGHT HOME SAFELY.

Capital Safety is a global company solely dedicated to fall protection and rescue. Our focus is razor sharp.
And it continually drives us to design and manufacture the safest possible height safety gear.

We understand the industries we serve and listen to the workers in the field. We employ the best engineers to create innovative solutions and patent the products that keep workers safe at heights around the world. Capital Safety has the best quality and largest range of fall protection products in the industry. But we're more than a product company.

We take an innovative approach in bringing our products to the field. We have created international partnerships and a vast network of authorized distributors, certified installers and service centers. We offer on-site and in-house training. And we're ISO 9001-2008 certified for customer service, as well as manufacturing and engineering.

Capital Safety is one of the world's leading manufacturers of fall protection and rescue equipment, with decades of experience and a legacy of innovation. Look for complete solutions in our extensive line of DBI-SALA® and Protecta® products.



Capital Safety - USA: 800 328 6146
www.capitalsafety.com info@capitalsafety.com