

TURBO HP MAX
FORCE

TURBO HP2
FORCE

The portable blowing machine that puts you in the lead with

- High return on investment** – Truck mount system capabilities at a fraction of the cost.
- Labor savings** -- Fastest in-class install speeds for dense pack, blow behind netting, and attics while meeting manufacturer's coverage charts. 15 cu foot hopper holds 2+ bags cellulose or 1 bag fiberglass enhancing crew sequencing.
- Application versatility** – Choose your product, choose your installation type – this system can do it all (attics, walls, & fireproofing).
- Ease of Use** – GoWireless industrial wireless remote minimizes set-up & tear down time, easily accessible circuits provide power, portable, fits thru doors.

Intec Quick-Access™ - IQ_A™ We've made it easy to make machine adjustments, perform routine maintenance, and complete repairs to give you years of trouble-free use.



Revolutionary tilt back design simplifies access to airlock, agitators, and all working components.



Patent US9334661B2
Patents Pending

Select the version that is best for your business

Version	Production (lbs / min)		Electrical Requirements (120V)
	cellulose	fiberglass	
TURBO FORCE HP MAX	41 - 55	15 - 20	2-15amp 1-20amp
TURBO FORCE HP2	31 - 41	12 - 15	3-15amp

THE Portable Insulation Blowing Machine that makes owners of truck-mount systems envious

integrity

excellence

innovation

trust

800-666-1611

www.inteccorp.com

Rev: 20201220

Intec's Professional Grade Equipment



Engineered for High Productivity

Built-to-Last for High Value Generation



Insulation Blowing Machines



Specifications



- Weight: 478lbs (217kg) TURBO FORCE HP2
488lbs (222kg) TURBO FORCE HP MAX
- Body: Powder-coated steel
- Hose outlet: 3 inches (7.6cm)
- Electrical: 115VAC
3 - 15amp circuits with TURBO FORCE HP2
2 - 15amp & 1-20amp circuit with TURBO FORCE HP MAX
- Industrial Wireless Remote with 250' operating range
- Blower(s): 115 VAC – 15 amp, two-stage generate exceptionally high pressure
- Agitator motor:
TURBO FORCE HP2: ½ hp, 115VAC, 7.1 amp
TURBO FORCE HP MAX: ¾ hp, 115VAC, 9.5 amp
- Airlock motor:
TURBO FORCE HP2: ½ hp, 115VAC, 7.1 amp
TURBO FORCE HP MAX: 1 hp, 115VAC, 7.8 amp
- Hopper: 15 cubic feet
- Warranty: 1 year, limited.

Specifications subject to change; contact Intec for current specifications

Machine Features

Wireless transmitter comes with four placement options



Jacket for Wrist or Hose



Lanyard



Belt Clip




Hopper holds volumes of insulation

Large Loading Platform



Easy to access components simplifies machine adjustments & routine maintenance



Easy reach & quick pin setting let's you quickly dial in your material flow

Two filters with easy access ; run-flat recessed wheels



Professional Grade - Heavy Duty Capabilities



Dense Pack



Blow Behind Netting



Spray On




Attics

Maximize your Return On Investment



With Intec blowing machines

Distributed by

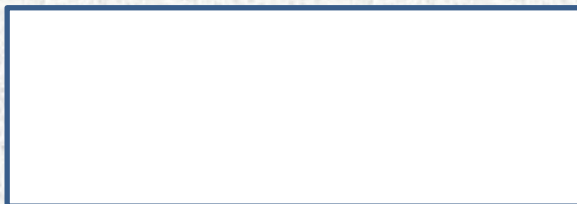

Manufactured by

Insulation Technology Corporation, d.b.a. Intec
9251 Bruin Boulevard
Frederick, CO 80504

1-800-666-1611
www.inteccorp.com

Click pictures for website link



Local: 303-833-6644
Fax: 303-833-6650
sales@inteccorp.com

... it's the 'tec' inside that counts!