




it is possible to fit a becket or a springline



snap-loops of various lengths and diameters are also available separately




dynablock is also suitable for a standing lashing with a thin dyneema line



TWO SIZES


D SHEAVE	Ø LINE	SWL	WEIGHT
mm	mm	kg	gr
44	10	600	80
56	12	1000	140



BLOCK & LOOP

Mod. DBS44	Size 44 mm
Mod. DBS56	Size 56 mm

snap-loop is included



STANDING LASHING

Mod. DBL44	Size 44 mm
Mod. DBL56	Size 56 mm


connecting line is not included

Antal srl

Via del Progresso, 10 35127 Padova - Italy Tel. +39 049 8701265 / 8702655 Fax: +39 049 760906 www.antal.it - antal@antal.it

Mod. DBL56

56 mm sheave for 12 mm line SWL = 1000 kg For Lashing



Antal -DYNA-BLOCK

User's Guide

Date 05/2018 Rev. 01




MODEL


DBL56




made in italy




Dyneema core protected by polyester cover



revolving resin cheek-plates



fast, easy and safe connection

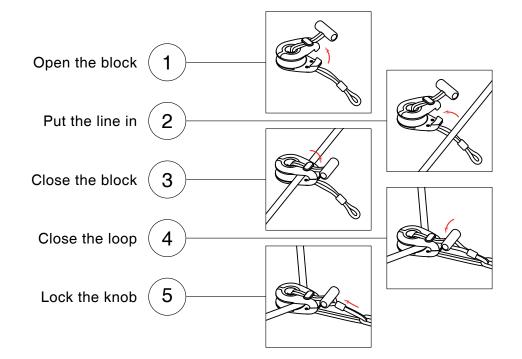

Dynablock is a snatch block with a snap loop for a fast, easy and safe linkage.

Resin sheave on composite fibre bushing with 2 side ball bearings.


UV resistant resin + glass fibre revolving cheekplates.

Dyneema 70 snap loop with polyester protecting cover.


Protect the loop from abrasion!

Avoid rough surfaces and sharp edges.


The Dyneema loop is protected by a high resistant polyester cover.




√ ok



√ OK



/ OK



X NO

