



PRODUCT DATA SHEET 09.23



6122T


SCREWBOLT

DEFINING FEATURES

- Self tapping - designed to be screwed directly into substrate
- No plugs or resins required
- No expansion stress
- Zinc and yellow passivate plated
- Removable
- Multiple lengths available

MADE IN

BRITAIN

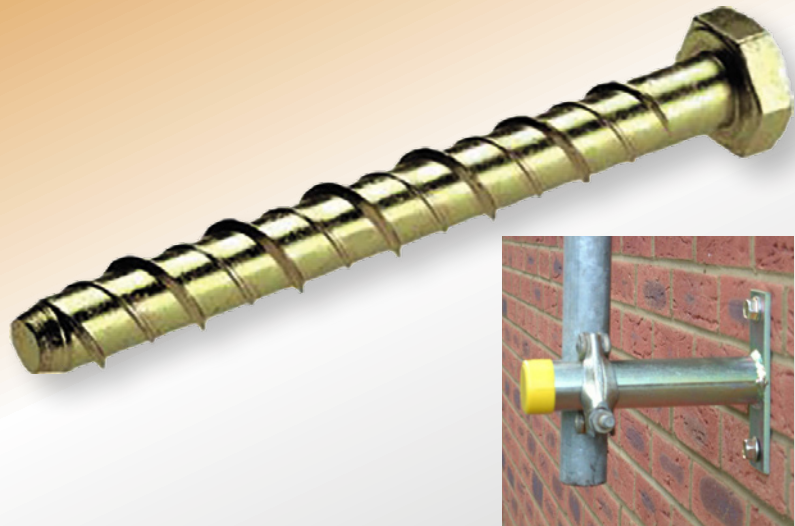

FIRST FOR SAFETY

ORDERING INFORMATION

PART NO	LENGTH (MM)	FINISH	BOLT WEIGHT (G)	CARTON QUANTITY	COMPATIBLE MATERIALS	HEAD SIZE (MM)	THREAD DIAMETER (MM)
AF-6122T-75	75	Zinc Plated	10	50	Concrete, Brick, Concrete block, Stone	19	12
AF-6122T	100			50			
AF-6122T-150	150			20			

OFTEN PURCHASED WITH:



SUITABLE INDUSTRIES



SCAFFOLDING



OIL & GAS



CONSTRUCTION



ROOFING



BRICKWORK



MAINTENANCE

FIRST FOR SOLUTIONS

01432 346800 | sales@leachs.com | www.leachs.com