



# PRODUCT DATA SHEET 07.23



6 2 2 3 | **SCAFFOLD GIRDER BEAM CLAMP**

## DEFINING FEATURES

- Tough and simple design
- Manufactured from steel
- Rust proof

CONFORMITY:  
**BS1139,  
EN74B & AS 1576.1**


### ADDITIONAL INFORMATION:

These clamps must be used in pairs.



**FIRST FOR SAFETY**

## ADDITIONAL FEATURES

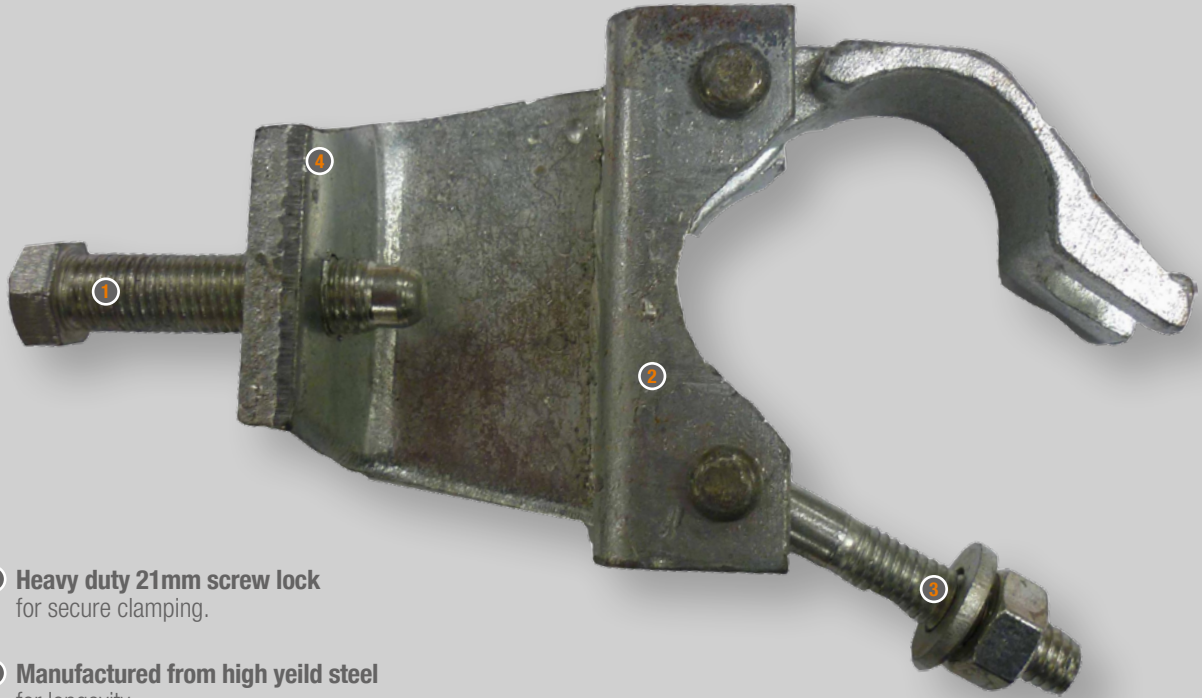

- 1 Heavy duty 21mm screw lock for secure clamping.
- 2 Manufactured from high yeild steel for longevity.
- 3 Standard 7/16" T bolt scaffold clamp.
- 4 Suitable for use with a flange thickness of up to 45mm.

## INSTALLATION:



SP-1385P



RA-1551-21



RA-1511-19

---

# FIRST FOR QUALITY

## ORDERING INFORMATION

PART NO	MAX FLANGE DEPTH	TUBE CLAMP WIDTH	UNIT WEIGHT	SWL	BAG QUANTITY	PALLET QUANTITY	DESIGN LOAD
AF-6223	45mm	48.3mm	1.4kg	600kg	20	900	10kN

## SUITABLE INDUSTRIES



SCAFFOLDING



OIL & GAS



CONSTRUCTION



ROOFING



BRICKWORK



DEMOLITION



TRANSPORTATION



MAINTENANCE

---

# FIRST FOR SOLUTIONS

01432 346800 | sales@leachs.com | www.leachs.com