

3

BIGBEN

# PRINTED SCAFFOLD SHEETING



# BIGBEN® SUPERCLAD® PRINTED SCAFFOLD SHEETING

## DURABILITY DESCRIPTION

Digitally printed scaffold sheeting with Fire Retardant ink and printing process which is certified to the Fire Retardant Loss Prevention Standard (LPS) 1215\*.

Scaffold sheeting digitally printed provides you with the opportunity to wrap any building, site, fencing or hoarding with a highly visible message. Full colour photos, images and text can be mixed and printed up to nearly 3mtrs high and 39mtrs long depending on the size of sheeting chosen.

The **BIGBEN® Superclad®** sheeting which is manufactured using a strong reinforced multifilament polyester grid, laminated on both sides with a waterproof LDPE.

**BIGBEN® Superclad®** sheeting is available in non Fire Retardant and Fire Retardant certified to LPS1215.

The print has exceptional all weather performance and UV qualities and will normally last at least 6 months, maximising your investment

Choosing the correct grade scaffold sheeting for your project is important. The chart on the right should help you in making the right choice.

DURATION OF BUILDING PROJECT			
SITE	<3 MONTHS	3-6 MONTHS	6-12 MONTHS
SURROUNDED BY HIGH BUILDINGS	BIG BEN Superclad Economy 150GSM Standard 180GSM Premium 240GSM	BIG BEN Superclad Economy 150GSM Standard 180GSM Premium 240GSM	BIG BEN Superclad Premium 240GSM
URBAN/ INDUSTRIAL AREA	BIG BEN Superclad Economy 150GSM Standard 180GSM Premium 240GSM	BIG BEN Superclad Standard 180GSM Premium 240GSM	BIG BEN Superclad Premium 240GSM
COAST/ OFFSHORE AREA	BIG BEN Superclad Standard 180GSM Premium 240GSM	BIG BEN Superclad Premium 240GSM	

## APPLICATION

**BIGBEN® Superclad®** Scaffold Sheeting should typically be fixed to the scaffolding horizontally with a recommended fixing pattern of one **BIGBEN®** Toggle Tie per m2.

However any fixing must be placed according to your calculations for each project.

### FOR WEATHER PROTECTION

If the prime purpose is to protect personnel against wind and rain, we recommend the upper sheets overlap the lower sheets externally to ensure rain runs down the outside of the sheeting.

### FOR CONTAINMENT

If the prime purpose is to protect the surrounding area from the impact of demolition, we recommend the upper sheets overlap the lower sheets internally to contain debris within the sheeting.

### SCAFFOLDING DESIGN & INSTALLATION

When scaffold sheeting is to be installed, the structure must be designed to all relevant BS standards & codes of practice to accommodate the increase in wind loadings. Guidance should always be obtained by a qualified scaffold designer, or structural engineer before any sheeting is installed, and not before a full risk assessment has been carried out. Only qualified Scaffolders should undertake the installation of scaffold sheeting.

## FEATURES & BENEFITS

The print has exceptional all weather performance and UV qualities and will normally last at least 6 months, maximising your investment.

Digital printing allows you to wrap any building in a powerful, highly visible message - often used to promote your company or marketing message.

Full colour photos, images and text can be mixed and printed up to nearly 3mtrs high and 39mtrs long depending on the size of sheeting chosen.

No minimum order quantity allows one off promotional sheeting orders.

Fast delivery service – usually delivered to your door in 2 weeks.

# BIGBEN® SUPERCLAD® SHEETING PRODUCT OVERVIEW

## BIGBEN® Superclad® Standard (180gsm) Scaffold Sheeting – Non Fire Retardant

2m x 45m Roll	Weight per roll 16.4 kg	Pallet 30 rolls
2.25m x 45m Roll	Weight per roll 17.2 kg	Pallet 30 rolls
3m x 45m Roll	Weight per roll 23.2 kg	Pallet 16 rolls

## BIGBEN® Superclad® Standard (180gsm) Scaffold Sheeting – Fire Retardant

2m x 45m Roll	Weight per roll 16.4 kg	Pallet 30 rolls
3m x 45m Roll	Weight per roll 23.2 kg	Pallet 16 rolls

## BIGBEN® Superclad® Standard (180gsm) Scaffold Sheeting – Fire Retardant – LPS1215 Certified

2m x 45m Roll	Weight per roll 18.2 kg	Pallet 30 rolls
2.25m x 45m Roll	Weight per roll 19 kg	Pallet 30 rolls
3m x 45m Roll	Weight per roll 24.8 kg	Pallet 16 rolls

## BIGBEN® Superclad® Premium (240gsm) Scaffold Sheeting – Fire Retardant – LPS1215 Certified


2m x 45m Roll	Weight per roll 22.8 kg	Pallet 25 rolls
2.25m x 45m Roll	Weight per roll 25.2 kg	Pallet 25 rolls
3m x 45m Roll	Weight per roll 33.6 kg	Pallet 16 rolls

## BIGBEN® Superclad® ECO Standard (180gsm) Scaffold Sheeting – EN 13501-1 Class B


2m x 45m Roll	Weight per roll 17kg	Pallet 30 rolls
2.25m x 45m Roll	Weight per roll 18.4kg	Pallet 30 rolls
3m x 45m Roll	Weight per roll 24.2kg	Pallet 16 rolls

## BIGBEN® Superclad® ECO Premium (240gsm) Scaffold Sheeting – EN 13501-1 Class B

2m x 45m Roll	Weight per roll 21kg	Pallet 30 rolls
2.25m x 45m Roll	Weight per roll 22.9kg	Pallet 30 rolls
3m x 45m Roll	Weight per roll 30.6kg	Pallet 16 rolls

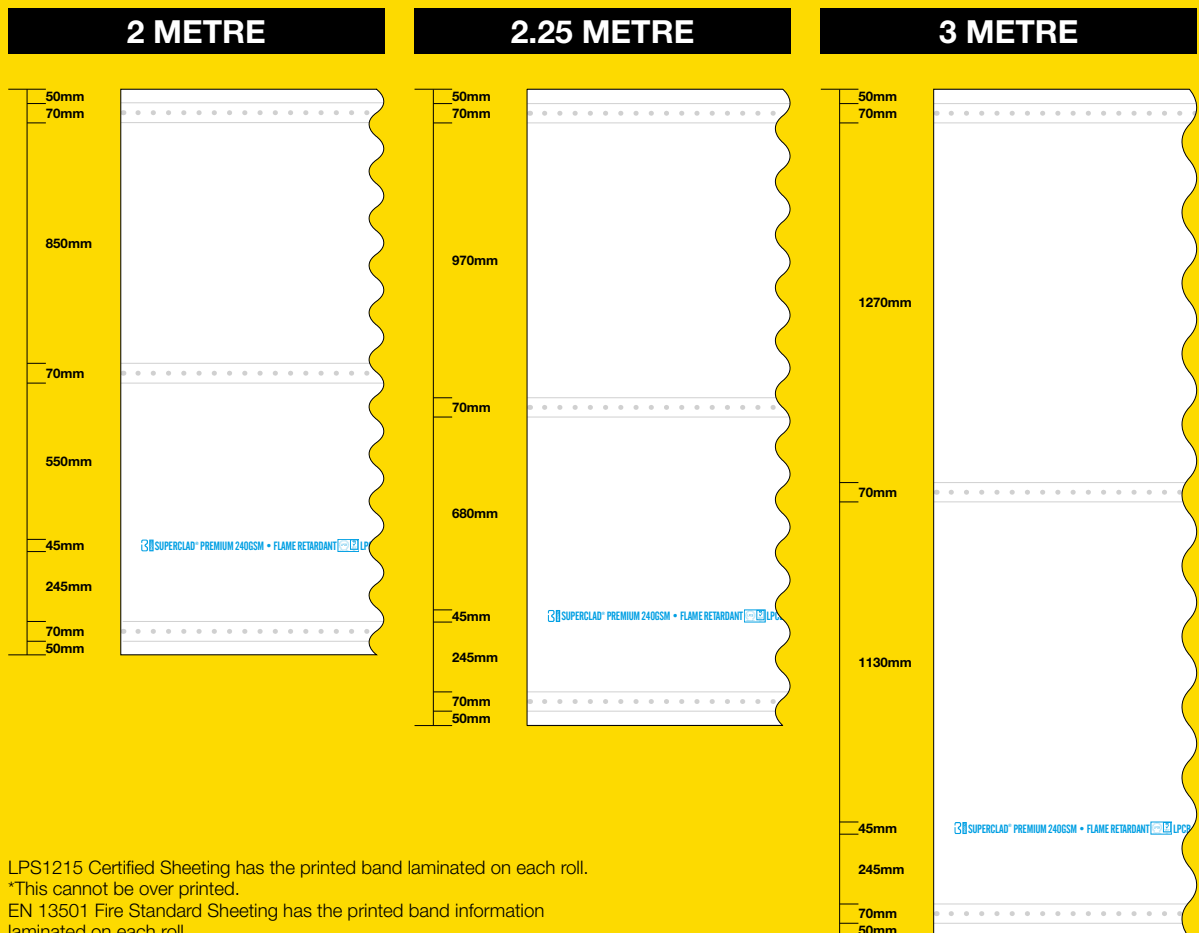

# **BIGBEN<sup>®</sup> SUPERCLAD<sup>®</sup>** **PRINTED SCAFFOLD SHEETING**

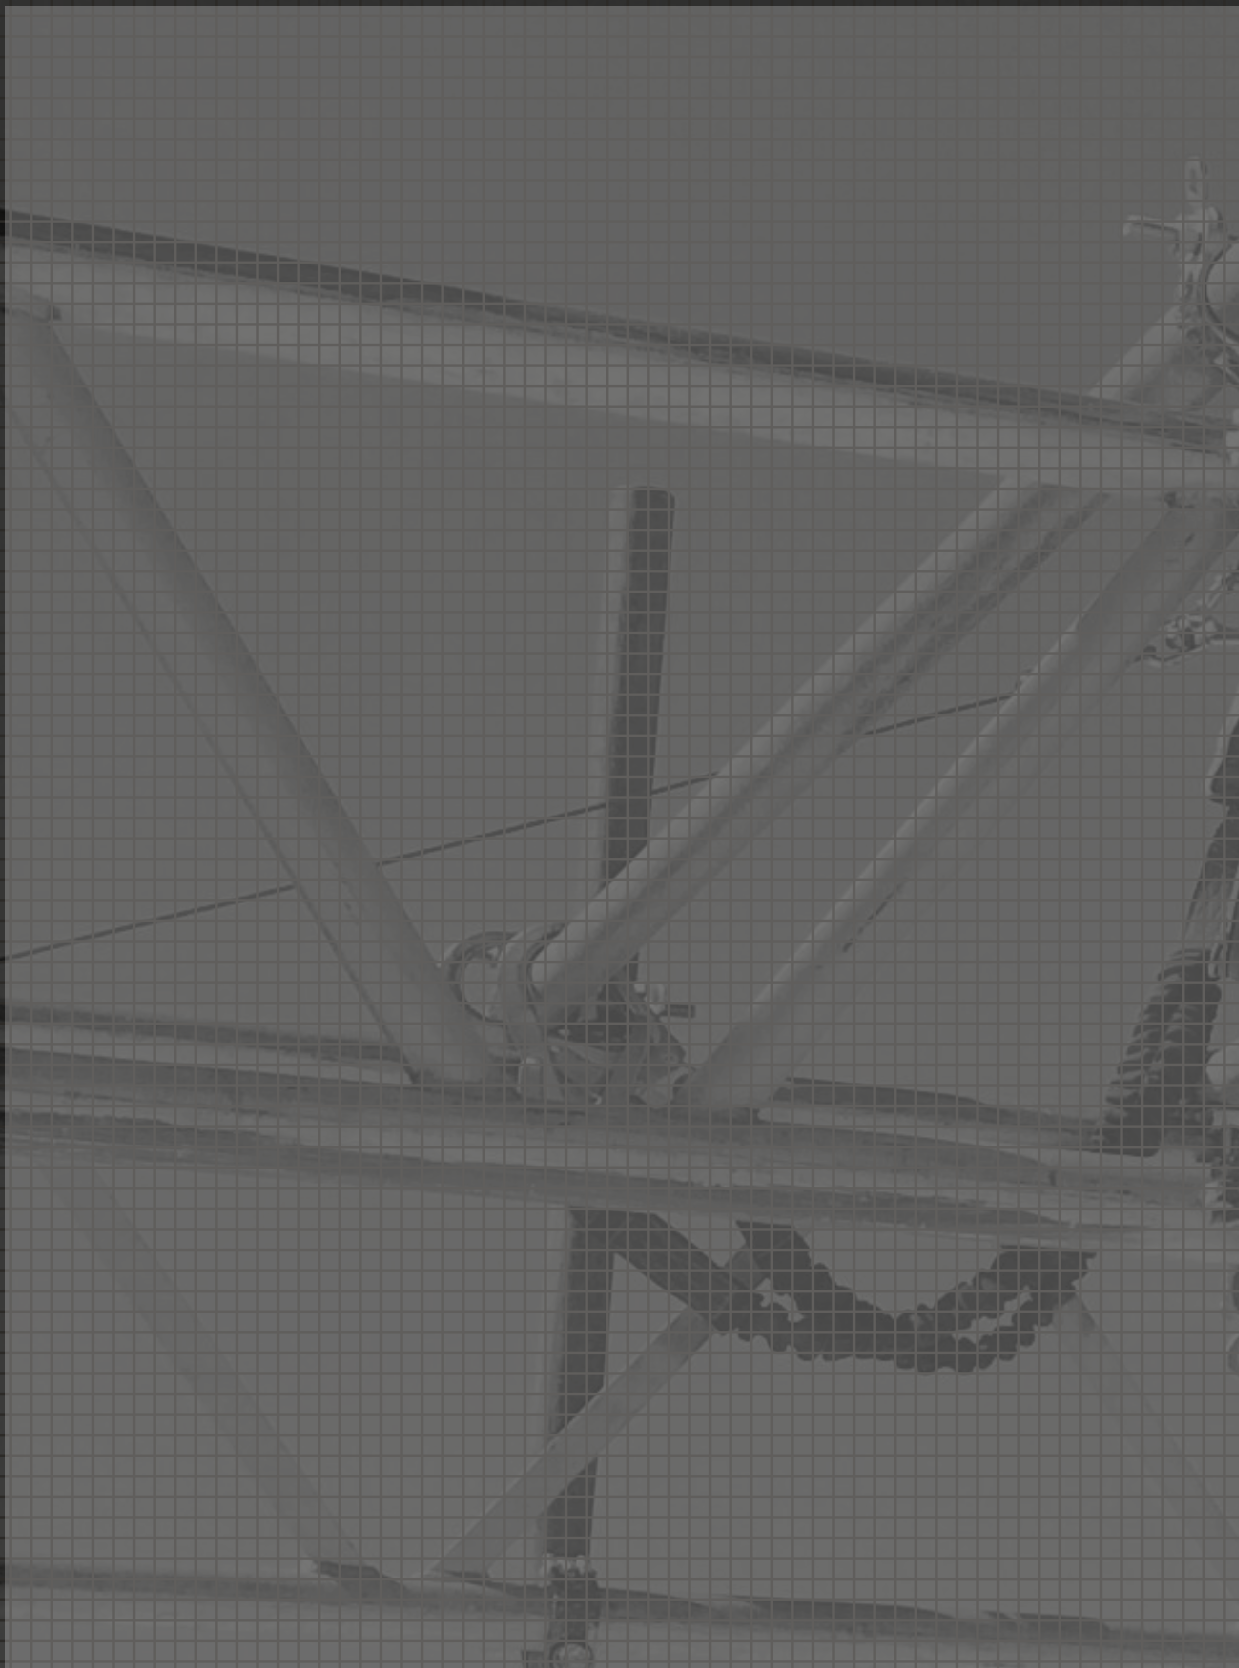

DISTRIBUTED BY LEACH'S  
BEACON PARK, 228 HOLME LACY ROAD, HEREFORD HR2 6BQ  
TELEPHONE 01432 346 800 EMAIL SALES@LEACHS.COM  
WWW.LEACHS.COM