

4

## PRODUCT DATA SHEET 03.23



3

(C) | TWIN TAILED ELASTICATED
(C) | FALL ARREST LANYARD

# DEFINING **FEATURES**

#### **INCLUDES:**

- 2x Alloy Scaff Hooks
- Shock Absorber
- Steel Locking Carabiner
- Self Recoiling Webbing
- Available in 3 lengths

#### **CONFORMITY:**

#### **EN355**

Tested and approved to a SWL of 100kg.

## ADDITIONAL FEATURES/INFORMATION:

#### Lifespan:

This product has a life of 10 years from date of manufacture or 5 years from first use.







# **ADDITIONAL**

#### Webbing

• Conforms to: EN355

• Length Available: 1.5m, 1.75m & 2m

Self Recoiling Technology

#### Carabiner

Material: Steel

• Opening: 18mm

• Static Strength: 25kN

Lock Type: Screw Gate

#### **3** 2x ScaffHooks

Material: Aluminium

• Opening: 60mm

Static Strength: 20kNLock Type: 2 Stage Gear Lock

#### Shock Pack

- Clear information for speedy access to serial number, manufacturing and expiry
- Protective Sleeve to preserve the shockabsorbing webbing and vital information







# **COMPATIBLE**

### **ATTACHMENTS**

#### **ALL BIG**BEN **HARNESSES**













#### **SUITABLE FOR USE WITH LIFELINES**



FP-7400G-20



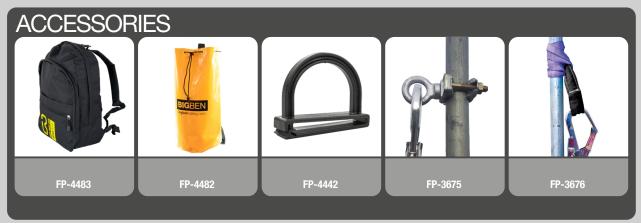

# ORDERING INFORMATION

PART NO	WEBBING TYPE	SCAFFHOOK/CARABINA MATERIAL	LOCK TYPE		LENGTH	SWL
			Scaffhook	Carabina	LENGIN	SWL
FP-4496-150	Elasticated Bungee	Steel	2 Stage Gear-Lock	Screw Gate	1.50m	100kg
FP-4496-175	Elasticated Bungee	Steel	2 Stage Gear-Lock	Screw Gate	1.75m	100kg
FP-4496	Elasticated Bungee	Steel	2 Stage Gear-Lock	Screw Gate	2m	100kg

## **SUITABLE INDUSTRIES**

















SCAFFOLDING

OIL & GAS

CONSTRUCTION

ROOFING

BRICKWORK

DEMOLITION

TRANSPORTATION

MAINTENANCE

TAKING SAFETY TO NEW HEIGHTS



DISTRIBUTED BY:

#### LEACH'S

Beacon Park, 228 Holme Lacy Road, Hereford HR2 6BQ Tel: 01432 346800 Email: sales@leachs.com First for Safety www.leachs.com



