

PRODUCT DATA SHEET 03.23



3

505E

ELASTICATED FALL RESTRAINT LANYARD

DEFINING **FEATURES**

INCLUDES:

- Self-Recoiling Webbing
- Alloy Gear Locking ScaffHook
- Steel Locking Carabina
- Available in 3 lengths

CONFORMITY:

EN354

EN358

ADDITIONAL FEATURES/INFORMATION:

Life Span;

10 years from date of manufacture or 5 years from first use.







FEATURES

Webbing

- Conforms to: EN358 & EN354
- Length Available: 1m, 1.5m & 2m
- Self Recoiling Technology

Carabiner

- Material: Steel
- Opening: 18mm
- Static Strength: 25kN
- Lock Type: Screw Gate

3 Scaff Hook

- Material: Aluminium
- Opening: 60mmStatic Strength: 20kN
- Lock Type: 2 Stage Gear Lock





TAKING SAFETY TO NEW HEIGHTS

COMPATIBLE ATTACHMENTS & ACCESSORIES

ATTACHMENTS

ALL BIGBEN **HARNESSES**













SUITABLE FOR USE WITH LIFELINES





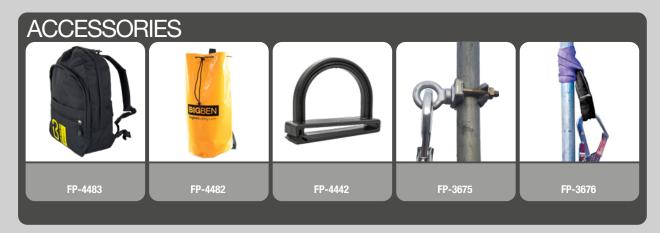





ORDERING INFORMATION

PART NO	MATERIAL		LOCK TYPE		LENGTH
	Webbing	Scaffhook/Carabina	Scaffhook	Carabina	LENGIN
FP-4505E-100	Polyester	Steel	2 Stage Gear-Lock	Screw Gate	1m
FP-4505E-150	Polyester	Steel	2 Stage Gear-Lock	Screw Gate	1.5m
FP-4505E-200	Polyester	Steel	2 Stage Gear-Lock	Screw Gate	2m

SUITABLE INDUSTRIES

















SCAFFOLDING

OIL & GAS

CONSTRUCTION

ROOFING

BRICKWORK

DEMOLITION

TRANSPORTATION

MAINTENANCE

TAKING SAFETY TO NEW HEIGHTS



DISTRIBUTED BY:

LEACH'S

Beacon Park, 228 Holme Lacy Road, Hereford HR2 6BQ Tel: 01432 346800 Email: sales@leachs.com First for Safety www.leachs.com



