

PRODUCT DATA SHEET 03.23



3

თ 0

2

4

BRAIDED ROPE FALL RESTRAINT LANYARD

DEFINING **FEATURES**

INCLUDES:

- Very Light Weight
- Climbing Grade Rope
- Suitable for explosion-hazard zones
- Available in 3 lengths

CONFORMITY:

EN 354

ADDITIONAL FEATURES/ INFORMATION:

Life span:

This product has a life of 10 years from date of manufacture or 5 years from date of first use.







Climbing Grade Kernmantle Rope To ensure maximum durability.

- 2 Two Stage Gear-Locking Steel Scaffhook
 - Opening: 60mm

 - Static Strength: 20kNLock Type: 2 Stage Gear Lock
- Steel Locking CarabinaOpening: 18mm

 - Static Strength: 25kN
 - Lock Type: Screw Gate
- Individually Serial Numbered For identification and traceability.
- Plastic Eyelets To protect the rope and increase longevity.
- Heat Sealed Connection For better protection against wear.





TAKING SAFETY TO NEW HEIGHTS

COMPATIBLE ATTACHMENTS & ACCESSORIES

ATTACHMENTS

ALL BIGBEN **HARNESSES**













SUITABLE FOR USE WITH LIFELINES





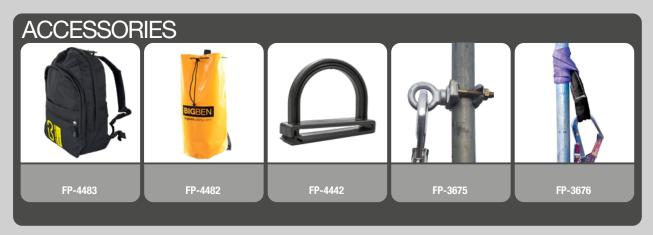



ORDERING INFORMATION

PART NO	MATERIAL		LOCK TYPE		LENGTH	UNIT
	Webbing	Scaffhook/Carabina	Scaffhook	Carabina	LENGIN	WEIGHT
FP-4509-100	Polyester	Steel	2 Stage Gear-Lock	Screw Gate	100cm	710g
FP-4509-150	Polyester	Steel	2 Stage Gear-Lock	Screw Gate	150cm	840g
FP-4509-200	Polyester	Steel	2 Stage Gear-Lock	Screw Gate	200cm	920g

SUITABLE INDUSTRIES

















SCAFFOLDING

OIL & GAS

CONSTRUCTION

ROOFING

BRICKWORK

DEMOLITION

TRANSPORTATION

MAINTENANCE

TAKING SAFETY TO NEW HEIGHTS



DISTRIBUTED BY:

LEACH'S

Beacon Park, 228 Holme Lacy Road, Hereford HR2 6BQ Tel: 01432 346800 Email: sales@leachs.com First for Safety www.leachs.com



