

## PRODUCT DATA SHEET 03.23





**495UC** 

# BIGGUY SINGLE ELASTICATED FALL ARREST LANYARD

**WIDE OPENING SCAFFHOOK** 

# DEFINING **FEATURES**

#### **INCLUDES:**

- Wide Opening Scaffhook
- Steel Twist-Lock Carabina
- Self-Recoiling Webbing
- Available in 3 lengths

#### **CONFORMITY:**

#### **EN355**

Tested and approved to a SWL of 150kg.

## ADDITIONAL FEATURES/INFORMATION:

#### Lifespan;

This Product Has a life of 10 years from date of manufacture or 5 years from date of first use.









#### **ADDITIONAL FEATURES**

#### Webbing

- Conforms to: EN355
- Length Available: 1.5m, 1.75m & 2m
- Self Recoiling Technology

#### Carabiner

- Material: Steel
- Opening: 18mmStatic Strength: 25kN
- Lock Type: Screw Gate

#### **3** Scaff Hook

- Material: Aluminium
- Opening: 60mm
- Static Strength: 20kNLock Type: 2 Stage Gear Lock

#### Shock Pack

- Clear information for speedy access to serial number, manufacturing and expiry date.
- Protective Sleeve to preserve the shockabsorbing webbing and vital information.







# COMPATIBLE ATTACHMENTS & ACCESSORIES

### **ATTACHMENTS**

#### **ALL BIG**BEN **HARNESSES**












#### **SUITABLE FOR USE WITH LIFELINES**





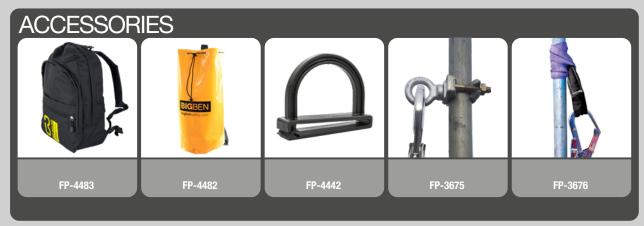



# ORDERING INFORMATION

PART NO	WEBBING TYPE	SCAFFHOOK/ Carabina	LOCK TYPE		LENGTH	SWL
			Scaffhook	Carabina	LENGIN	SWL
FP-6495UC-150	Elasticated Bungee	Steel	2 Stage Gear-Lock	Screw Gate	1.50m	150kg
FP-6495UC-175	Elasticated Bungee	Steel	2 Stage Gear-Lock	Screw Gate	1.75m	150kg
FP-6495UC	Elasticated Bungee	Steel	2 Stage Gear-Lock	Screw Gate	2m	150kg

## **SUITABLE INDUSTRIES**

















SCAFFOLDING

OIL & GAS

CONSTRUCTION

ROOFING

BRICKWORK

DEMOLITION

TRANSPORTATION

MAINTENANCE

TAKING SAFETY TO NEW HEIGHTS



DISTRIBUTED BY:

#### LEACH'S

Beacon Park, 228 Holme Lacy Road, Hereford HR2 6BQ Tel: 01432 346800 Email: sales@leachs.com First for Safety www.leachs.com



