



PRODUCT DATA SHEET 08.23




2921A

**BRAKED PULLEY
SWIVEL ARM**

DEFINING FEATURES

- Lightweight aluminium
- Swivel Function
- Safety locking pin

CONFORMITY:
CE MARKED

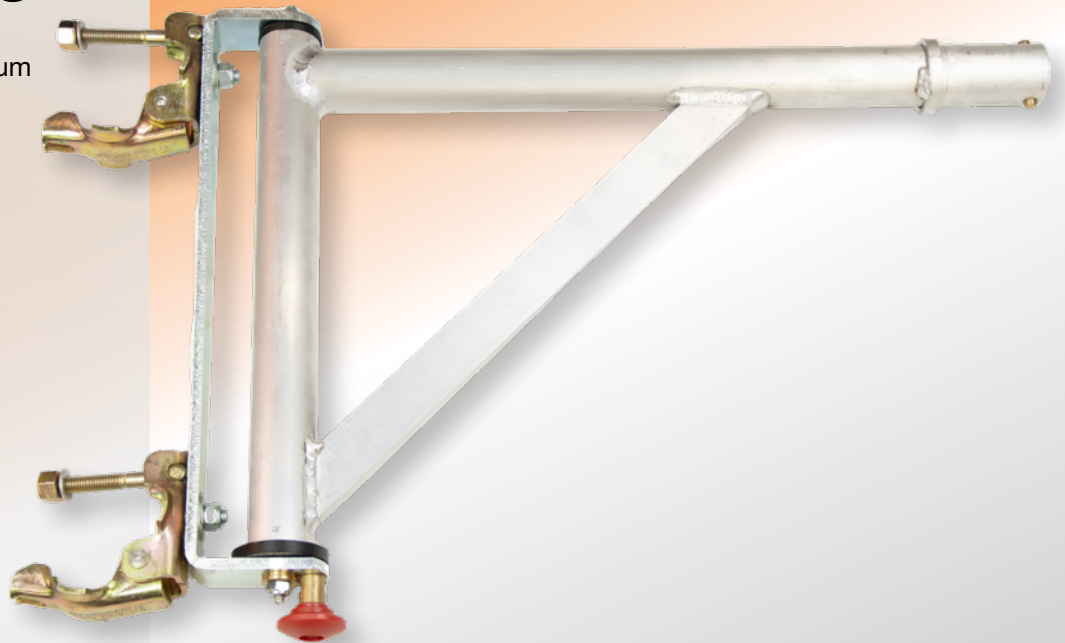

FIRST FOR SAFETY

ADDITIONAL FEATURES

- 1 **Ultra lightweight aluminium**
- 2 **Locking swivel function** for better accessibility.
- 3 **Double scaffold clamps** for secure installation.
- 4 **Locking mount slot** for additional security.
- 5 **Additional crossbrace** for enhanced strength.



ACCESSORIES:



LH-2919



LH-7135

FIRST FOR QUALITY

ORDERING INFORMATION

PART NO	LENGTH	UNIT WEIGHT	SUPPORT LOAD	MAX WORKING LOAD	MATERIAL
LH-2921A	58cm	5.6kg	4.4kg	50kg	Aluminium/ Steel

SUITABLE INDUSTRIES



SCAFFOLDING



OIL & GAS



CONSTRUCTION



ROOFING



BRICKWORK



DEMOLITION



TRANSPORTATION



MAINTENANCE

FIRST FOR SOLUTIONS

01432 346800 | sales@leachs.com | www.leachs.com