



PRODUCT DATA SHEET 03.23



∞ | RATCHET STRAPS
9 |
2 | 4 TONNE

DEFINING FEATURES

INCLUDES:

- Webbing manufactured from robust and durable polyester
- Quick release mechanism
- 1 x J-hook
- Designed for all tow, hoist and tie-down applications.
- Multiple length options


CONFORMITY:

EN12195-2:2001

Tested and approved to a SWL of 4000kg.

ADDITIONAL FEATURES/ INFORMATION:

The Leach's Ratchet Straps are used worldwide in a wide range of environments including: warehousing, haulage, farming/agriculture, building, construction and scaffolding.

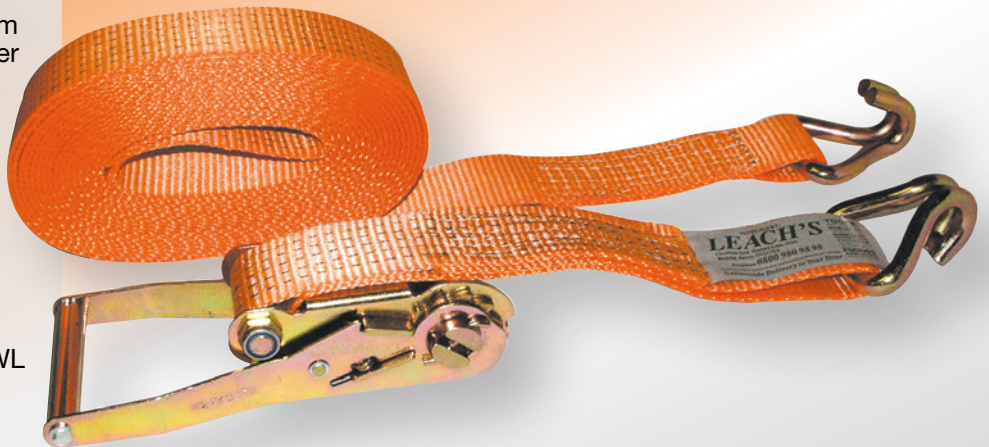

FIRST FOR SAFETY


ADDITIONAL FEATURES




- 1 **Individually Serial Numbered**
for certification purposes.



- 2 **Zinc Plated Steel J-Hook**

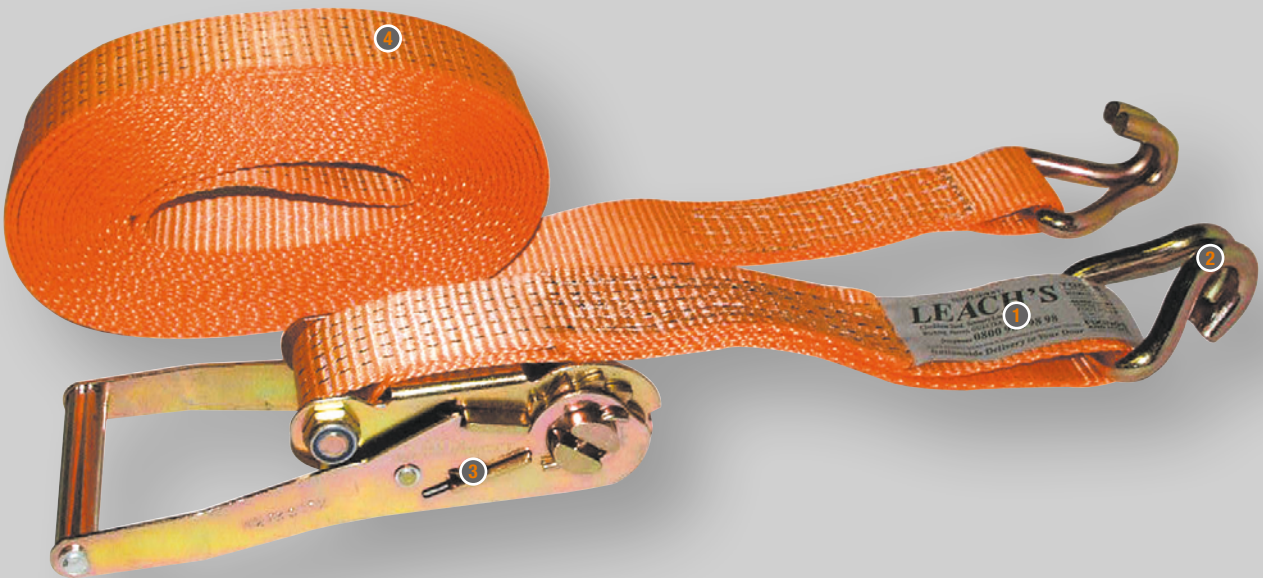

- 3 **Quick Release Mechanism**
to enhance convenience.



- 4 **50mm 100% Polyester Webbing**

FIRST FOR QUALITY

ORDERING INFORMATION

PART NO	MATERIALS		LENGTH	WEBBING WIDTH	SWL	STANDARD	LASHING CAPACITY	RATED ASSEMBLY STRENGTH
	Webbing	J-Hook & Ratchet						
YE-2982	Polyester	Zinc Plated Steel	6m	50mm	4000kg	BS EN 12195-2:2001	2000daN	4000daN
YE-2983	Polyester	Zinc Plated Steel	8m	50mm	4000kg	BS EN 12195-2:2001	2000daN	4000daN
YE-2986	Polyester	Zinc Plated Steel	10m	50mm	4000kg	BS EN 12195-2:2001	2000daN	4000daN


RATCHET SECTION ONLY

PART NO	MATERIALS		LENGTH	WEBBING WIDTH	SWL	STANDARD	LASHING CAPACITY	RATED ASSEMBLY STRENGTH
	Webbing	J-Hook & Ratchet						
YE-2982CL	Polyester	Zinc Plated Steel	-	50mm	4000kg	BS EN 12195-2:2001	2000daN	4000daN

PROTECTIVE SLEEVE

PART NO	MATERIAL	LENGTH
YE-2985	Polyester	300mm

COMPATIBLE PRODUCT

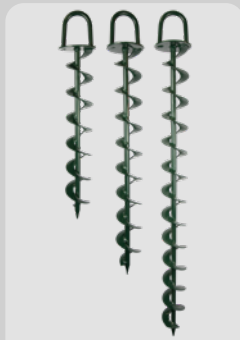

AF-6300

FIRST FOR SOLUTIONS

01432 346800 | sales@leachs.com | www.leachs.com