



# PRODUCT DATA SHEET 03.23



9 | **ENDLESS  
RATCHET STRAP**

---

9 |

---

2 |

## DEFINING FEATURES

### INCLUDES:

- Webbing manufactured from robust and durable polyester
- Quick release mechanism
- Designed for all tow, hoist and tie-down applications.
- Multiple lengths available

### CONFORMITY:

**EN12195-2: 2001**

Tested and approved to a SWL of 1500kg - 3000kg.


### ADDITIONAL FEATURES/ INFORMATION:

The Leach's Endless Ratchet Straps are used worldwide in a wide range of environments including: warehousing, haulage, farming/agriculture, building, construction and scaffolding.



## FIRST FOR SAFETY



## ADDITIONAL FEATURES




- 1 **Individually Serial Numbered**  
for certification purposes.



- 2 **Quick Release Mechanism**  
to enhance convenience.

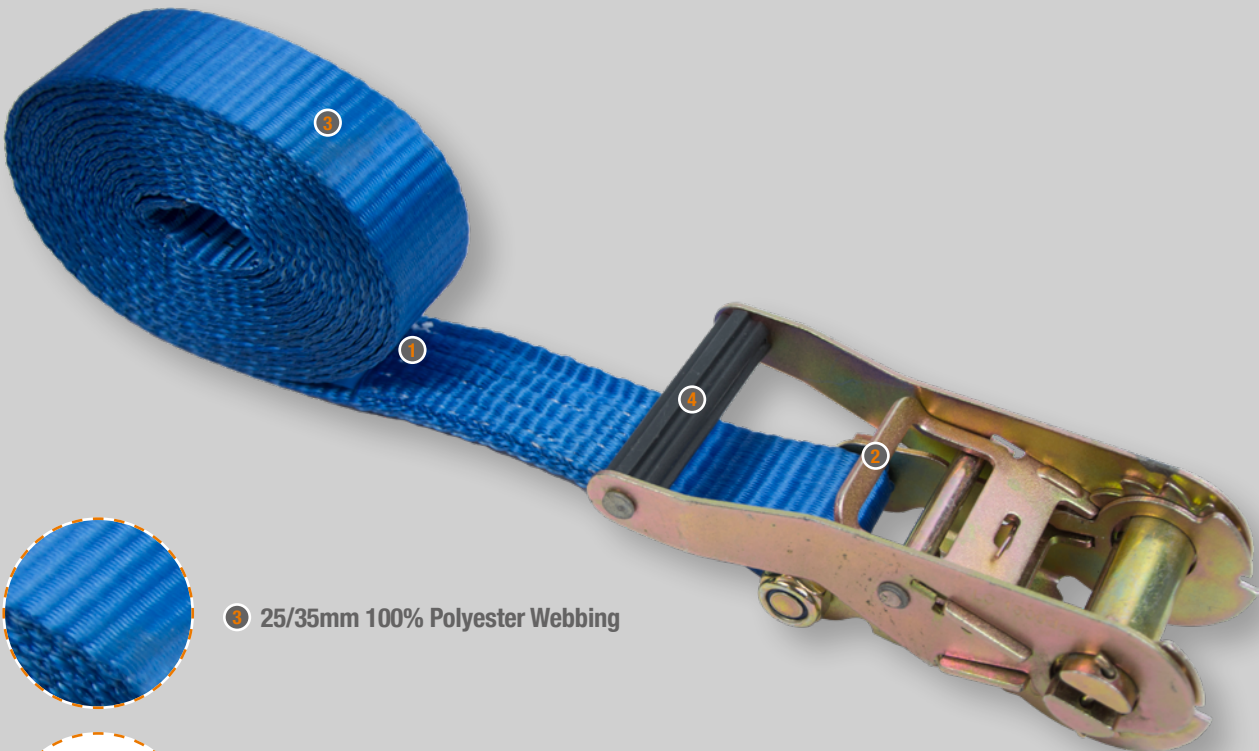

- 3 **25/35mm 100% Polyester Webbing**



- 4 **Plastic Grip**  
for added comfort (35mm only).

---

# FIRST FOR QUALITY

## ORDERING INFORMATION

PART NO	LENGTH	WEBBING WIDTH	MATERIALS		SWL
			Webbing	Ratchet	
YE-2990-4	4m	25mm	Polyester	Zinc Plated Steel	1500kg
YE-2990-6	6m	25mm	Polyester	Zinc Plated Steel	1500kg
YE-2990-8	8m	25mm	Polyester	Zinc Plated Steel	1500kg
YE-2990-10	10m	25mm	Polyester	Zinc Plated Steel	1500kg
YE-2990-12	12m	25mm	Polyester	Zinc Plated Steel	1500kg
YE-2991-4	4m	35mm	Polyester	Zinc Plated Steel	3000kg
YE-2991-6	6m	35mm	Polyester	Zinc Plated Steel	3000kg
YE-2991-8	8m	35mm	Polyester	Zinc Plated Steel	3000kg
YE-2991-10	10m	35mm	Polyester	Zinc Plated Steel	3000kg

## SUITABLE INDUSTRIES



SCAFFOLDING



OIL & GAS



CONSTRUCTION



ROOFING



BRICKWORK




DEMOLITION



TRANSPORTATION

## COMPATIBLE PRODUCT

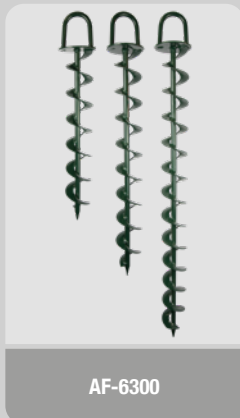

AF-6300

# FIRST FOR SOLUTIONS

01432 346800 | sales@leachs.com | www.leachs.com