

SPECIFICATIONS

Fire Pro® deck monitors were specifically designed to meet all requirements of municipal and petrochemical applications. Monitors are equipped with a vinyl-dipped steering wheel control handle with polished stainless steel connector bracket. The balanced flow single waterway design and precision machining on swivel joints reduces friction loss while improving stream and distance, and ensures ease of operation at all pressure/ flow ranges. Carbon Steel construction with 304 stainless steel swivels. Standard red polyester powder coating inside and out protect against corrosion. Type 304 stainless steel ball bearings in joints ensure easy movement and reliable operation.

FEATURES

- 2.5" Waterway
- Seamless carbon or stainless steel construction
- Zerk fitting for lubrication
- Low friction loss
- 360° horizontal and 120° vertical travel
- 300-1000 GPM (1136-3785 lpm)


OPTIONS

- ☐ Drainage Provisions
- ☐ Gauge and Guard
- ☐ Metric Flanges
- ☐ Parallel Handle
- ☐ Shut Off Valve
- ☐ Shut Off Valve



FP2SD-750 (Shown)

MODEL	INLET In (mm)	OUTLET In (mm)	WEIGHT Lbs (kg)
FP2SD-750	2.5" FLANGE (64)	2.5 NH (64)	47 (21)
FP2SD(F/M)-750	2.5" NPT (64)	2.5 NH (64)	47 (21)
FP3SD-750	3.0" FLANGE (76)	2.5 NH (64)	54 (25)
FP3SD(F/M)-750	3.0" NPT (64)	2.5 NH (64)	54 (25)
FP4SD-750	4.0" FLANGE (102)	2.5 NH (64)	54 (25)

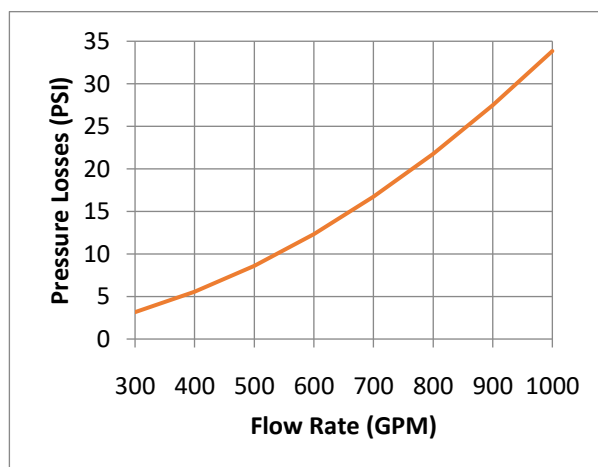

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Call Fire Pro for current listings and approvals. Dimensions are subject to manufacture's tolerance and may change without notice. Fire Pro assumes no responsibility for use of void or superceded data. Please visit www.firepromonitors.com for most current specification.

FP_SD-750

Revised:8/17/20



FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION



CASPE
American Society of
Plumbing Engineers

ONFSA
NATIONAL FIRE SPRINKLER ASSOCIATION, INC.



FIRE PRO

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

MONITORS & NOZZLES

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (866) 961-3473
Dallas (866) 644-3473

www.firepromonitors.com







FIRE MONITORS & NOZZLES
Member of Morris Group International™

2.5" STATION MONITOR

300-1000 GPM

FP_SD-750

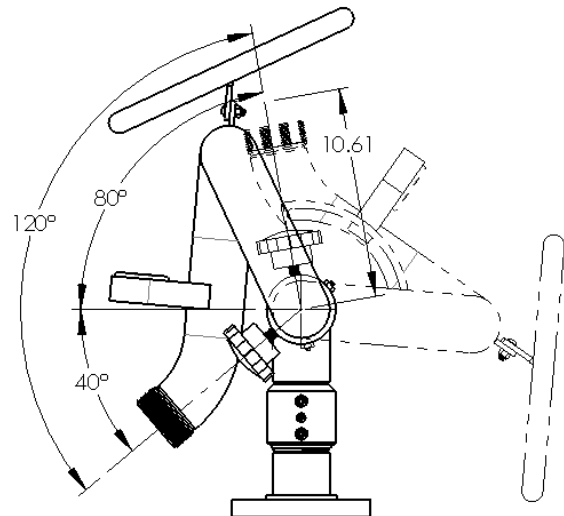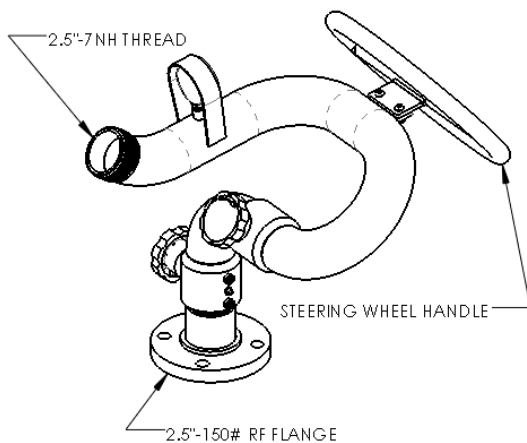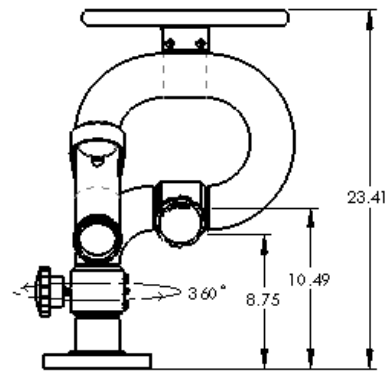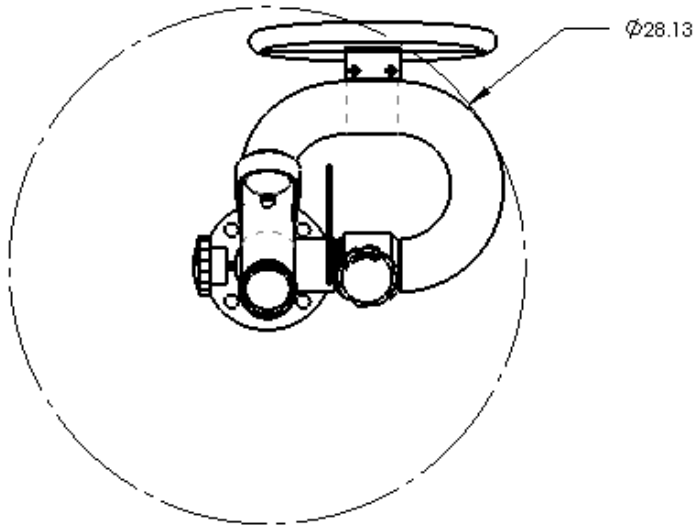

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Call Fire Pro for current listings and approvals. Dimensions are subject to manufacture's tolerance and may change without notice. Fire Pro assumes no responsibility for use of void or superceded data. Please visit www.firepromonitors.com for most current specification.

FP_SD-750

Revised: 8/17/20



FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION



FIRE PRO

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

MONITORS & NOZZLES

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (866) 961-3473
Dallas (866) 644-3473

www.firepromonitors.com