



14201S002

Lo-Cog® DC Motor

Assembly Data	Symbol	Units	Value	
Reference Voltage	E	V	24	
No-Load Speed	S _{NL}	rpm (rad/s)	4,230	(443)
Continuous Torque (Max.) ¹	T _C	oz-in (N-m)	10	(7.1E-02)
Peak Torque (Stall) ²	T _{PK}	oz-in (N-m)	63	(4.4E-01)
Weight	W _M	oz (g)	21	(590)
Motor Data				
Torque Constant	K _T	oz-in/A (N-m/A)	7.44	(5.25E-02)
Back-EMF Constant	K _E	V/krpm (V/rad/s)	5.50	(5.25E-02)
Resistance	R _T	Ω	2.79	
Inductance	L	mH	2.54	
No-Load Current	I _{NL}	A	0.26	
Peak Current (Stall) ²	I _P	A	8.6	
Motor Constant	K _M	oz-in/√W (N-m/√W)	4.45	(3.14E-02)
Friction Torque	T _F	oz-in (N-m)	1.2	(8.5E-03)
Rotor Inertia	J _M	oz-in-s ² (kg-m ²)	1.6E-03	(1.1E-05)
Electrical Time Constant	τ _E	ms	0.91	
Mechanical Time Constant	τ _M	ms	11.4	
Viscous Damping	D	oz-in/krpm (N-m-s)	0.17	(1.1E-05)
Damping Constant	K _D	oz-in/krpm (N-m-s)	15	(9.9E-04)
Maximum Winding Temperature	θ _{MAX}	°F (°C)	311	(155)
Thermal Impedance	R _{TH}	°F/watt (°C/watt)	49.8	(9.90)
Thermal Time Constant	τ _{TH}	min	22.0	
Gearbox Data				
Encoder Data				



Included Features

- 2-Pole Stator
- Ceramic Magnets
- Heavy-Gauge Steel Housing
- 11-Slot Armature
- Silicon Steel Laminations
- Stainless Steel Shaft
- Copper-Graphite Brushes
- Diamond Turned Commutator
- Motor Ball Bearings

Customization Options

- Alternate Winding
- Sleeve or Ball Bearings
- Modified Output Shaft
- Custom Cable Assembly
- Special Brushes
- EMI/RFI Suppression
- Spur or Planetary Gearbox
- Special Lubricant
- Optional Encoder
- Fail-Safe Brake

1 - Specified at max. winding temperature at 25°C ambient without heat sink. 2 - Theoretical values supplied for reference only.

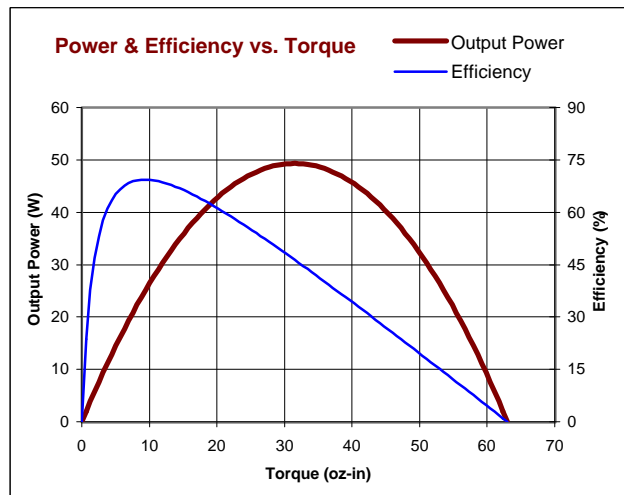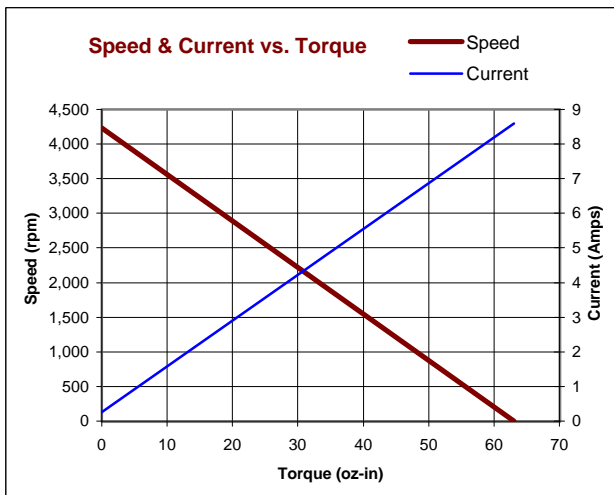


All values are nominal. Specifications subject to change without notice. Graphs are shown for reference only.

© 2001 Pittman.

UNCONTROLLED

NOTICE: CONFIDENTIAL PROPRIETARY INFORMATION THIS PRINT CONTAINS IDEAS, INFORMATION, AND INTELLECTUAL PROPERTY WHICH ARE THE EXCLUSIVE PROPERTY OF PITTMAN, DIVISION OF PENN ENGINEERING & MANUFACTURING CORP. RECIPIENT MUST KEEP THE INFORMATION DISCLOSED HEREIN CONFIDENTIAL AND RECIPIENT IS EXPRESSLY PROHIBITED FROM COPYING OR PUBLICATION OF THIS PRINT EXCEPT TO OTHERS IN THEIR ORGANIZATION ON A NEED-TO-KNOW BASIS

REVISIONS				
LTR	DESCRIPTION	DRFT/ENGR	DATE	APPR
H	REDRAWN	KNJ	6-28-94	JRM
J	UPDATED TO CURRENT OUTLINE STANDARDS	KUH/KUH	8-7-94	JRM
K	REVISED ENDBELL DIMS	KUH/KUH	1-31-96	JRM
L	REVISED ENDBELL DIMS	TMG/DLF		

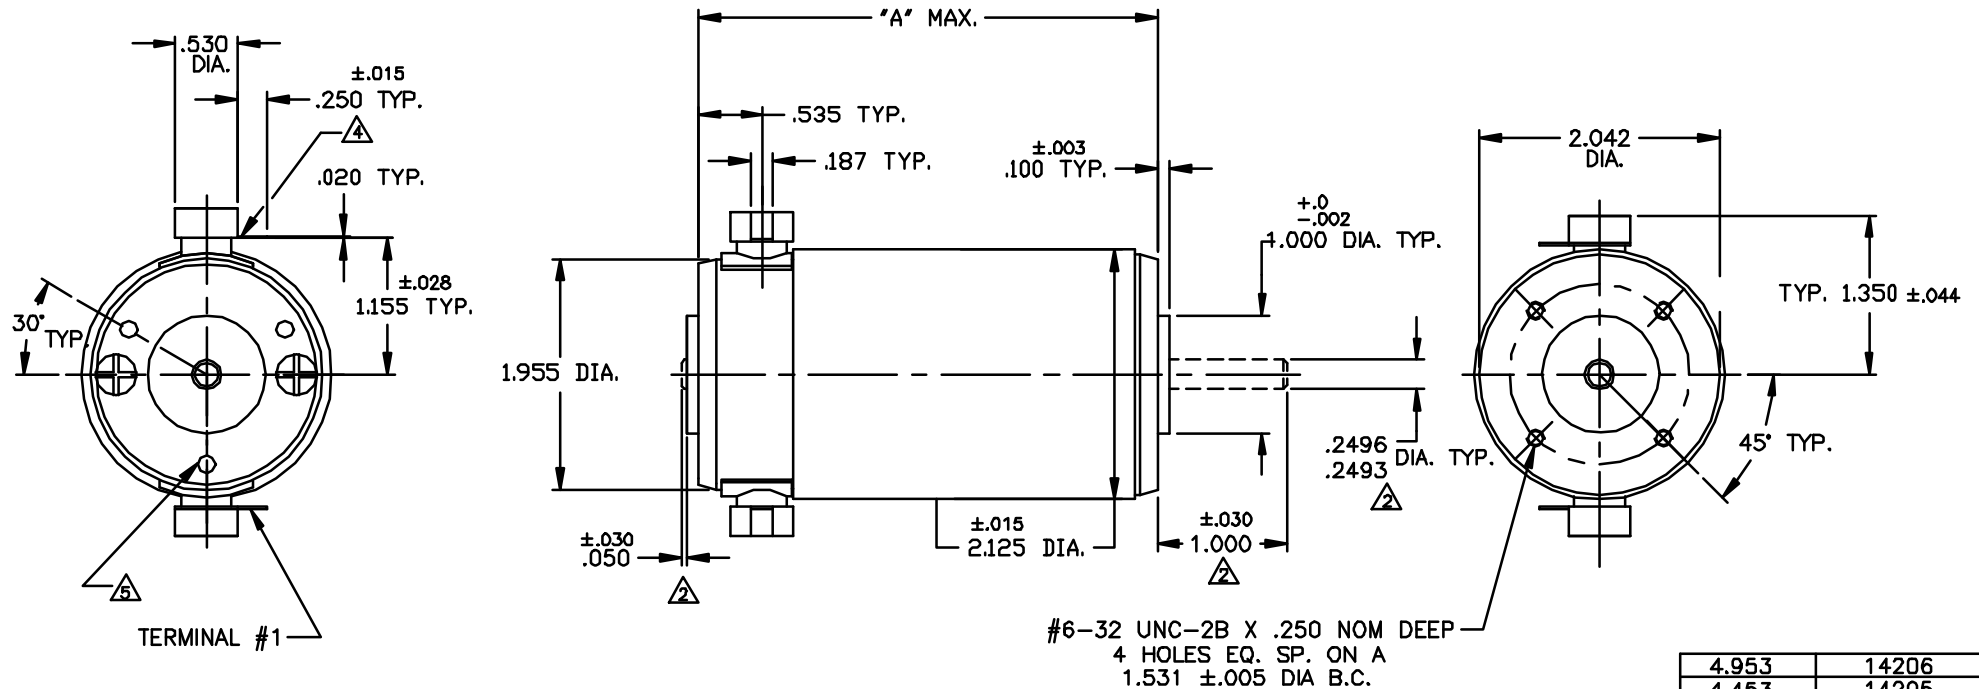

4.953	14206
4.453	14205
4.078	14204
3.703	14203
3.203	14202
2.953	14201
"A" MAX	MODEL NO.

NOTES

- SHAFT ROTATION IS CW, WHILE VIEWING THE MOUNTING END, WITH POSITIVE VOLTAGE (+) APPLIED TO #1 TERMINAL.
- ALL SHAFT DIMENSIONS NOTED ARE STANDARD (11-140-00□). FOR ALL OTHER SHAFT CONFIGURATIONS, REFER TO DATA SHEET FOR SHAFT PART NUMBERS.
- BALL BEARINGS: PRELOAD PER P-107, SLEEVE BEARINGS: .015 MAX ENDPLAY.
- TERMINALS WILL MATE WITH 187 SERIES AMP, INC., OR ETC, INC. PUSH ON RECEPTACLE.
- OPTIONAL REAR MOUNTING HOLES TAPPED #6-32 UNC-2B X .200 NOM DEEP ON A 1.531 DIA B.C., 3 HOLES EQ. SP. AS SHOWN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTION DECIMAL ANGLES ±1/64 .015 .1°		FILE: 150/67		
BREAK ALL SHARP EDGES		DRAFTED BY: KNJ DATE: 25JUN94		
MATERIAL:	FINISH:	ENGINEERED BY: KNJ DATE: 25JUN94	TITLE: OUTLINE AND MOUNTING DIMS FOR 142XX SERIES	
		APPROVED BY: JWM DATE: 25JUN94	DWG. NO. B-150-57	
		NEXT ASSY:	SCALE: DNS SHEET 1 OF 1	
		USED ON:	REV. L	