


DATASHEET

FIREBOZZ MINI

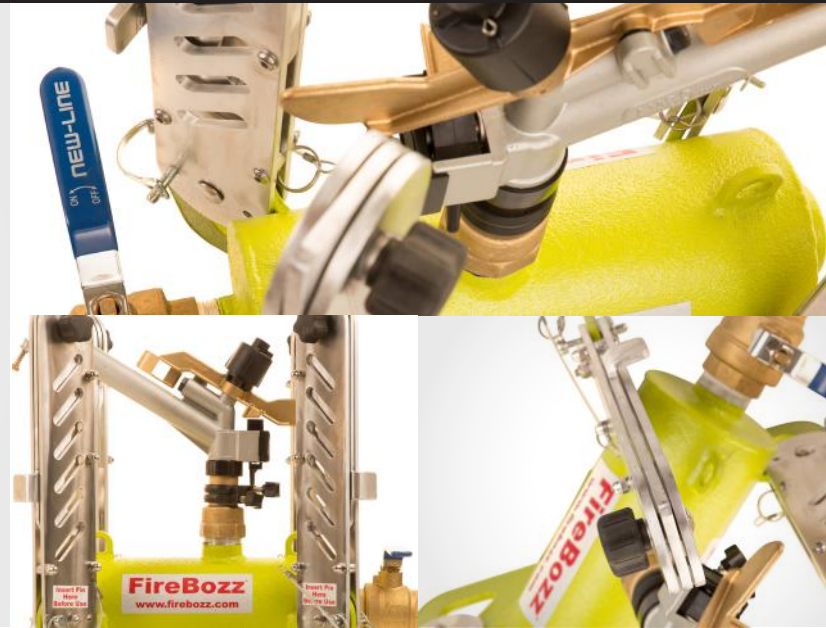

SPECIFICATIONS

DIAMETER OF PROTECTIVE ENVELOPE	Up to 190' (58m)
WATER USAGE	27 - 88 gpm (102 - 333 lpm)
NOZZLE HEAD SIZE	.3", .4", and .5" (8, 10.2, 12.7mm)
INLET / OUTLET	Standard 1.5" (40mm) NPT connector for any adaptor.
WEIGHT	24 lbs (11 kg)
STORAGE DIMENSIONS	18" x 19" x 11" (46cm x 48.5cm x 28cm) / L x H x W

FEATURES

Quick and easy setup on any terrain

Tough, welded stainless and aluminum construction

Does not damage houses located in the interface environment

Multi-purpose water dispersal for emergency, municipal works and resorts

Easy set up and walk-away feature allows operators to get out of harm's way

Broken stream allows maximum conservation of water resources

Loads the air with protective misting envelope to raise relative humidity values over a wide area


Multiple units can be connected for quick, and extremely large, robust wet line

Custom sizes available in both models - contact us for details

NOZZLE → TYPE.31"

PSI (Pounds/inch ²)	GPM (Gallons/Minute)	DISTANCE (Feet Diameter)
35	29	120
40	31	124
50	35	132
60	39	140
70	43	148
80	47	156
90	51	164
100	55	172
110	59	180
120	63	188


Max Coverage: 0.35 ac

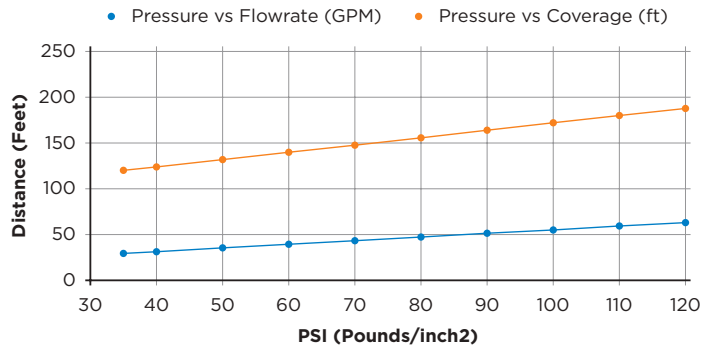

NOZZLE → TYPE.39"

PSI (Pounds/inch ²)	GPM (Gallons/Minute)	DISTANCE (Feet Diameter)
35	39	126
40	41	132
50	46	144
60	51	152
70	55	158
80	60	169
90	64.5	178.5
100	69	187.5
110	74	197
120	78.5	206




Max Coverage: 0.77 ac

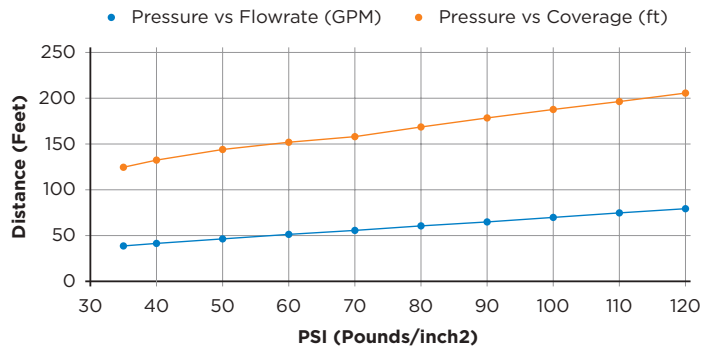

NOZZLE → TYPE.47"

PSI (Pounds/inch ²)	GPM (Gallons/Minute)	DISTANCE (Feet Diameter)
35	50	134
40	54	140
50	60	152
60	66	166
70	71	178
80	77.5	191
90	83.5	203.5
100	89.5	216
110	95.5	229
120	101.5	241.5

Max Coverage: 1.05 ac

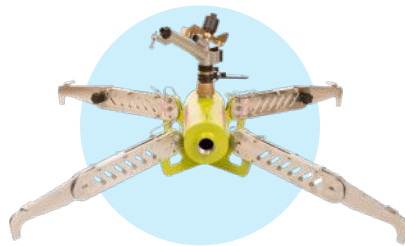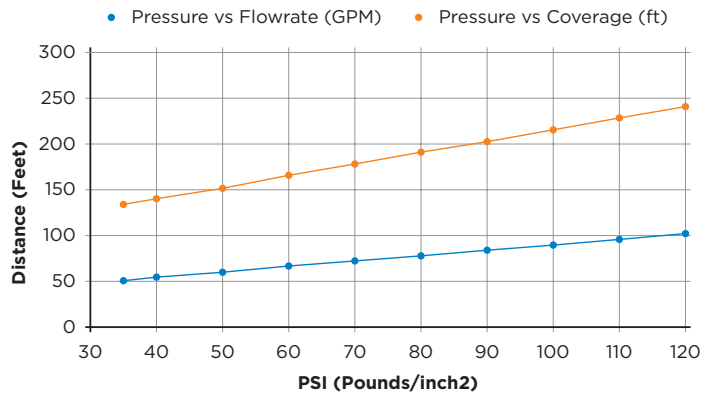

FireBozz Inc.

245 Pine Street, Nanaimo BC, V9R 2B7 Canada
T. 1-250-713-5226 | info@firebozz.com | firebozz.com

firebozz.com/order-online

Shipping to anywhere in North America. Contact us for shipping quotes for other parts of the world.