

Acupanel® Glow: Technical Information



PowerPro 40-24 Transformer

Technical Information

Wattage	40W
Output Voltage	24V
Current	1.6A
Inrush Current	<65A
Power Factor	0.88
IP Rating	IP20
Input Voltage Range	220-240V AC
Dimensions	160 x 58 x 20mm
Max. Case Temperature	85°C
Max. Recommended Load	36W
Warranty	5 Years

PowerPro 75-24 Transformer

Technical Information

Wattage	75W
Output Voltage	24V
Current	3.125A
Inrush Current	65A
Power Factor	0.88
IP Rating	IP20
Input Voltage Range	220-240V AC
Dimensions	170 x 54 x 32mm
Max. Case Temperature	40°C
Max. Recommended Load	68W
Warranty	5 Years

PowerPro 150-24 Transformer


Technical Information

Wattage	150W
Output Voltage	24V
Current	6.25A
Inrush Current	65A
Power Factor	0.91
IP Rating	IP20
Input Voltage Range	220-240V AC
Dimensions	205 x 71 x 35mm
Max. Case Temperature	40°C
Max. Recommended Load	135W
Warranty	5 Years

RM-04 Remote Control

Technical Information

Output Signal	RF(2.4GHz)
Working Voltage	3VDC(CR203 2)
Working Current	<5mA
Standby Current	<10 μ A
Standby Time	1 Year
Remote Distance	30m
Operation Temperature	max. 55°C
Dimensions	156x48x22mm
Certification	CE, EMC, LVD, RED
Battery	CR2032
Warranty	5 Years

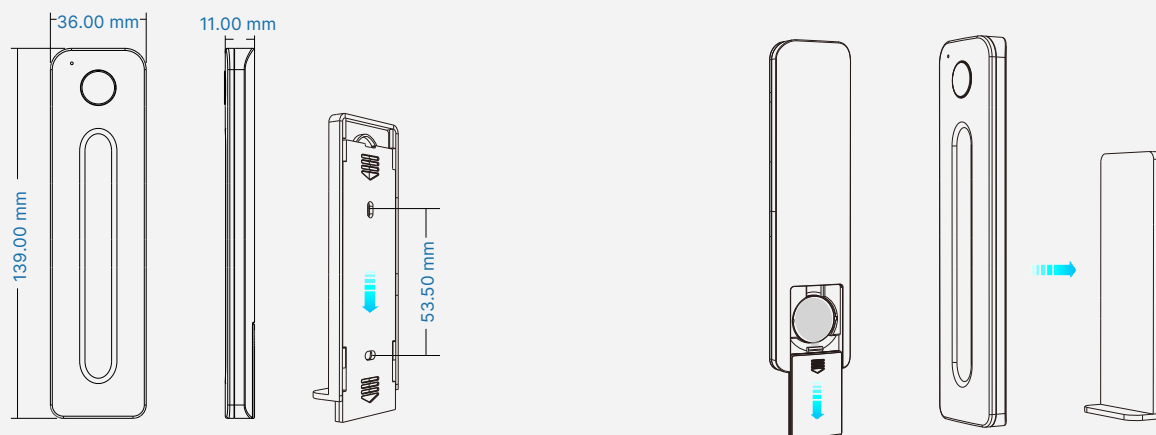

Seamless8

Technical Information

Operating Voltage	24V
Wattage Per Meter	9W
LEDs Per Meter	480
Lumens Per Meter	700
Length	3m
PCB Width	8mm
Cut Points	50mm
Backing Tape	3M 300LSE
CRI	>90
Colour Temperatures	2700K/6000K
IP Rating	20
Beam Angle	120°
Approvals	UKCA/CE
Warranty	5 Years

Smartphone Interface

Technical Information

LED Channels	5
Input Voltage	12-24V DC
Radio Frequency	2.4G
Wi-Fi	Yes
Light on/off Fade	3 Secs
Max. Load	15A
Max. Load per Channel	3A
Dimensions	120x43x35mm
Max. Case Temperature	85°
App Compatibility	Yes
Warranty	5 Years