





WHY ORIENT?

ONE STOP BRAND FOR ELECTRICAL LIFESTYLE SOLUTIONS

Life is hectic. But when it comes to choosing lifestyle appliances, we make it a simple task. For, you just need to rely on one name to find the right kind of appliances for your home. Orient Electric.

A distinguished name in the consumer electrical space for more than 65 years, Orient Electric has established itself as a one-stop provider of fans, lighting, home appliances, switchgears and other electrical solutions.

Speaking of range and presence, we have the widest range of products meeting domestic and international needs with presence in over 40 international markets, and in the domestic market, we have a well-organised distribution network reaching 1,25,000 retail outlets and a strong service network covering more than 450 cities. We have state-of-the-art manufacturing facilities at Faridabad, Noida and Kolkata, which enable us to manufacture consumer-centric, first-to-market products with best-in-class quality and performance.

We take pride in our R&D capabilities, spirit of continuous innovation, and commitment to manufacturing cutting-edge lifestyle electrical solutions. As a trusted brand, our endeavour is not just to adapt but to unravel the latent consumer needs and meet them with apt solutions that make life simpler and experiences better.


Over the years, we have been widely recognised for our product innovations, manufacturing prowess, and excellent customer service. Orient Electric is a consumer validated 'Superbrand.' For, nothing makes us happier than to see a satisfied you.





FELICITATIONS THAT SPUR US ON



















SALIENT FEATURES & BENEFITS OF THE LED TECHNOLOGY



HIGH POWER FACTOR

Power factor more than 0.90



FLICKER CONTROLLED PRODUCTS*



HIGH LIGHT OUTPUT

2 times brighter than conventional light sources of similar wattage



UNIFORM LIGHT DISTRIBUTION



Wi-Fi ENABLED*



RGB LIGHTS*

16 Million Colours













ORISMART LED LAMP

OriSmart LED Lamp gives 16 million colour options to light up your home as per your mood. Now you can control lights from anywhere with Orient Smart App and can operate similar products together.

Details	Orismart LED lamp		
Rated Wattage	10 W		
Lumen	850		
Holder Base	B22d		
Power Factor	>0.9		
Colour Temperature	16million RGB colour		
CRI	>80		
Housing	Thermoplastic		
Protection Class	IP 20		
MRP (₹)	2000		
Std. Pkg.	20		



Rated Wattage	Length (A)	Width (B)
10W	130	74
All dimensions are in mm		





Compatible with Amazon Alexa & Google Home







Operate Similar Lamps Together

APPLICATIONS



ne
















ORISMART LED BATTEN

OriSmart LED Batten helps you adjust your home's light as per your mood. Now you can control lights from anywhere with Orient Smart App and can operate similar products together.

Details	Orismart LED Batten	
Rated Wattage	20 W	
Lumen	2000	
Power Factor	>0.90	
Colour Temperature	3000K – 6500K	
CRI	>80	
Housing	Polycarbonate	
Protection Class	IP 20	
MRP (₹)	2500	
Std. Pkg.	20	

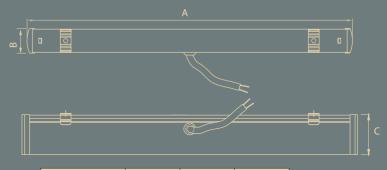

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1185	24	37
All dimensions are in mm			



Operate via Orient Smart App



Compatible with Amazon Alexa & Google Home



3000K to 6500K CCT



Brightness Control: 1-100%



Operate Similar Batten Together

APPLICATIONS



Home



s









FLICKER CONTROLLED LED RANGE

FLICKER IN LED LIGHTS IS NOT VISIBLE. **BUT IT AFFECTS EYE HEALTH.**















EYELUV LED LAMP

EYELUV LED lamp comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV LED Lamp	
Rated Wattage	9W	
Lumen	900	
Power Factor	>0.90	
Colour Temperature	6500K	
CRI	>80	
Protection Class	IP 20	
Beam Angle	>180°	
MRP (₹)	300	
Std. Pkg.	60	



Rated Wattage	Length (A)	Width (B)
9W	112	60
All dimensions are in mm		

IT'S INVISIBLE. BUT HERE'S **HOW TO SEE IT.**






















EYELUV LED BATTEN

EYELUV LED batten comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV LED Batten	
Rated Wattage	20W	
Lumen	2000	
Power Factor	>0.90	
Colour Temperature	6500K	
CRI	>80	
Protection Class	IP 20	
Beam Angle	>120°	
MRP (₹)	700	
Std. Pkg.	20	

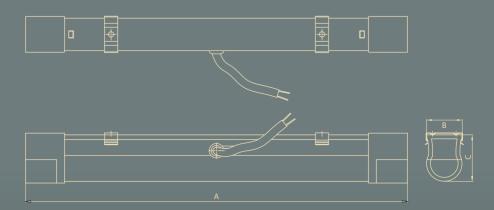

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1100	28	37
All dimensions are in mm			






















EYELUV LED DOWNLIGHTER

EYELUV LED downlighter comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV LED Downlighter	
Rated Wattage	5W	
Shape	Round	
Lumen	450	
Power Factor	>0.90	
Cut-out Size	Ø90mm	
Colour Temperature	6500K / 3000K	
MRP (₹)	500	
Std. Pkg.	20	



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	105	61	90
		All dimensi	ons are in mm
























EYELUV RECESS PANEL-BACKLIT

EYELUV LED panel comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV Recess Panel - Backlit			
Rated Wattage	10W	15W	20W	
Lumen	1000	1500	2000	
Power Factor	>0.90	>0.90	>0.90	
Shape	Square/Round	Square/Round	Square/Round	
Housing	Plastic	Plastic	Plastic	
Cut Out Size	Ø105mm	Ø150mm	Ø205mm	
Colour Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	
CRI	>80	>80	>80	
Protection Class	IP 20	IP 20	IP 20	
MRP (₹)	750	850	1300	
Std. Pkg.	20	20	10	





Rated wattage	Length (A)	Height (B)	Cut-Out (C)
10W	116x116	36	105x105
15W	166x166	36	150x150
20W	220x220	36	205x205
All disconsions are in some			

Rated wattage	Length (A)	Height (B)	Cut-Out (C)
10W	116	36	105
15W	166	36	150
20W	220	36	205
		All dimensi	ons are in mm























EYELUV LED PANEL 2x2

EYELUV LED panel comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV LED Panel 2x2	
Rated Wattage	36W	
Lumen	3600	
Power Factor	>0.90	
Shape	Square	
Housing	CRCA	
Cut Out Size	575x575mm	
Colour Temperature	6500K	
CRI	>80	
Protection Class	IP 20	
MRP (₹)	4000	
Std. Pkg.	4	



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
36W	595x595	36	575x575
		All dimensi	ons are in mm





























EMERGENCY LED LAMP

Emergency LED Lamp gets automatically switched ON during a power cut and runs effectively up to 4 hours. Thus, avoiding any interruptions during power cut.

Details	Emergency LED Lamp	
Rated Wattage	9W	12W
Lumen (AC)	900	1200
Lumen (DC)	350	450
Power Factor	>0.90	>0.90
Colour Temperature	6500K	6500K
CRI	>80	>80
Housing	Thermoplastic	Thermoplastic
Protection Class	IP 20	IP 20
MRP (₹)	950	1150
Std. Pkg.	20	20



Rated Wattage	Length (A)	Width (B)
9W	140	70
12W	140	70
	All dimensi	ons are in mm











Home
















EMERGENCY LED BATTEN

Emergency LED batten gets automatically switched ON during a power cut and runs effectively up to 3 hours. Thus, avoiding any interruptions during power cut.

Details	Emergency LED Batten	
Rated Wattage	10W	20W
Lumen (AC)	1000	2000
Lumen (DC)	350	500
Power Factor	>0.90	>0.90
Colour Temperature	6500K	6500K
CRI	>80	>80
Housing	Polycarbonate	Polycarbonate
Protection Class	IP 20	IP 20
MRP (₹)	500	1000
Std. Pkg.	20	10

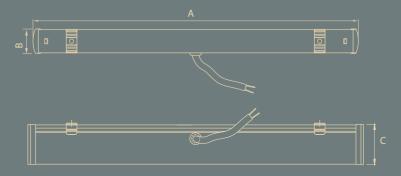

Rated Wattage	Length (A)	Width (B)	Height (C)
10W	598	24	37
20W	1100	24	37
		All dimensi	ons are in mm





Automatic battery charging



Overcharging & deep discharge protection

APPLICATIONS



e





Retail Shops









EMERGENCY LED PANEL

Emergency LED Panel gets automatically switched ON during a power cut and runs effectively up to 4 hours. Thus, avoiding any interruptions during power cut.

Details	Emergency LED Panel
Rated Wattage	10W
Lumen (AC)	900
Lumen (DC)	350
Shape	Round
Power Factor	>0.90
Cut-out Size	105mm
Colour Temperature	6500K
CRI	>80
Housing	Polycarbonate
Protection Class	IP 20
MRP (₹)	1000
Std. Pkg.	20





Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116	36	105
		All dimensi	ons are in mm



Emergency backup upto 4hrs



Automatic battery charging



Overcharging & deep discharge protection

APPLICATIONS



Home



Offices




















DECO SHINE LED - NIGHT LAMP

DECO LED Lamp is the perfect solution to use it as a night lamp, consuming negligible power even if you keep it ON for the whole night.

Details	Deco Shine LED - Night Lamp
Rated Wattage	0.5 W
Housing	Polycarbonate
Protection Class	IP 20
Colour	White, Yellow, Green, Red, Pink, Blue
Base	B22d
MRP (₹)	60
Std. Pkg.	48



Rated Wattage	Length (A)	Width (B)
0.5W	70	45
	All dimension	ons are in mm


















DECO PLUG LED NIGHT LAMP

DECO Plug LED Lamp is the perfect solution as a night lamp, you just need to plug it in your existing 2-pin socket. It consumes negligible power, even if you keep it ON for the whole night.

Details	Deco Plug LED - Night Lamp	
Rated Wattage	0.5W	
Housing	Polycarbonate	
Protection Class	IP 20	
Colours	White, Yellow, Green, Red, Blue & Pink	
MRP (₹)	95	
Std. Pkg.	48	



Rated Wattage	Length (A)	Width (B)	Height (C)
0.5W	68	45	70
		All dimensi	ons are in mm















DECO RAINBOW LED NIGHT LAMP

DECO Rainbow LED Lamp is the perfect solution to decorate your home as it changes colour automatically into seven primary colours and can be used as a night lamp.

Details	Deco Rainbow LED - Night Lamp
Rated Wattage	0.5W
Housing	Polycarbonate
Protection Class	IP 20
Colour Temperature	Auto Colour Changing (7 Primary Colours)
Base	B22d
MRP (₹)	99
Std. Pkg.	48



Violet, Indigo, Blue, Green Yellow, Orange & Red



Rated Wattage	Length (A)	Width (B)
0.5W	70	45
	All dimensi	ons are in mm

















LED LAMP - ETERNAL SHINE (3W-14W)

Eternal shine LED lamps come with an advanced lighting solution that offers more brightness and saves 80% more energy than the traditional incandescent bulbs.

Details	LED Lamp - Eternal Shine					
Rated Wattage	3W	5W	7W	9W	12W	14W
Lumen	300	500	700	900	1200	1400
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
CRI	>80	>80	>80	>80	>80	>80
Protection Class	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Base	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	140	150	160	180	275	325
Std. Pkg.	60	60	60	60	60	60



Rated Wattage	Length (A)	Width (B)
3W	98	51
5W, 7W, 9W	100	56
12W, 14W	123	65
All dimensions are in mm		
























LED LAMP - ETERNAL SHINE (18W - 26W)

High Wattage-LED Lamp comes with an advanced lighting solution that offers more brightness with wider light spread and saves 80% more energy than the traditional incandescent bulbs.

Details	LED Lamp - Eternal Shine		
Rated Wattage	18W	23W	26W
Lumen	1800	2300	2600
Power Factor	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K
CRI	>80	>80	>80
Beam Angle	>240°	>240°	>240°
Protection Class	IP 20	IP 20	IP 20
Base	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	425	600	650
Std. Pkg.	20	20	20



Rated Wattage	Length (A)	Width (B)
18W	155	80
23W/26W	185	95
A III III		






















LED LAMP - ETERNAL SHINE (30W - 60W)

HIGH Wattage-LED Lamp comes with an advanced lighting solution that offers more brightness with wider light spread and saves 80% more energy than the traditional incandescent bulbs.

Details	LED Lamp - Eternal Shine					
Rated Wattage	30W	40W	45W	50W	55W	60W
Lumen	3000	4000	4500	5000	5500	6000
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000k/6500K	6500K
CRI	>80	>80	>80	>80	>80	>80
Beam Angle	>120°	>120°	>120°	>120°	>120°	>120°
Protection Class	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Base	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	700	800	1000	1200	1400	1600
Std. Pkg.	10	10	10	10	10	10



Rated Wattage	Length (A)	Width (B)
30W	184	100
40W/45W	219	120
50W	208	140
55W/60W	250	140
All dimensions are in mm		






















LED LAMP - HIGH GLO

High Glo LED Lamp comes with 180° beam angle which provides more brightness with wider light spread. It complies with BEE 3-Star Rating.

Details	LED Lamp - High Glo			
Rated Wattage	8W	10W	12W	15W
Lumen	840	1050	1260	1575
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
CRI	>80	>80	>80	>80
Beam Angle	180°	180°	180°	180°
Base	B22d/E27	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	175	200	300	350
Std. Pkg.	60	60	60	60



Rated Wattage	Length (A)	Width (B)
8W	112	60
10W	112	60
12W	120	65
15W	125	65
All dimensions are in mm		







High GLO LED Bulb































LED LAMP - HIGH GLO RBP

High Glo RBP LED BULB decorates your home with 3 different colour options – Red, Blue, Pink in the same Bulb. You can change the colour as per your mood with the help of ON-OFF switch.

Details	LED Lamp - High Glo RBP
Rated Wattage	7W
Power Factor	>0.90
Colour Temperature	3 in 1 (Red, Blue & Pink)
Base	B22d/E27
Beam Angle	180°
MRP (₹)	250
Std. Pkg.	25



Rated Wattage	Length (A)	Width (B)
7W	7W 110	
All dimensions are in mm		

























LED LAMP - 3 in 1 (MOODLIGHT)

Moodlight LED Lamp is designed to provide light in 3 different colour options – Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same lamp. You can change the colour as per your mood with the help of ON-OFF switch.

Details	LED Lamp - 3 in 1 (Moodlight)		
Rated Wattage	9W		
Lumen	900		
Power Factor	>0.90		
Colour Temperature	3 in 1 (6500K/4000K/3000K)		
CRI	>80		
Protection Class	IP 20		
Base	B22d		
MRP (₹)	225		
Std. Pkg.	60		



Rated Wattage	Length (A)	Width (B)	
9W	100	56	
All dimensions are in mm			




























LED LAMP - DECORATIVE

Decorative LED Lamp decorates every corner of your home and have multiple usages as in chandelier, table lamp, wall lamps etc. These lamps can be easily fitted in normal (B22) and screw (E27 & E14) holder as per requirement.

Details	LED Lamps - Decorative			
Rated Wattage	2.7W	4.5W		
Lumen	270	450	450	
Power Factor	>0.90 >0.90		>0.90	
Colour Temperature	6500K/3000K	6500K/3000K	6500K/3000K	
CRI	>80	>80	>80	
Protection Class	IP 20	IP20	IP20	
Base	E14	E27/B22d	E27/B22d	
MRP (₹)	250	275	275	
Std. Pkg.	50 50 50			



Rated Wattage	Length (A)	Width (B)	
2.7W Candle Lamp	106	36	
4.5W Candle Lamp	95	50	
4.5W Pigmy Lamp	95	50	
All dimensions are in mm			





















LED LAMP - MULTIPURPOSE (3-STEP DIMMING)

Multipurpose LED Lamp comes with a 3-step dimming function that helps to set the brightness as per your requirement with the help of ON-OFF switch and can be used as night lamp also.

Details	LED Lamp - Multipurpose 15W-8W-0.5W
Rated Wattage	15W
Lumen	1500
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Base	B22d
MRP (₹)	500
Std. Pkg.	20

Different Lighting Modes with 3 Step Dimming




Switch on the buttor once for 15W



Switch OFF & ON again for 8W



Switch OFF & ON again for 0.5W



Rated Wattage	Length (A)	Width (B)	
15W	123	65	
All dimensions are in mm			





Home

















MOTION SENSOR LED LAMP

Motion Sensor LED Lamp switches ON by sensing any movement within a range of 15ft and switches off automatically when no motion is detected for 2 min.

Details	LED Lamp - Motion Sensor
Rated Wattage	10W
Lumen	900
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Base	B22d
MRP (₹)	400
Std. Pkg.	25



Rated Wattage	Length (A)	Width (B)	
10W	123	65	
All dimensions are in mm			



Staus OFF when no movement detected



Auto ON when it Senses any movement within 15 ft range



Auto OFF after 2 minutes if no movement detected













Bathroom














Grace Delite LED Batten offers modern lighting solutions as per your need and is more efficient than traditional fluorescent tube lights, it comes with plastic housing for better aesthetics.

Details	LED Batten - Grace Delite				LED Batten Grace Elite	
Rated Wattage	5W	10W	20W	22W	24W	20W
Lumen	450	1000	2000	2200	2400	2000
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K 6500K	3000K, 4000K 6500K	3000K, 4000K, 6500K Red/Blue/Green	3000K, 4000K 6500K	3000K, 4000K 6500K	3000K, 4000K, 6500K Red/Blue/Green
CRI	>80	>80	>80	>80	>80	>80
Shape	Square	Square	Square	Square	Square	Round
Protection Class	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	300	450	600	650	650	550
Std. Pkg.	20	20	20	20	20	20



Rated wattage	Length (A)	Width (B)	Height (C)	
5W	300	24	37	
10W	600	24	37	
20W - Elite	1100	21	34	
20W	1185	24	37	
22W	1100	24	37	
24W	1185	24	37	
All dimensions are in man				

All dimensions are in mr
























LED BATTEN - SUNLIGHT

Grace Sunlight LED Batten offers modern lighting solutions as per your need and is more efficient than traditional fluorescent tube lights, it comes with aluminium housing for better heat management during long burning hours.

Details	LED Batten - Sunlight			
Rated Wattage	24W	28W	36W	48W
Lumen	2400	2800	4000	5000
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	6500K	6500K	6500K	6500K
CRI	>80	>80	>80	>80
Shape	Square	Square	Square	Square
Protection Class	IP 20	IP 20	IP 20	IP 20
Housing	Aluminium	Aluminium	Aluminium	Aluminium
MRP (₹)	700	800	850	1200
Std. Pkg.	20	20	20	20

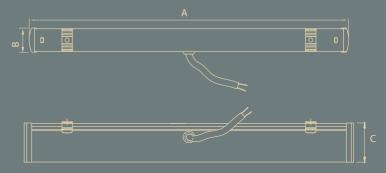

Rated wattage	Length (A)	Width (B)	Height (C)	
24W	1185	24	37	
28W	1185	24	37	
36W	1185	24	37	
48W	1185	32	41	
All dimensions are in mm				





















LED BATTEN - 3 IN1 (GRACE MOODLIGHT)

MoodLight LED Batten is designed to provide light in 3 different colour options – Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same batten. You can change the light colour as per your mood with the help of ON-OFF switch.

Details	LED Batten - 3 in 1 (Grace MoodLight)		
Rated Wattage	20W		
Lumen	2000		
Power Factor	>0.90		
Colour Temperature	3 in 1 (6500K, 4000K, 3000K)		
CRI	>80		
Protection Class	IP 20		
Housing	Polycarbonate		
Shape	Square		
MRP (₹)	650		
Std. Pkg.	20		



	А	
2 0		
<u> </u>		<u></u>
# # # # # # # # # # # # # # # # # # #		c

Rated Wattage	Length (A)	Width (B)	Height (C)	
20W	1135	24	37	
All dimensions are in mm				






















LED BATTEN - NIGHTGLO

NIGHTGLO LED Batten comes with 2 different modes -Reading and Night lamp. You can choose any mode as per your requirement with the help of ON-OFF switch.

Details	LED Batten - Nightglo	
Rated Wattage	20W	
Lumen	2000	
Power Factor	>0.90	
Colour Temperature	6500K	
CRI	>80	
Protection Class	IP 20	
Housing	Polycarbonate	
Shape	Round	
MRP (₹)	700	
Std. Pkg.	20	





Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1135	28	37
All dimensions are in mm			



















SENSOR ENABLED AUTO ON/OFF

LED BATTEN - MOTION SENSOR

Motion Sensor LED Batten switches ON by sensing the movement of a human being with-in a range of 15 feet and switches OFF automatically when no movement is detected within 15 feet, thus saving electricity.

Details	LED Batten - Motion Sensor		
Rated Wattage	20W		
Lumen	2000		
Power Factor	>0.90		
Colour Temperature	6500K		
Protection Class	IP 20		
Housing	Polycarbonate		
CRI	>80		
MRP (₹)	1000		
Std. Pkg.	20		




Stays OFF when no movement detected



Auto ON when it senses any movement within 15ft range



Auto OFF if no movement is detected ofter 17 sec.



Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1135	28	37
All dimensions are in mm			



Staircase













Bathroom







LED BATTEN - 3-STEP DIMMABLE

LED Batten comes with a 3-step dimming feature that helps to set the brightness level to 100%-50% -25% as per your requirement with the help of ON-OFF switch.

Details	LED Batten - 3-Step Dimmable		
Rated Wattage	20W		
Lumen	2000		
Power Factor	>0.90		
Colour Temperature	6500K		
CRI	>80		
Protection Class	IP 20		
Housing	Polycarbonate		
Shape	Square		
MRP (₹)	700		
Std. Pkg.	20		

Different Lighting Modes with 3-Step Dimming




Switch on the button once for 20W



Switch OFF & ON again for 10W



Switch OFF & ON again for 5W

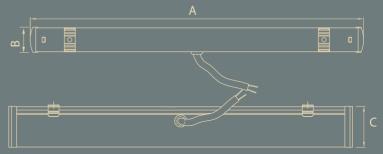

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1185	24	37
All dimensions are in mm			






















LED TUBE - ORILINA

LED tube offers modern lighting solutions as per your need and is 60% more energy efficient than traditional fluorescent light, it is a retrofit solution for old conventional tube.

Details	LED Tube - Orilina
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
Shape	Round
MRP (₹)	800
Std. Pkg.	20



Rated Wattage	Length (A)	Width (B)	
20W	1212	29	
All dimensions are in mm			




















LED RECESS PANEL - METAL

LED Recess Panel – Metal comes with edge lit technology for glare-free/uniform light distribution and is 60% more energy efficient than traditional downlights, it comes with aluminium housing for better heat management during long burning hours.

Details	LED Recess Panel - Metal				
Rated Wattage	3W	6W	12W	18W	24W
Lumen	240	430	880	1600	2100
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
Shape	Square/Round	Square/Round	Square/Round	Square/Round	Square
Cut-out size (mm)	Square-70x70 Round-Ø70	Square-110x110 Round-Ø110	Square-160x160 Round-Ø160	Square-205x205 Round-Ø205	270x270
Housing	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting
MRP (₹)	400	700	900	1400	1800
Std. Pkg.	20	20	20	06	10





Rated wattage	Length (A)	Width (B)	Cut-Out (C)	
3W	85x85	21	70	
6W	120x120	21	110	
12W	170x170	21	160	
18W	225x225	21	205	
24W	300x300	21	270	
	All Processing			

All dimensions are in mm

Rated wattage	Length (A)	Width (B)	Cut-Out (C)
3W	85	21	70
6W	120	21	110
12W	170	21	160
18W	225	25 21 205	
All dimensions are in mm			





















LED RECESS PANEL - PC

LED Recess Panel – Polycarbonate comes with edge lit technology for glare-free/uniform light distribution and is 60% more energy efficient than traditional downlights, it comes with sleek housing for better aesthetics.

Details	LED Recess Panel - Polycarbonate				
Rated Wattage	3W	6W	12W	15W	18W
Lumen	225	450	1080	1200	1620
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
Shape	Square/Round	Square/Round	Square/Round	Square/Round	Square/Round
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Cut-out size (mm)	Square-70x70 Round- Ø70	Square-110x110 Round- Ø110	Square-160x160 Round- Ø160	Square-160x160 Round- Ø160	Square-205x205 Round- Ø205
MRP (₹)	350	550	750	800	950
Std. Pkg.	20	20	20	20	10











Rated wattage	Length (A)	Width (B)	Cut-Out (C)	
3W	80x80	24	70x70	
6W	120x120	24	110x110	
12W/15W	170x170	24	155x155	
18W	220x220	24	205x205	
All dimensions are in mm				

A II	dimonci		

Rated wattage	Length (A)	Width (B)	Cut-Out (C)	
3W	80	24	70	
6W	120	24	110	
12W/15W	170	24	155	
18W	220	24	205	
All dimensions are in mm				























LED RECESS PANEL - BACKLIT

These panels come with backlit LED technology that offers higher brightness and saves 80% more energy than traditional downlights.

Details	LED Recess Panel - Backlit				
Rated Wattage	10W	12W	15W	20W	
Lumen	900	1200	1500	2000	
Power Factor	>0.90	>0.90	>0.90	>0.90	
Colour Temperature	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	
Shape	Square/Round	Square/Round	Square/Round	Square/Round	
Cut-out size (mm)	Square-105X105 Round-Ø105mm	Square-130x130 Round-Ø130mm	Square-150x150 Round-Ø150mm	Square-205x205 Round-Ø205mm	
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	
MRP (₹)	700	750	800	1200	
Std. Pkg.	20	20	20	10	







		_		
- ₽			⊣ [i	B
4			┷,	

Rated wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116x116	36	105x105
12W	144x144	36	130x130
15W	166x166	36	150x150
20W	220x220	36	205x205
All dimensions are in mm			

Rated wattage	Length (A)	Width (B)	Cut-Out (C)	
10W	116	36	105	
12W	144	36	130	
15W	166	36	150	
20W	220	36	205	
All dimensions are in mm				













Shopping Complexes








LED RECESS PANEL-3 in 1 (MOODLIGHT)

MoodLight LED panel is designed to provide light in 3 different colour options – Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same panel. You can change the light colour as per your mood with the help of ON-OFF switch.

Details	LED Recess Panel - 3 in 1 (Moodlight)			
Rated Wattage	10W	15W		
Lumen	1000	1500		
Power Factor	>0.90	>0.90		
Colour Temperature	3 in 1 (6500K, 4000K, 3000K)	3 in 1 (6500K, 4000K, 3000K)		
Shape	Square/Round	Square/Round		
Cut-out size (mm)	Square - 105X105 Round - Ø105mm	Square - 150x150 Round - Ø150mm		
Housing	Polycarbonate	Polycarbonate		
MRP (₹)	1000	1200		
Std. Pkg.	20	20		

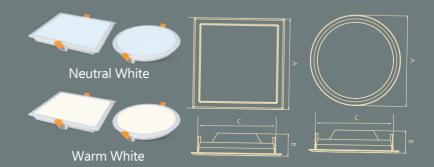

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)	Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116x116	36	105x105	10W	116	36	105
15W	166x166	36	150x150	15W	166	36	150
		All dimensi	ons are in mm	All dimensions are in mm			




















Different Lighting Modes with 3-Step Dimming



Switch on the button once for 20W



Switch OFF & ON again for 10W




Switch OFF & ON again for 5W

LED RECESS PANEL - 3-STEP DIMMABLE

Backlit dimmable panel comes with a 3-step dimming feature that helps to set the brightness level to 100%-50% -25% as per your requirement with the help of ON-OFF switch.

Details	LED Recess Panel - 3 Step Dimmable
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6000K
Shape	Square/Round
Cut-out size (mm)	Square- 205x205 Round- Ø205mm
Housing	Polycarbonate
MRP (₹)	1500
Std. Pkg.	10



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
20W	220	36	205
All dimensions are in mm			

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
20W	220x220	36	205x205
All dimensions are in mm			





Offices






















LED SURFACE PANEL - METAL

LED Surface Panel provides the best lighting conditions for your ceiling. It comes with aluminium housing for better heat management during long burning hours.

Details	LED Surface Panel - Metal			
Rated Wattage	6W	12W	18W	
Lumen	430	880	1600	
Shape	Square/Round	Square/Round	Square/Round	
Power Factor	>0.90	>0.90	>0.90	
Colour Temperature	3000K, 6000K	3000K, 6000K	3000K, 6000K	
Housing	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting	
MRP (₹)	800	1000	1400	
Std. Pkg.	20	20	06	







	\circ	
	U	
_		

Rated Wattage	Length (A)	Height (B)
6W	80x80	38
12W	126x126	38
18W	175x175	38
All dimensions are in mm		

Rated Wattage	Length (A)	Height (B)
6W	80	38
12W	126	38
18W	175	38
All dimensions are in mm		



















LED SURFACE PANEL - FULL SCREEN

Full Screen surface Panel comes with rimless diffusor that offers better light distribution. Besides, these panels are highly durable, offers better heat dissipation and are easy to install.

Details	LED Surface Panel - Full Screen			
Rated Wattage	6W	12W	18W	24W
Lumen	510	990	1480	1980
Shape	Square/Round	Square/Round	Square/Round	Square/Round
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 6000K	3000K, 6000K	3000K, 6000K	3000K, 6000K
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	800	1000	1400	1800
Std. Pkg.	20	20	20	10







Rated Wattage	Length (A)	Height (B)
6W	91	27
12W	131	27
18W	156	27
24W	190	27
All dimensions are in mm		


















LED SURFACE PANEL - STRIKER

Light up your compact spaces like modular kitchen, wardrobes, showcases etc. with this slim and easy to install LED panel.

Details	LED Surface Panel - Striker		
Rated Wattage	3W	6W	
Lumen	200	400	
Shape	Round	Round	
Power Factor	>0.90	>0.90	
Colour Temperature	6500K, 3000K, Red, Blue, Green, Pink	6500K, 3000K, Red, Blue, Green, Pink	
Housing	Polycarbonate	Polycarbonate	
MRP (₹)	200	400	
Std. Pkg.	50	50	



Rated Wattage	Length (A)	Height (C)	Mounting Hole (B)
3W	60	16	45
6W	90	16	75
All dimensions are in mm			























(CK BIRLA GROUP






LED DOWNLIGHTER - MOON LITE

Moon lite gives elegant look to your home / office. Perfect solution to fix in 3 inches junction box.

Details	LED Downlighter - Moon Lite		
Rated Wattage	5W	9W	
Lumen	450	765	
Shape	Round	Round	
Cut-out size (mm)	Ø75mm	Ø90mm	
Power Factor	>0.90	>0.90	
Colour Temperature	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink	
Housing	Polycarbonate	Polycarbonate	
MRP (₹)	400	450	
Std. Pkg.	20	20	



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	112	47	75
9W	105	61	90
All dimensions are in mm			

























LED DOWNLIGHTER - MOON LITE (MINI)

Moon lite mini gives elegant look to your home / office. Perfect solution to fix in 2 inches junction box.

Details	LED Downlighter - Moon Lite (Mini)	
Rated Wattage	3W	
Lumen	240	
Shape	Round	
Cut-out size (mm)	Ø48mm	
Power Factor	>0.90	
Colour Temperature	6500K, 3000K, Red, Blue, Green and Pink	
Housing	Polycarbonate	
MRP (₹)	200	
Std. Pkg.	50	





Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
3W	81	35	50
All dimensions are in mm			
















LED DOWNLIGHTER - 3 in 1 (MOOD LIGHT)

Mood Light LED downlighter is designed to provide light in 3 different colour options – Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same downlighter. You can change the light colour as per your mood with the help of ON-OFF switch

Details	LED Downlighter - 3 in 1 (Mood Light)
Rated Wattage	5W
Lumen	450
Shape	Round
Power Factor	>0.90
Cut-out Size	Ø90mm
Colour Temperature	3 in 1 (6500K/3000K/4000K)
MRP (₹)	500
Std. Pkg.	20



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	105	61	90
All dimensions are in mm			





Pacidancas



Showrooms









Educational Institutes








LED DOWNLIGHTER - MULTICOLOUR

Multicolour LED downlighter is designed to provide light in 3 different colour options –RED, BLUE, PINK in the same downlighter. You can change the colour as per your mood with the help of ON-OFF switch.

Details	LED Downlighter - Multicolour	
Rated Wattage	5W	
Shape	Round	
Power Factor	>0.90	
Cut-out Size	Ø90mm	
Colour Temperature	3 in 1 (Red, Blue & Pink)	
MRP (₹)	500	
Std. Pkg.	20	



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	105	61	90
All dimensions are in mm			


















LED DOWNLIGHTER - MOON LITE DEEP

LED Deep downlighter comes with rimless diffusor that offers better light distribution and easy to install in deep junction box with same cut-out for different wattage options.

Details	LED Donwlighter - Moon Lite Deep			
Rated Wattage	6W	9W	12W	15W
Lumen	600	900	1200	1500
Shape	Round	Round	Round	Round
Cut-out size (mm)	Ø48mm	Ø48mm	Ø48mm	Ø48mm
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	6500K, 3000K, Red, Blue, Green & Pink			
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	450	550	650	750
Std. Pkg.	20	20	20	20



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
6W/9W	82	64	48
12W/15W	141	66	48
All dimensions are in mm			

















LED RECESS DOWNLIGHTER - RAINBOW

Rainbow Recess LED Downlighter is available in 4 colour combinations (White + Blue, White + RED, White + Pink, White + Green), you can change the colour as per your need by ON-OFF Switch.

Details	LED Recess Downlighter - Rainbow		
Rated Wattage	6W	12W	
Lumen	600	1200	
Shape	Round	Round	
Power Factor	>0.9	>0.9	
Cut-out Dia.	Ø48mm	Ø48mm	
Colour Temperature	6500K+Blue, 6500K+RED, 6500K+Pink, 6500K+Green	6500K+Blue, 6500K+RED, 6500K+Pink, 6500K+Green	
MRP (₹)	600	1000	
Std Pkg.	20	20	




Pink



Red



Green



Rated Wattage	Length (A)	Height (B)	Cutout (C)
6W	88	42	48
12W	118	42	48

APPLICATIONS











All dimensions are in mm











LED SURFACE DOWNLIGHTER - RAINBOW

Rainbow Surface LED Downlighter is available in 4 colour combinations (White + Blue, White + RED, White + Pink, White + Green), you can change the colour as per your need by ON-OFF Switch.

Details	LED Surface Downlighter - Rainbow		
Rated Wattage	6W 12W		
Lumen	600	1200	
Shape	Round	Round	
Power Factor	>0.9	>0.9	
Colour Temperature	6500K+Blue, 6500K+RED 6500K+Pink, 6500+Green	6500K+Blue, 6500K+RED 6500K+Pink, 6500+Green	
MRP (₹)	650/-	1100/-	
Std Pkg.	20	20	




Pink



Red







Green

Rated Wattage	Length (A)	Height (B)	Mounting (C)
6W	86	44	48
12W	140	44	48
All dimensions are in mm			





Showrooms























LED SPOT LIGHT - VIVID (2W)

LED Spotlights are designed to highlight special corners of your homes and offices to make it more lively. These lights are your perfect modern lighting options.

Details	LED Spot Light - Vivid	
Rated Wattage	2W	
Lumen	100	
Shape	Round	
Cut-out size (mm)	Ø32mm	
Power Factor	>0.90	
Colour Temperature	3000K, 6500K, Red, Blue, Green & Pink	
CRI	>80	
Protection Class	IP 20	
Housing	Polycarbonate	
MRP (₹)	200	
Std. Pkg.	100	



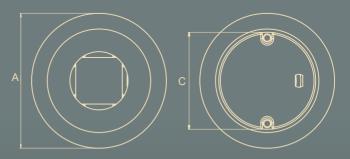

Rated Wattage	Dia (A)	Height (B)	Cut-Out (C)
2W	42	14	32
All dimensions are in mm			























LED SPOT LIGHT - VIVID (3W)

LED Spotlights are designed to highlight special corners of your homes and offices to make it more lively. These lights are your perfect modern lighting options, it can be fixed in 2 inches junction box.

Details	LED Spot Light- Vivid	
Rated Wattage	3W	
Lumen	180	
Power Factor	>0.90	
Cut-out Size	Ø50mm	
Colour Temperature	3000K, 6500K Red, Blue, Pink & Green	
CRI	>80	
Protection Class	IP 20	
Housing	Polycarbonate	
MRP (₹)	200	
Std. Pkg.	50	





Rated Wattage	Dia (A)	Height (B)	Cut-Out (C)	
3W	75	27	50	
All dimensions are in mm				



















LED COB SPOT LIGHT

LED COB spot light has a unique narrow beam-angle light distribution, slim design that makes it perfect to fix in small height ceiling. It comes with plastic housing for better aesthetics

Details	LED COB Spot Light				
Rated Wattage	3W	6W	9W	12W	
Lumen	240	510	765	1020	
Shape	Round	Round	Round	Round	
Cut-out size (mm)	Ø52mm	Ø68mm	Ø90mm	Ø115mm	
Power Factor	>0.90	>0.90	>0.90	>0.90	
Colour Temperature	6500K, 4000K, 3000K	6500K, 4000K, 3000K	6500K, 4000K, 3000K	6500K, 4000K, 3000K	
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	
Beam Angle	40°	40°	40°	40°	
Swivel Arrangement	50°	50°	50°	50°	
MRP (₹)	450	600	750	1000	
Std. Pkg.	20	20	20	20	





Rated wattage	Dia (A)	Height (B)	Cut-Out (C)	
3W	75	43	52	
6W	95	46	68	
9W	117	55	90	
12W	140	55	115	
All dimensions are in mm				





Jewelers



Showrooms

















LED COB DOWNLIGHTER - DEEP

LED COB Downlighter has a unique narrow beam-angle light distribution, slim design that makes it perfect to fix in small height ceiling. It comes with aluminium housing for better heat management during long burning hours.

Details	LED COB Downlighter - Deep					
Rated Wattage	3W	6W	9W	15W	18W	24W
Lumen	210	511	750	1200	1500	1920
Shape	Round	Round	Round	Round	Round	Round
Cut-out size	Ø55mm	Ø68mm	Ø68mm	Ø89mm	Ø111mm	Ø111mm
Power factor	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
Colour Temperature	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K
Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Beam Angle	30°	30°	30°	30°	30°	30°
Swivel Arrangement	Upto 60°	Upto 60°	Upto 60°	Upto 60°	Upto 60°	Upto 60°
MRP (₹)	600	800	1000	1500	1800	2500
Std. Pkg.	20	20	20	20	10	10

Rated wattage	Dia (A)	Height (B)	Cut-Out (C)	
3W	67	53.5	55	
6W	85.5	60	68	
9W	85.5	85	68	
15W	107.5	95.5	89	
18W	137.5	87	111	
24W	137.5	116.5	111	
All dimensions are in mm				









Jewelers



Showrooms



Shelf Lighting



Art Galleries



Corporate Offices







LED COB TRACK LIGHT

LED COB Track light has a unique narrow beam-angle light distribution. It comes with aluminium housing for better heat management during long burning hours.

Details	LED COB Track Light			
Rated Wattage	15W	20W	30W	
Lumen	1200	1500	2400	
Shape	Round	Round	Round	
Power Factor	>0.90	>0.90	>0.90	
Colour Temperature	3000K, 6000K	3000K, 6000K	3000K, 6000K	
Housing	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting	
Beam Angle	38°	38°	38°	
MRP (₹)	1200	1800	2200	
Std. Pkg.	20	20	20	



Rated wattage	Length (A)	Width (B)	Dia (C)	Height (D)
15W	158	103	73	128
20W	158	122	73	135
30W	182	143	87	168
All dimensions are in mm				
























LED SURFACE TRACK LIGHT

LED Surface Track light has a unique narrow beam-angle (38°) light distribution. It comes with aluminium housing for better heat management during long burning hours.

Details	LED Surface Track Light				
Rated Wattage	7W	10W	15W	20W	30W
Lumen	600	800	1200	1600	2400
Shape	Round	Round	Round	Round	Round
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K
Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Beam Angle	38°	38°	38°	38°	38°
MRP (₹)	1000	1050	1300	2000	2500
Std. Pkg.	20	20	20	20	20

Rated wattage	Length (A)	Width (B)	Dia (C)	Height (D)
7W	100	65	46	95
10W	100	82	46	95
15W	140	82	73	135
20W	140	122	73	135
30W	167	143	87	157
All dimensions are in mm				
























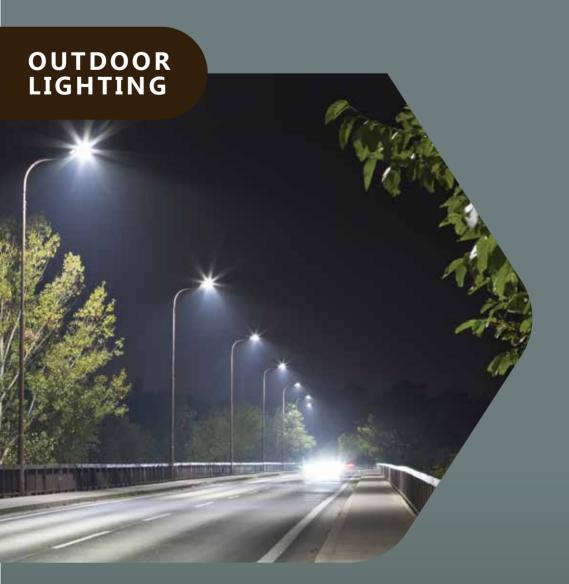









LED STREET LIGHT

LED Street Light provides better lighting, saves up to 80% more energy than HPS/MH streetlights and are perfect for parks, campuses etc.

Details	LED Street Light				
Rated Wattage	20W	24W	30W	40W	70W
Lumen	2200	2400	3300	4400	7700
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
Colour Temperature	6500K	6500K	6500K	6500K	6500K
Protection Class	IP 65	IP 65	IP 65	IP 65	IP 65
MRP (₹)	2200	3000	3000	4500	5500
Std. Pkg.	8	8	8	8	4





Rated wattage	Length (A)	Width (B)	Height (C)
20W/24W	246	103	85
30W/40W	255	118	85
70W	302	163	107

All dimensions are in mm

APPLICATIONS



ı












LED FLOOD LIGHT (10W - 50W)

LED Flood light is perfect solution for area lighting such as stadiums, outdoor weddings façade lighting etc. LED Flood Lights is slimmer in design and gives permium aesthetics look

Details	LED Flood Light (10W - 50W)				
Rated Wattage	10W	20W	30W	50W	
Lumen	1000	2000	3000	5000	
Power Factor	>0.9	>0.9	>0.9	>0.9	
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	
Housing	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting	
Protection Class	IP 65	IP 65	IP 65	IP 65	
MRP (₹)	1500	2500	3500	4500	
Std. Pkg.	40	20	10	04	



Rated wattage	Length (A)	Width (B)	Height (C)
10W	115	90	29.5
20W	145	110	33.5
30W	185	135	36
50W	205	165	42
		All dimensi	ons are in mm


















LED FLOOD LIGHT (70W - 200W)

LED Flood light is perfect solution for area lighting such as stadiums, outdoor weddings façade lighting etc. LED Flood Lights is slimmer in design and gives permium aesthetics look

Details	LED Flood Light (70W - 200W)				
Rated Wattage	70W	100W	150W	200W	
Lumen	7000	10000	13500	18000	
Power Factor	>0.9	>0.9	>0.9	>0.9	
Colour Temperature	3000K, 6500K	3000K, 6500K	3000K, 6500K	3000K, 6500K	
Housing	Alumunium Die casting	Alumunium Die casting	Alumunium Die casting	Alumunium Die casting	
Protection Class	IP 65	IP 65	IP 65	IP 65	
MRP (₹)	5500	7000	10000	14000	
Std. Pkg.	10	04	05	04	



Rated wattage	Length (A)	Width (B)	Height (C)
70W	229	165	40
100W	285	220	48
150W	340	250	55
200W	400	300	55
		All dimensi	ons are in mm
















LED BULKHEAD

LED Bulkhead is easy to install indoor as well as outdoor and gives your home and office space a lively look. It comes with IP65 protection.

Details	LED Bulkhead		
Rated Wattage	5W	12W	
Lumen	450	1080	
Power Factor	>0.90	>0.90	
Colour Temperature	6500K/3000K	6500K/3000K	
Housing	Polycarbonate	Polycarbonate	
IP Class	IP 65	IP 65	
MRP (₹)	350	700	
Std. Pkg.	50	50	



Rated Wattage	Length (A)	Width (B)	Height (C)
5W	117	44	61
12W	165	85	65
		All dimensi	ons are in mm





















LED STRIP LIGHT

LED Strip Lights offer a variety of lighting colours and effects to decorate your home Thus, making them suitable for the Cove lighting.

Details	LED Strip Light		
Rated Wattage	24W	24W	48W
Lumen	2500	2000	3500
Protection Class	IP 20	IP 65	IP 20
Colour Temperature	6500K, 3000K, Red/Blue/Green/Pink	6500K, 3000K, Blue	6500K, 3000K,
Length	5 meters	5 meters	5 meters
MRP (₹)	800	1000	1000
Std. Pkg.	50	50	50

APPLICATIONS



Cove Lighting



Showrooms



Decoration Lighting



Malls







LED FESTIVAL STRING LIGHT - LADI

LED Ladi offers a variety of lighting colours for home decoration during festival and special occasions.

Details	Joylite Garland String Light	Joylite Diamond String Light
Rated Wattage	3W	3W
LED Diameter	5mm	5mm/8mm
Protection Class	IP 20	IP 20
Colour Temperature	White/Warm white/Red/ Blue/Green/Pink	RG, RB
Length	10 meters	10 meters
MRP (₹)	450	600
Std. Pkg.	96	96





Festival Lighting



Wedding & Birthday Decoration



Showroom




Mall





ACCESSORIES



SURFACE MOUNTING RING FOR LED RECESS PANELS

LED Surface mounting rings offer to convert your LED Recess Panel Light to Surface Panels that can be directly mounted on the ceiling.

Details	Surface Mounting Ring for LED Recess Panels					
Rated Wattage	6W	12W	18W	10W	15W	20W
Shape	Round/Square			Round/Square		
Housing	Polycarbonate			Po	lycarbona	te
MRP (₹)	250	300	400	150	200	250
Std. Pkg.	20	20	20	20	20	20



LED DRIVER

LED driver provides the 12V DC output voltage and is suitable to operate 12V DC devices like strip light, modules etc.

Details	24W, 12V/2A	60W, 12V/5A
Rated Wattage	24W	60W
Output Voltage	12V	12V
Output Cuttent (Max.)	2A	5A
Housing	Polycarbonate	Polycarbonate
Design	CV	CV
MRP (₹)	300	700
Std. Pkg.	30	30

APPLICATIONS

• LED Drivers provide 12V DC output voltage and is suitable to operate devices like strip, modules etc.





Notes		





BRANCH OFFICES

NORTH		
Delhi	9654980990	Raj.kumar@orientelectric.com
Ghaziabad	9643433824	deep.rastogi@orientelectric.com
Faridabad	7838550671	munish.kumar@orientelectric.com
Chandigarh	9216478812	sanjeev.talwar@orientelectric.com
Jammu	9216478812	sanjeev.talwar@orientelectric.com
Jaipur	9830600966	biplab.das@orientelectric.com
Lucknow	9554499666	ravi.kumar2@orientelectric.com
Rishikesh	8859014147	dinesh.chandra@orientelectric.com
WEST		
Mumbai	7045779958	Sanjay.shelar@orientelectic.com
Pune	9930511225	ajay.singh@orientelectric.com
Indore	7566201004	sunil.nahatkar@orientelectric.com
Nagpur	9826470988	sandeep.mishra@orientelectric.com
Raipur	9977002729	satyam.dwivedi@orientelectric.com
Ahmedabad	7948906707	anand.deogharia@orientelectric.com
SOUTH		
Bengaluru	9845229798	ananda.kumar@orientelectric.com
Chennai	9655467776	c.gopi@orientelectric.com
Madurai	9994457638	bsenthil.kumar@orientelectric.com
Secunderabad	9052899799	naveen.katta@orientelectric.com
Cochin	9745048800	madhu.s@orientelectric.com
Vijaywada	9642325967	n.srinivasan@orientelectric.com
EAST		
Kolkata	9836643443	prabal.basu@orientelectric.com
Cuttack	9439157701	sudhansu.panigrahi@orientelectric.com
Patna	9934588650	abhay.kumar@orientelectric.com
Ranchi	9934545042	vikash.jaiswal@orientelectric.com
Guwahati	9435142707	ashis.dey@orientelectric.comt
		<u> </u>





CONSUMER LIGHTING PRODUCT CATALOGUE-APRIL 2022

Terms and Conditions

- MRP rates are inclusive of GST. These are the maximum recommended prices. However, dealers/retailers are free to sell below the maximum recommended prices.
- The price are subject to change without any prior notice.
- All prices are subject to general terms and conditions of the company.
- Disputes, if any, are subject to Delhi jurisdiction only.
- This price list supersedes all previous price lists.
- Every effort has been made to ensure accuracy in compilation of technical/commercial details
 within this publication. However, in case of a discrepancy, the management's decision shall
 be final
- Specifications and performance data are constantly changing; current details should, therefore, be checked with the company.
- Displayed product images in the catalogue are only for indicative purposes and may differ from the actual product.
- Lumen declared in catalogue is for Cool White (6000K/6500K) CCT at 220-240 Volts.



Lighting Business Unit
Orient Electric Limited
C-130, Sector 63, Noida-201301,
U.P, India

Head Office

Orient Electric Limited

240, Okhla Industrial Area

Phase III. New Delhi-110020