

**Assembly:**


E30 non-M front suspension with E36 non-M spindle, wheel position fixed

**Setting:**

MRT-20006-1W, tie rod lowest position (spacers on top of rod end)

**Ride height, mm****Toe angle, deg °**

100	0,19
125	0,1
150	0
175	-0,09
200	-0,16

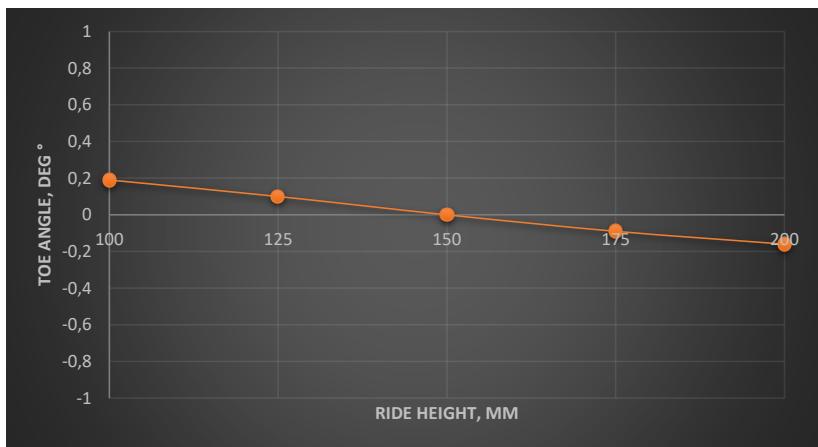

**Assembly:**

E30 non-M front suspension with E36 non-M spindle, wheel position fixed

**Setting:**

MRT-20006-1W, tie rod middle position (spacers one on top and one below the rod end)

**Ride height, mm**      **Toe angle, deg °**

100	-0,11
125	-0,05
150	0
175	0,05
200	0,12



**Assembly:**

E30 non-M front suspension with E36 non-M spindle, wheel position fixed

**Setting:**

MRT-20006-1W, tie rod highest position (spacers below the rod end)

**Ride height, mm**      **Toe angle, deg °**

100	-0,42
125	-0,2
150	0
175	0,19
200	0,4

