



## NATURAL-EFFECT PROTECTIVE WAX

**TERRACOTTA, QUARRY TILES, UNPOLISHED  
STONE AND AGGLOMERATES, TUFF, RESIN**




### WHAT IT'S FOR

- For floor maintenance and matt finish for treatments of terracotta, quarry tiles, tumbled marble and natural stone floors.
- The ideal finishing coat after the application of a water-based water-proofing sealer.
- Ideal on internal walls made of bricks and natural stones, on decorative coverings made of gypsum, manufactured stone and concrete to prevent flaking and strengthen the surface.

### ADVANTAGES

- Provides natural finish.
- Highly concentrated: can be diluted according to requirements.
- Can be polished to achieve a satin finish.
- Completely removable.
- Has a high self-levelling capacity.
- Dirt and dust repellent.

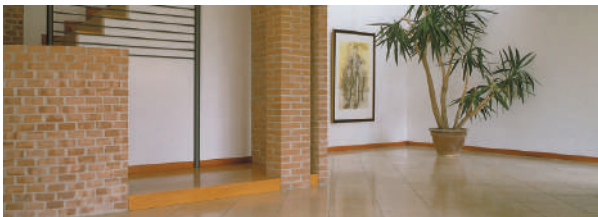

### HOW TO USE IT

**For the protection of floors and bare walls:** Dilute **MATT** slightly to make it more fluid and easier to apply, by adding 200 ml of water per litre of product. On a clean and dry surface, apply one even coat of **MATT** using fleece (wall brush). Wait until completely dry (about an hour) and then apply a second coat in the opposite direction to the first (i.e. horizontal if previously applied vertically or vice-versa). The floor can be walked on after one hour. For a greater sheen, buff with a floor polisher or a wool cloth. If treating terracotta and highly absorbent natural stone (limestone, sandstone, old quarries, rough quartzite), we recommend a base coat of a water-proofing product such as **FOB XTREME** or **W68**.

**For maintenance:**

**Restoring finish (every 2-3 months):** after cleaning the surface with a diluted solution of **CLEANER PRO** (1:200), apply **MATT** diluting 500 ml of product in 5 litres of water. The floor can be walked on once it is dry. Restoring protection (once a year): apply slightly diluted wax (200 ml of water per litre of product) using a fleece pad, cloth or other applicator. The floor can be walked on once it is dry.

**For Anti-flaking treatment:** apply an even coat of undiluted **MATT** to the dry floor using a paintbrush. The treated surface will be dry after approximately one hour.

### COVERAGE

With one litre:

Terracotta 30 m<sup>2</sup>

Stone 30/40 m<sup>2</sup>

"Coverage shown is for guidance purposes only and refers to single coats"

### Packaging

1 litre: boxes of 12.

5 litres: boxes of 4.

### WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.
- Store at room temperature; protect can from frost.

### TEMPERATURES

Storage temperature: from 5° to 30° C.  
This product must be applied to surfaces with temperature between 10°C and 30°C.

### Caution:

*The product can be removed by using the specific wax-remover for water-based waxes **PS87 PRO**.*

*Not recommended for use on outdoor surfaces or in damp environments and where water remains (bathrooms, showers).*

*The product can change the appearance of the material, first spot test a small area to check for any changes.*